

3-10-27W

WELL LOG BUREAU - KANSAS GEOLOGICAL SOCIETY
412 Union National Bk. Bldg., Wichita, Kansas


Company - STANOLIND OIL & GAS COMPANY
Farm - C. D. Wiman No. 1

SEC. 3 T. 10 R. 27W
SEc SE
430' NS1 & 330' WE1 SE/4

County. Sheridan
KANSAS

Total Depth. 4674'
Comm. 10-20-46 Comp. 11-10-46
Shot or Treated.
Contractor.
Issued. 5-3-47

CASING:
13-3/8" 156' Cem. w/200 sx

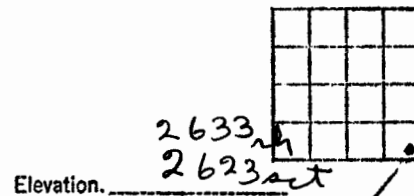

Production. Dry

Figures Indicate Bottom of Formations.

surface sand & clay	0-35
sand & gravel	64
sand wh	97
shale & sholls	1150
shale, sand & sholls	1505
shale, sholls & pyrite	1565
lime sdy	1650
lime	1735
lime & shale	1840
sand & red beds	2075
red bed, shale & sholls	2210
lime	2245
lime & anhydrite	2345
red beds & lime	2420
red bed, shale & sholls	2520
shale-blue & red-	
sholls	2640
red beds & sand	2725
shale & sholls	2915
sand & lime	2985
shale & sholls	3043
sand	3070
lime	3095
shale	3105
lime	3205
lime	3300
shale & lime	3429
lime	3550
shale	3577
lime	3928
lime & chert	3980
lime	4030
lime & chert	4045
lime & shale	4065
shale	4075
lime & shale	4415
lime	4482
lime & chert	4503
lime	4664
lime -Arbuckle Dol.	4674
Total Depth	

Tops:
Anhydrite 2205
Topeka 3570
Lansing 3805
Arbuckle 4604

DST 4662-74', tool open 15 minutes,
recovered 810' sulphur wtr, no oil.