

P.O. Box 169

Great Bend, Kansas 67530

Lease	Frisbie	Well No.	1	Date	10-8-76
County	Ellis	Sec.	18	Twp.	11
		Rng.	18	Elevation	1908 D.F.
Company	Bob Price			Test No.	1
Contractor	Allen Drilling Co.			Zone Tested	Kan. City
Charge To	Bob Price			Ticket #	2183
Approved By	Robert D Gensch			Tester	Blake

Initial Hydro Mud Press.1669.... P.S.I.

Initial Flow Press. ...59... To ...68.... P.S.I. Initial Flow Period30..... Min.

Initial Shut-in Press.1070..... P.S.I. Initial Shut-in30..... Min.

Final Flow Press. ...78... To88.... P.S.I. Final Flow Period30..... Min.

Final Shut-in Press.1056..... P.S.I. Final Shut-in30..... Min.

Final Hydro Mud Press.1659..... P.S.I. TIME TOOL OPEN11:30 P.M.....

Temperature104.....

Mud Weight10..... Viscosity ...43.....

Fluid Loss16.....

Interval Tested3160..... To3220.....

Top Packer Depth3155..... Surface Choke Size

Bottom Packer Depth3160..... Bottom Choke Size5/8.....

Total Depth3220..... Main Hole Size7 7/8.....

Drill Pipe Size ...4½... Wt Rubber Size6 3/4.....


Drill Collar I.D. ...2¼... Ft. Run ...574.....

Blow Weak thru out test.....

Recovery90' Watery Mud..... Top Clock Stopped.....

.....

TOP

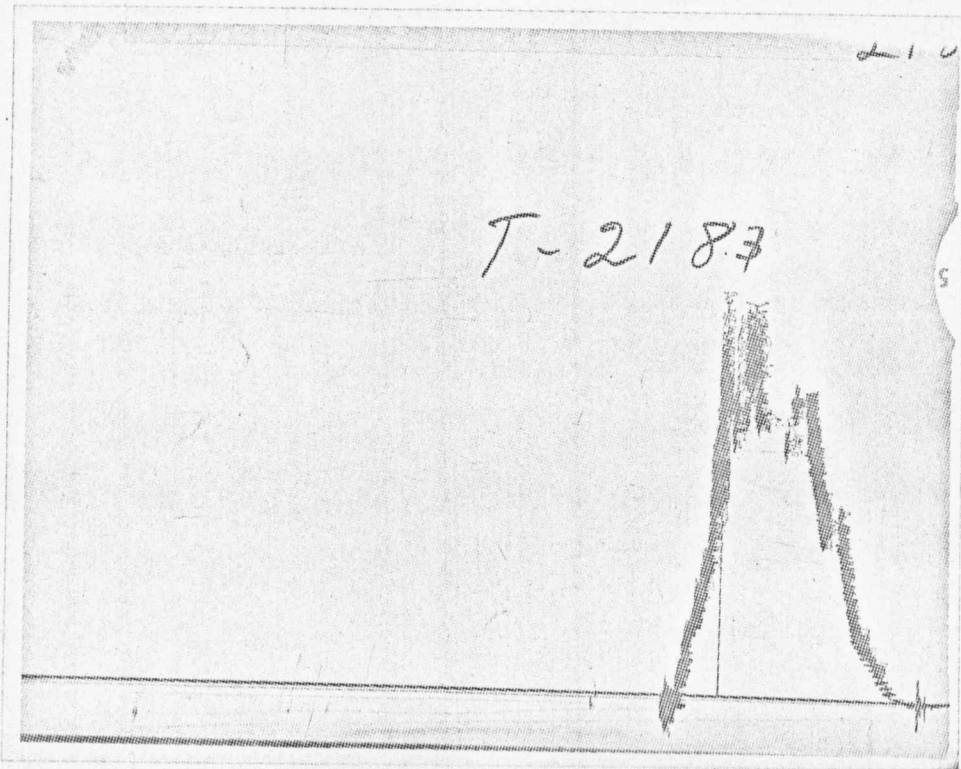

BOTTOM

