

KANSAS

WELL COMPLETION REPORT AND DRILLER'S LOG

WICHITA BRANCH

API No. 15 — 195 — 20,772
County Number

Operator

Kansas Oil Corporation

Address

250 N. Rock Road, Suite 300, Wichita, KS 67208

Well No.

#6

Lease Name

Berens-Ries

Footage Location

330

feet from (N) line

990

feet from (W) line

Principal Contractor

Spartan Drilling

Geologist

Paul Laird

Spud Date

3/26/81

Date Completed

7-22-81

Total Depth

4005

P.B.T.D.

Directional Deviation

None.

Oil and/or Gas Purchaser


Clear Creek

S. 28 T. 11 R22W E W

Loc. NE NW NW

County Trego

640 Acres



Locate well correctly

Elev.: Gr. 2318

DF 2323 KB 2328

CASING RECORD

Report of all strings set — surface, intermediate, production, etc.

Purpose of string	Size hole drilled	Size casing set (in O.D.)	Weight lbs/ft.	Setting depth	Type cement	Sacks	Type and percent additives
Surface		8 5/8"		256'	common	175	2%gel 3%CaCl
Production		4 1/2"		3999'	Haliburtan	750	
		4 1/2"		3999'	60-40posmix	250	

LINER RECORD

PERFORATION RECORD

Top, ft.	Bottom, ft.	Sacks cement	Shots per ft.	Size & type	Depth interval
			2		3983-87
			2		3660-63
			2		3610-3614

ACID, FRACTURE, SHOT, CEMENT SQUEEZE RECORD



Amount and kind of material used	Depth interval treated
treated w/250 gal 15% MCA. Swb. + sqz. w/125 sx. cement	3983-87
treated w/250 gal 15%MCA. Swb + test. Re-acid w/ 250 gal. 15% MCA.	3660-63, 3610-14

INITIAL PRODUCTION

Date of first production		Producing method (flowing, pumping, gas lift, etc.)			
7-31-81		Pumping			
RATE OF PRODUCTION PER 24 HOURS		Oil	Gas	Water	Gas-oil ratio
		54 bbls.	MCF	bbls.	CFPB
Disposition of gas (vented, used on lease or sold)			Producing interval (s)		
None.			3610-14		

INSTRUCTIONS: As provided in KCC Rule 82-2-125, within 90 days after completion of a well, one completed copy of this Drillers Log shall be trans-
mitted to the State Geological Survey of Kansas, 4150 Monroe Street, Wichita, Kansas 67209. Copies of this form are available from the Conservation
Division, State Corporation Commission, 245 No. Water, Wichita, Kansas 67202. Phone AC 316-522-2206. If confidential custody is desired, please note
Rule 82-2-125. Drillers Logs will be on open file in the Oil and Gas Division, State Geological Survey of Kansas, Lawrence, Kansas 66044.

28-11-22W

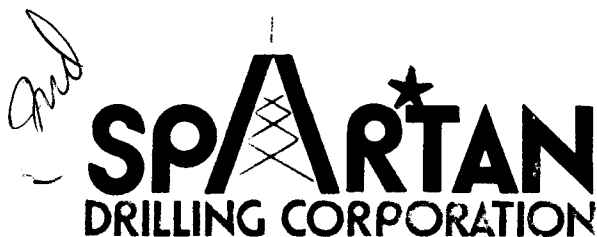

State Geological Survey
WICHITA, BRANCH

CONFIDENTIAL


Renewed 2/26/82

March 13, 1981

DRILLERS LOG

RE: Berens-Ries #6
NE/NW/NW
Sec. 28 T11S-R22W
Trego County, KS

OPERATOR: Kansas Oil Corporation
CONTRACTOR: Spartan Drilling Corporation
COMMENCED: 2/26/81
COMPLETED: 3/12/81

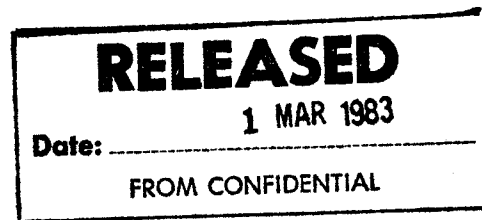

Surface Pipe 251' 12 1/4" w/175 2% Jel


0	275	Shale & Sand
275	1776	Sand & Shale
1776	1927	Lime & Shale
1927	2314	Shale
2314	2906	Shale & Lime
2906	3506	Shale
3506	3570	Shale & Lime
3570	3824	Lime
3824	3973	Lime & Shale
3973	4005	Lime

We certify that the above and foregoing is a true and correct copy of the log on the Berens-Ries #6 in Trego County, Kansas,

SPARTAN DRILLING CORPORATION

Floyd C. Wilson
Floyd C. Wilson
President

Subscribed and sworn to before me this 13th day of February, 1981.



Jane Stansbury
Notary Public