

STATE CORPORATION COMMISSION OF KANSAS
OIL & GAS CONSERVATION DIVISION

WELL COMPLETION OR RECOMPLETION FORM
ACO-1 WELL HISTORY

DESCRIPTION OF WELL AND LEASE

Operator: license # 5198
name A. Scott Ritchie
address 125 N. Market, Suite 950
City/State/Zip Wichita, KS 67202

Operator Contact Person Rocky Milford
Phone (316) 267-4375

Contractor: license # 6033
name Murfin Drilling Co.

Wellsite Geologist Ed Louis
Phone (316) 264-2773

PURCHASER none

Designate Type of Completion
 New Well Re-Entry Workover

- Oil SWD Temp Abd
- Gas Inj Delayed Comp.
- Dry Other (Core, Water Supply etc.)

If OWWO: old well info as follows:
Operator
Well Name
Comp. Date Old Total Depth

WELL HISTORY

Drilling Method: Mud Rotary Air Rotary Cable
9/6/84 9/13/84 9/13/84
Spud Date Date Reached TD Completion Date

35' RTD n/a
Total Depth PBTD

Amount of Surface Pipe Set and Cemented at 218 feet

Multiple Stage Cementing Collar Used? Yes No
If Yes, Show Depth Set feet

If alternate completion, cement circulated
from 218 feet depth to surface w/ 160 SX cmt

API NO. 15 - 195-21,585
County Trego
E/2 SE NW Sec 1 Twp 11S Rge 23 XX West
(location)

3300 Ft North from Southeast Corner of Section
2970 Ft West from Southeast Corner of Section
(Note: locate well in section plat below)


Lease Name Ninemire "D" Well# 1

Field Name Ninemire NE Ext.

Producing Formation none

Elevation: Ground 2261' KB 2266'

Section Plat

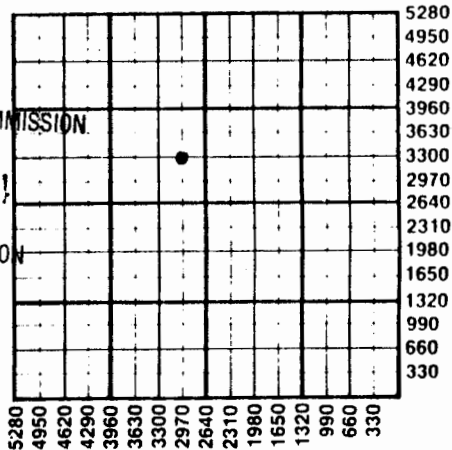

RECEIVED
STATE CORPORATION COMMISSION
DEC 17 1984
CONSERVATION DIVISION
Wichita, Kansas

WATER SUPPLY INFORMATION

Source of Water:
Division of Water Resources Permit #

Groundwater. Ft North From Southeast Corner and
(Well) Ft. West From Southeast Corner of
Sec Twp Rge East West

Surface Water. Ft North From Southeast Corner and
(Stream, Pond etc.) Ft West From Southeast Corner
Sec Twp Rge East West

Other (explain) _____
(purchased from city, R.W.D.#)

Disposition of Produced Water: Disposal Repressuring

Docket # _____

INSTRUCTIONS: This form shall be completed in duplicate and filed with the Kansas Corporation Commission, 200 Colorado Derby Building, Wichita, Kansas 67202, within 90 days after completion or recompletion of any well. Rules 82-3-130 and 82-3-107 apply.

Information on side two of this form will be held confidential for a period of 12 months if requested in writing and submitted with the form. See rule 82-3-107 for confidentiality in excess of 12 months.

One copy of all wireline logs and drillers time log shall be attached with this form. Submit CP-4 form with all plugged wells. Submit CP-111 form with all temporarily abandoned wells.

JAN 9 1985

WELL LOG

INSTRUCTIONS: Show important tops and base of formations penetrated. Detail all cores. Report all drill stem tests giving interval tested, time tool open and closed, flowing and shut-in pressures, whether shut-in pressure reached static level, hydrostatic pressures, bottom hole temperature, fluid recovery, and flow rates if gas to surface during test. Attach extra sheet if more space is needed. Attach copy of log.

Drill Stem Tests Taken Yes No
 Samples Sent to Geological Survey Yes No
 Cores Taken Yes No

Formation Description
 Log Sample

Name	Top	Bottom
Anhydrite	1743'	(+ 523)
B/Anhydrite	1786'	(+ 480)
Topeka	3284'	(-1018)
Heebner	3500'	(-1234)
Toronto	3522'	(-1256)
Lansing	3536'	(-1270)
B/KC	3756'	(-1490)
Marmaton	3858'	(-1592)
LTD	3914'	(-1648)

DST #1 from 3603' to 3620' (70' zone). Recovered 210' of gas in pipe, 30' of oil & gas cut mud, & 90' of mud cut oil.
 IFP:31-31#/30"; ISIP:159#/45";
 FFP:53-53#/30"; FSIP:127#/45".

DST #2 from 3655' to 3726' (140', 160', & 180' zones. Recovered 150' of mud, no show of oil.
 IFP:63-106#/30"; ISIP:1077#/45";
 FFP:159-invalid/30"; FSIP:1035#/45".

DST #3 from 3725' to 3770' (200' & 220' zones). Recovered 10' of mud.
 IFP:31-31#/30"; ISIP:42#/30";
 FFP:31-31#/30"; FSIP:42#/30".

CASING RECORD new used

Report all strings set - conductor, surface, intermediate, production, etc.

Purpose of string	size hole drilled	size casing set (in O.D.)	weight lbs/ft.	setting depth	type of cement	# sacks used	type and percent additives
Surface	12 1/4"	8-5/8"	23#	218'	quickset	160	none
.....
.....

PERFORATION RECORD

Acid, Fracture, Shot, Cement Squeeze Record

shots per foot	specify footage of each interval perforated	(amount and kind of material used)	Depth
.....
.....
.....

TUBING RECORD

size set at packer at

Liner Run Yes No