

10-12-1960


BRUNDAGE POOL

All datums shown on the three producing wells in the pool are Lane-Wells electric log tops. The datums on Feel-Hardman No. 1 Sutton are four to five feet lower than the original tops reported. Please destroy any previous plots in your hands with incorrect datums.

The comments in this report relative to the structural position of No. 1 Beller were written before the tops on No. 1 Sutton were re-checked.

BRUNDAGE POOL

Township 12 Range 15W County Russell State Kansas

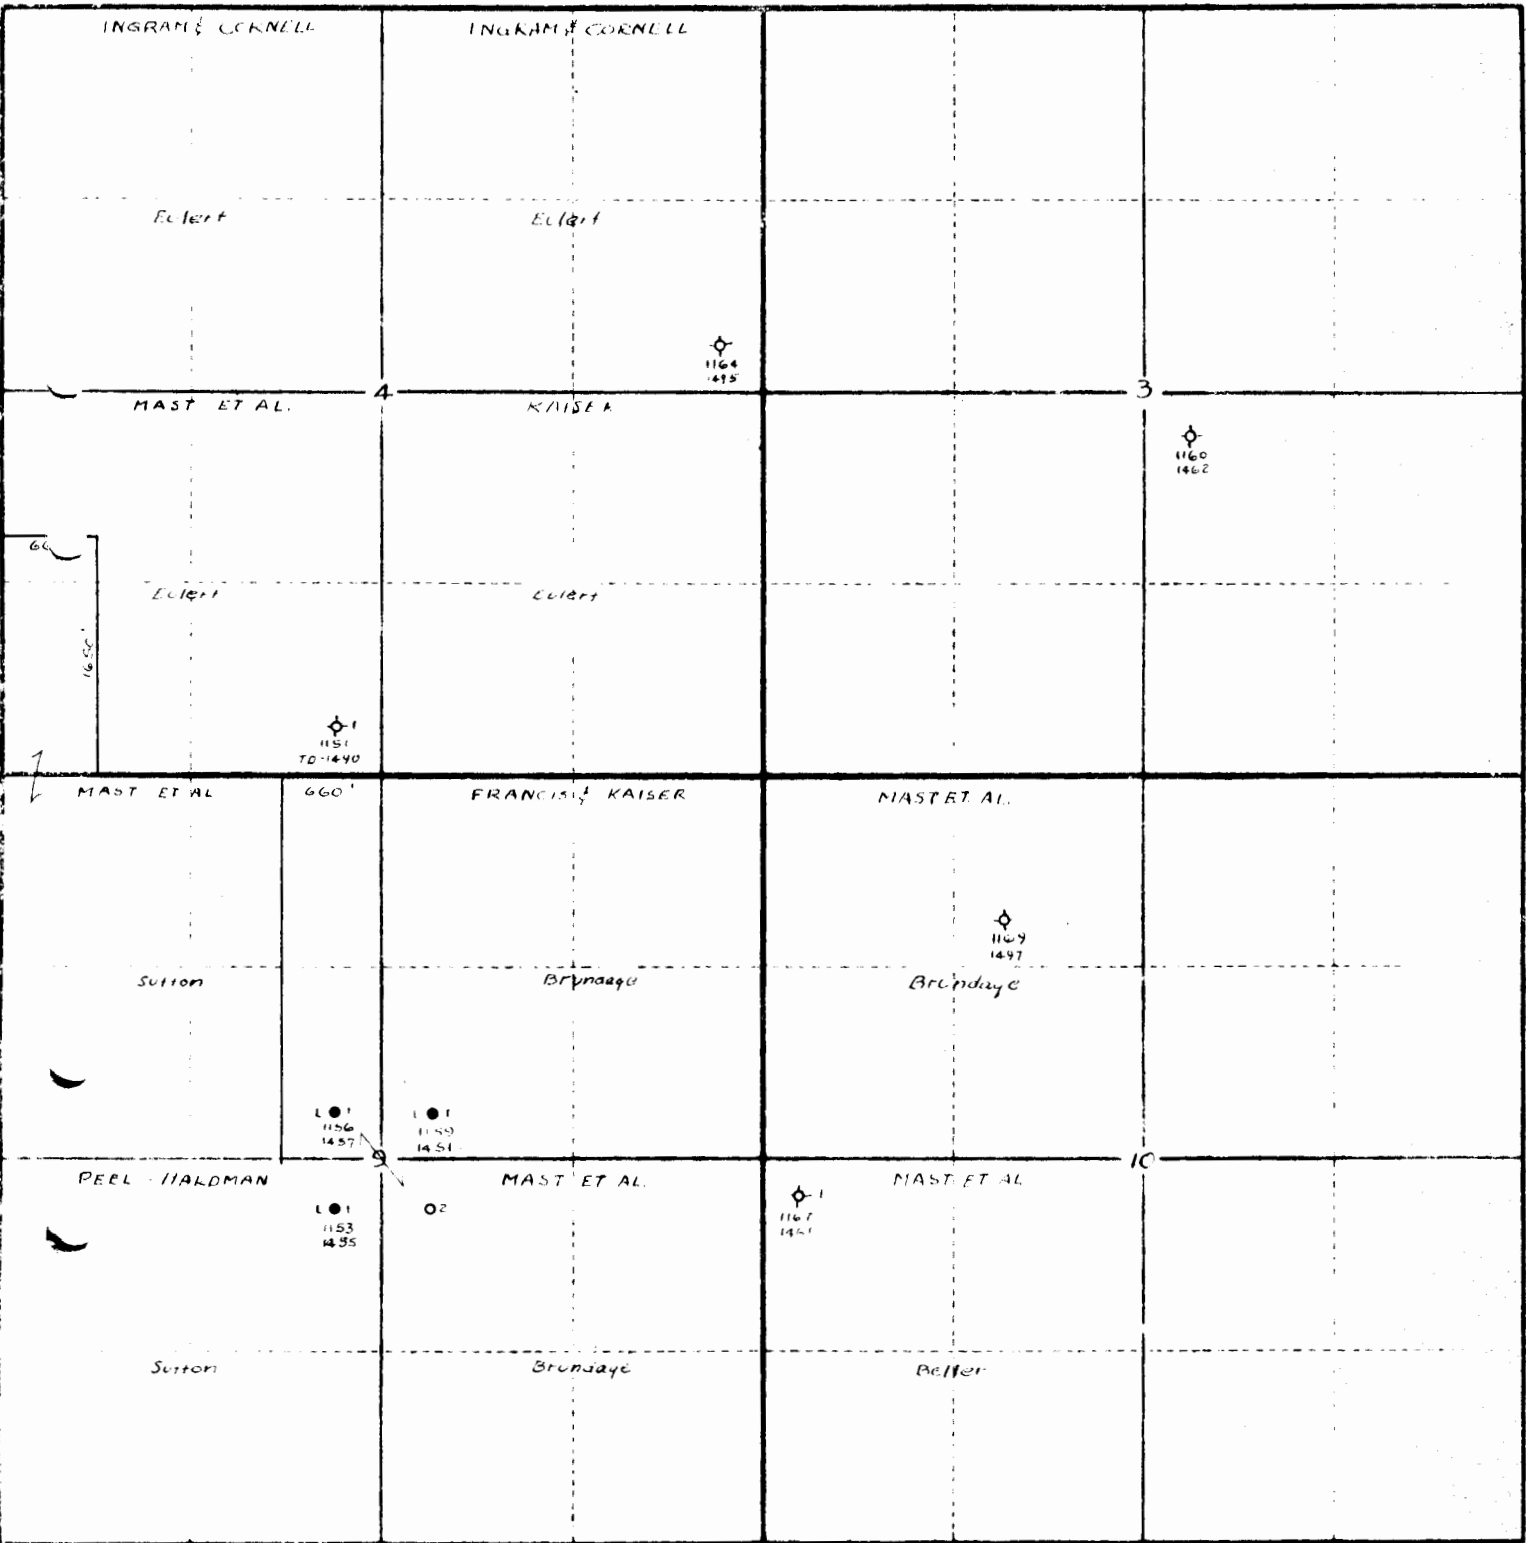

FORM 45

Oct. 16, 1957 - L.H.C.
Revised 1-21-57

16-12-15w

-5- Mast Drilling, Inc. No. 1 Beller

BIT RECORD

No.	Make	Type	Depth	Footage	Hours
1	Hughes	OWV Re-tip	323 - 890	567	10-3/4
2	"	OSC-3	890 - 1647	757	23-1/2
3	"	OWV Re-run	1647 - 1810	163	10-3/4
4	"	OWV Re-run	1810 - 1928	118	11
5	"	OWV Re-tip	1928 - 2030	102	6-1/4
6	Security	S6	2030 - 2285	255	17-1/4
7	Hughes	OSC	2285 - 2765	480	29-1/2
8	"	OWV	2765 - 2938	223	24-1/2
9	Security	M & N	2988 - 3170	182	23-3/4
10	Hughes	OWV	3170 - 3267	97	10-3/4

DAILY PROGRESS

November 5 Surface hole; set surface; job completed 11:15 P.M.
 " 6 T.D. 323 WOC. Start under surface 11:15 P.M.
 " 7 Drilling 1165
 " 8 " 1665
 " 9 " 1931
 " 10 " 2283
 " 11 " 2695
 " 12 " 2896
 " 13 " 3008
 " 14 " 3113
 " 15 T.D. 3253 On bottom DST No. 3.
 " 16 T.D. 3267 S.D. for orders.