

9-12-15W  
NE SW NW

DRILLERS' WELL LOG

DATE COMMENCED: January 5, 1976  
DATE COMPLETED: January 10, 1976

Louis M. Mai  
SUTTON # 6  
NE SW NW of Sec 9-T12-R15  
Russell County, Kansas

Est. Elevation: 1734 K.B.


0 - 36'	Surface Soil, Clay and Sand
36 - 75'	Post Rock and Shale
75 - 252'	Shale and Sand Streaks
252 - 346'	Sand
346 - 480'	Shale and Sand Streaks
480 - 785'	Red Bed
785 - 828'	Anhydrite
828 - 1400'	Red Bed and Shale
1400 - 1550'	Shale, Lime, Shells
1550 - 1706'	Lime, Shale Streaks
1706 - 2838'	Lime and Shale
2838 - 2842'	Shale
2842 - 2860'	Lime and Shale
2860 - 2872'	Lime
2872 - 2890'	Shale
2890 - 3020'	Lime
3020'	RTD

FORMATION TOPS

Anhydrite	785
Howard	2583
Severy	2605
Topeka	2614
Heebner	2838
Toronto	2860
Douglas	2872
Kansas City	2890
RTD	3020

SURFACE PIPE: Set 530' of used 8 5/8", 28# pipe w/285 sacks Common, 2% Gel, 3% cc.

PRODUCTION PIPE:  
Ran new & used 14 & 15# 5 1/2" casing @ 3019' w/250 sacks 50/50 Pozmix w/18% salt & .75% CFR2 and floeal.

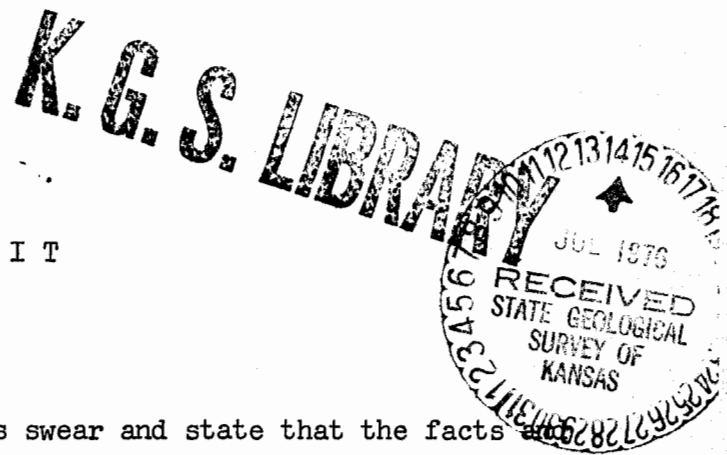

A F F I D A V I T

STATE OF KANSAS }  
COUNTY OF BARTON } ss.

Leonard Williamson, of lawful age, does swear and state that the facts and statements herein contained are true and correct to the best of his knowledge.

Leonard Williamson