

OWWO
WELL LOG

Vinecent Oil Corp

ISERNI DRILLING COMPANY at 21, Owner - Drilling No. 2
SW 1/4 SS 1/4 NE 1/4 Section 3, Township 12, Range 17,
SW SE NE Ellis County, Kansas

8-12-17W
SW SE NE
Ellis County

State Geological Survey
WICHITA, BRANCH

Elevation: 2113 DF

Figures indicate bottom of formation
0 to 40 post rock

Core Record:

1 5/8" set at 202'

2 1/2" set at 3637'

Logs: REM

Booker	3062	(-942)
Leebner	3297	(-1177)
Toronto	3313	
Base Oread	3332	
Lansing	3344	(-1224)
Simpson	3609	(-1439)
Arbuckle	3635	(-1515)

270	blue shale
500	shale & cherty lime
710	Dakota sand
735	shale, red bed & sand
950	sand
1340	red bed & shale
1376	anhydrite
1455	shale & shells
1670	shale & red bed
1910	shale & shells
2015	shale
3530	lime & shale
3615	lime
3642	shale & lime
3642	Total Rotary Depth

Rotary Commenced 5-21-52
Completed 6-2-52

CABLE TOOL WORK

Cable Tools Commenced 6-5-52
Completed 6-12-52

Moved in cable tools, drilled 1' of new hole. Cleaned out and acidized with 500 and 2000 gallons. Perforated with 43 holes from 3517 to 3529. Acidized with 1000 gallons. Set Baker plug at 3510 and perforated from 3493 to 3504. Acidized with 1000 gallons. Perforated from 3434 to 3442 with 43 shots. Set Baker plug at 3460.


3460 Total Plug Back Depth

STATE OF KANSAS)
COUNTY OF BARTON) SS

I, M. M. Shropshire, Part Owner of the above-described well, being first duly sworn on oath, declare: That I have knowledge of the facts, statements and matters herein contained pertaining to the log of the above-described well, as filed, and that the same are true and correct.

M. M. Shropshire

Subscribed and Sworn to before me this 22nd day of July, 1952.

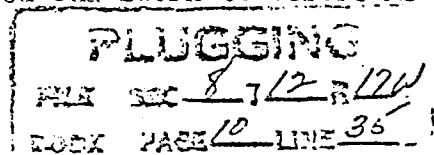

George A. Meyer
Notary Public

commission expires Feb. 10, 1955.