


SUPERIOR TESTERS ENTERPRISES L.L.C.

DRILL STEM TEST REPORT

1(800)792-6902

GREAT BEND, KANSAS 67530

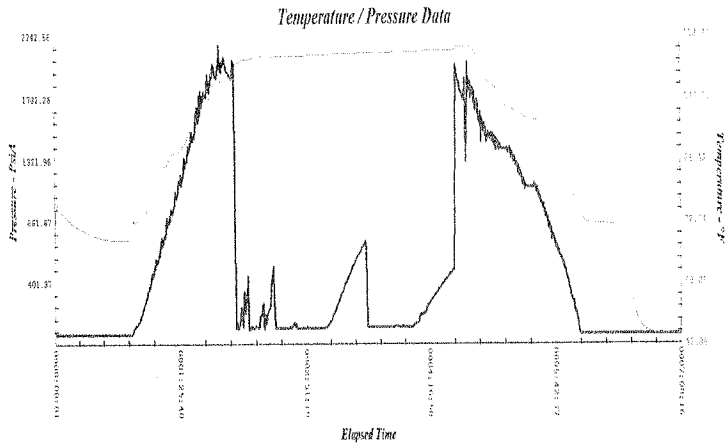

Tool serial number: 4063
Test start: 10/11/2007 09:04:34

1	Initial Hydrostatic Pressure	2056
2	Initial Flow Pressure	56
3	Final Initial Flow Pressure	62
4	Initial Shut-In Pressure	709
5	Initial Final Flow Pressure	62
6	Final Flow Pressure	69
7	Final Shut-In Pressure	497
8	Final Hydrostatic Pressure	2020

Maximum Temperature 110

GENERAL INFORMATION

COMPANY NAME CASTLE RESOURCES INC	
TEST DATE 10/10/07	LEASE AND WELL NUMBER BITTEL #1
SECTION-TOWN-RANGE 22-12-20W	FORMATION TESTED LANSING J, MARMINT
STATE KANSAS	DRILL STEM TEST NUMBER 1
COUNTY ELLIS	REPORT NUMBER 15100
ELEVATION GROUND LEVEL 2270	ELEVATION KELLY BUSHINGS 2274
COMPANY REPRESENTATIVE JERRY GREEN	TESTING ENGINEER JARED SCHECK

TOOL SETTING INFORMATION

TEST INTERVAL (From) 3772	TOP PACKER DEPTH 3767
TEST INTERVAL (to) 3924	BOTTOM PACKER DEPTH 3772
ANCHOR LENGTH 152	NUMBER OF PACKERS 4
TOTAL DEPTH (ft) 3990	PACKER SIZE 6 3/4
	HOLE SIZE 7 7/8

FLOW TIMES

<i>INITIAL OPEN</i>		<i>FINAL OPEN</i>	
TOOL OPEN (from) 7:43P		TOOL OPEN (from) 9:13	
TOOL OPEN (to) 8:43		TOOL OPEN (to) 9:43	
DURATION (min.) 60		DURATION (min.) 30	
<i>INITIAL SHUT-IN</i>		<i>FINAL SHUT-IN</i>	
TOOL CLOSED (from) 8:43		TOOL CLOSED (from) 9:43	
TOOL CLOSED (to) 9:13		TOOL CLOSED (to) 10:13P	
DURATION (min.) 30		DURATION (min.) 30	

INITIAL FLOW

WEAK BUT BUILDING BLOW BUILT 4 1/2 INCHES IN 60 MIN
BLOW SURGED THROUGHOUT OPEN
NO BLOW BACK

FINAL FLOW

SURGED NO BLOW 10 MIN IN FLUSHED TOOL GOT SURGE AT SURFACE
FLUSHED 20 MIN INTO OPEN SURGED WEAK SURFACE BLOW NO BLOW BACK

Company: CASTLE RESOURCES INC Lease & Well No. BITTEL #1 Test #: 1 Date: 10-10-07 SEC. 22
 TWP. 12 RGE. 20

SUPERIOR TESTERS ENTERPRISES L.L.C.

DRILL STEM TEST REPORT

GREAT BEND, KANSAS 67530 (800)792-6902

GENERAL INFORMATION

COMPANY NAME	CASTLE RESOURCES INC	LEASE AND WELL NUMBER	BITTEL #1
TEST DATE	10/10/07	FORMATION TESTED	LANSING J, MARMINTON
SECTION-TOWN-RANGE	22-12-20W	DRILL STEM TEST NUMBER	1
STATE	KANSAS	REPORT NUMBER	15100
COUNTY	ELLIS	ELEVATION KELLY BUSHINGS	2274
ELEVATION GROUND LEVEL	2270	TESTING ENGINEER	JARED SCHECK
COMPANY REPRESENTATIVE	JERRY GREEN		

EXTRA EQUIPMENT


JARS	NO	EXTRA PACKER (3RD)	YES
SAFETY JOINT	NO	EXTRA PACKER (4TH)	YES NO CHARGE
ELECTRONIC RECORDER	YES	STRADDLE	YES
CIRCULATING SUB	NO	HOOK WALL	NO
	169 MILES ROUND TRIP FROM	SAMPLER	NO
		GREAT BEND	
TOP RECORDER DEPTH	3758	BOTTOM RECORDER DEPTH	3990
RECORDER NUMBER	4023	RECORDER NUMBER	3088

WELL INFORMATION

DRILLING CONTRACTOR	ANDERSON DRILLING RIG #1		
DRILL PIPE LENGTH	3728	DRILL COLLAR LENGTH	30.06
DRILL PIPE I.D.	3.8	DRILL COLLAR I.D.	2.25
TOOL JOINT SIZE	4 1/2 X.H.	TOOL JOINT SIZE	4 1/2 X.H.
CHLORIDES-PITS	9,200	MUD WEIGHT #/GAL	9.7
CHLORIDES-DST		VISCOSITY	51
		WATER LOSS	11.6

COMMENTS

Temperature / Pressure Data

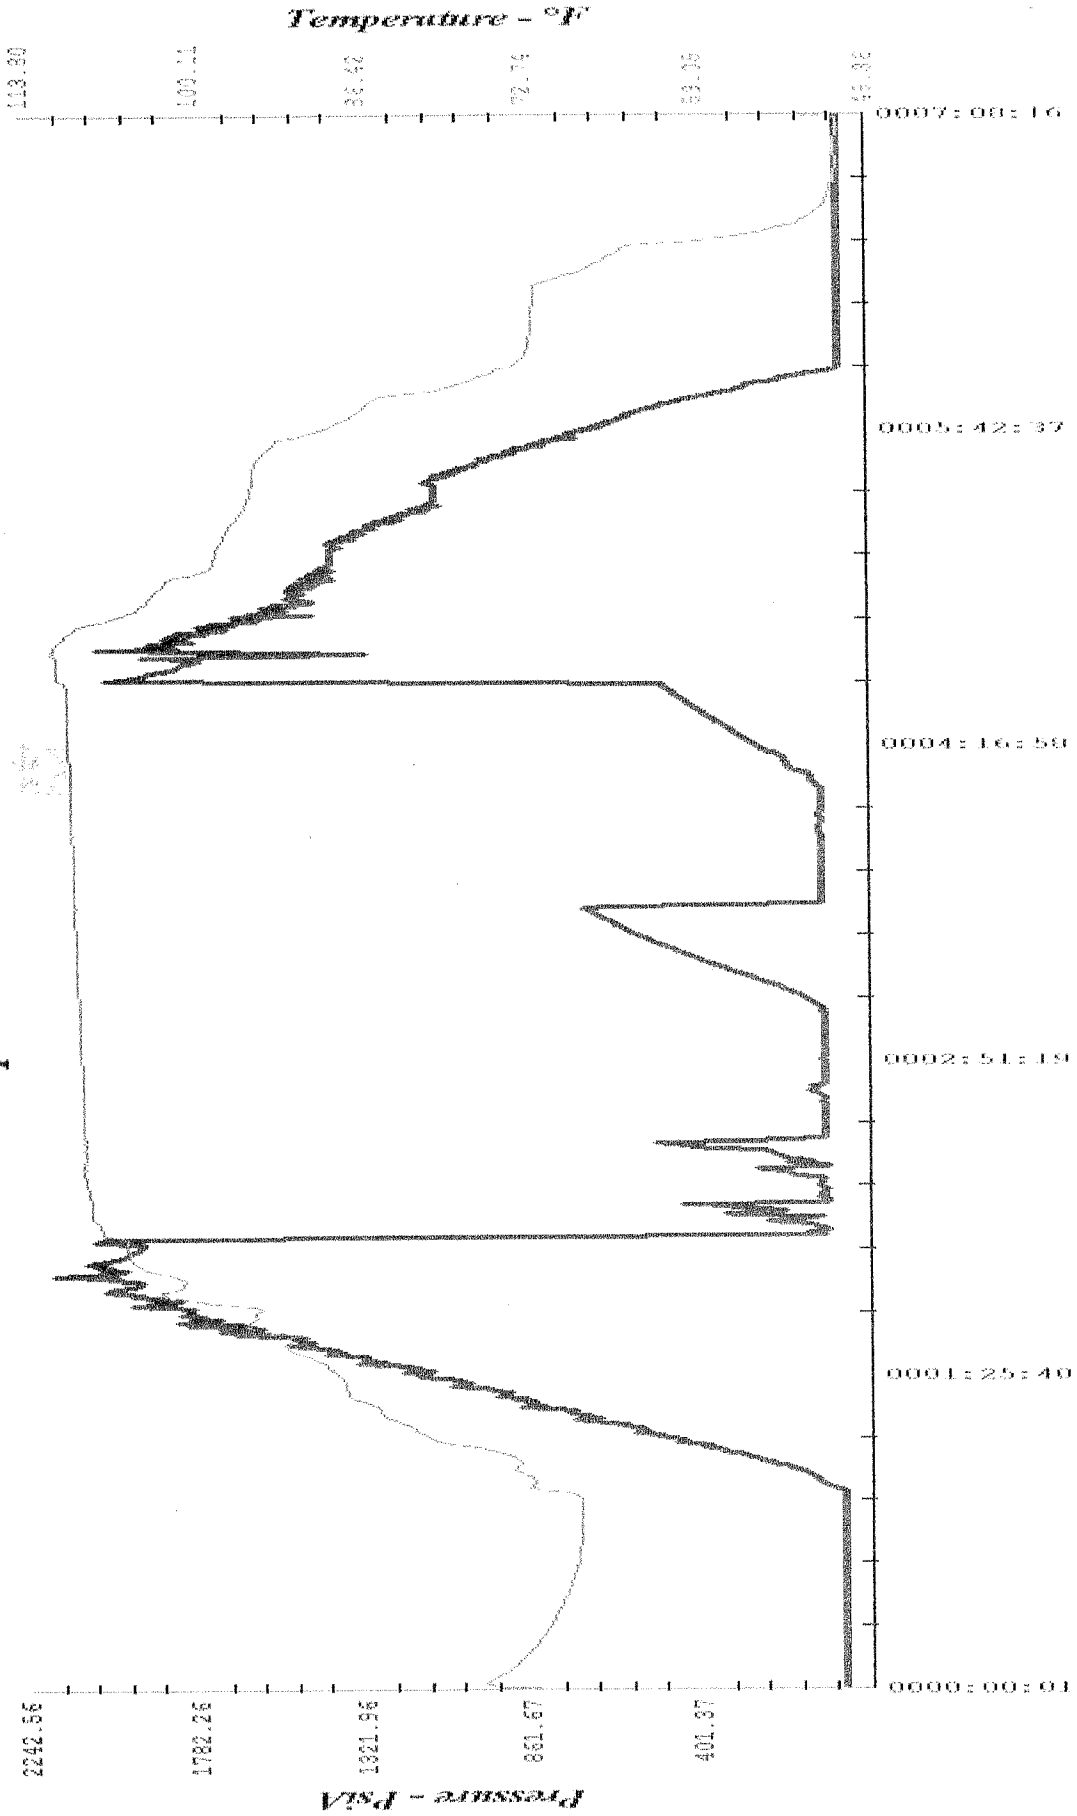

Tool serial number: 4005
Test start: 10/11/2007 09:04:34