


WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

Company- CENTRAL COMMERCIAL COMPANY
Farm- U. S. Government No. 6

SEC. 35 T. 12 R. 22W
SW SW NW

Total Depth. 4212'
Comm. 1-23-57 Comp. 2-2-57
Shot or Treated.
Contractor. Peel Brothers, Incorporated
Issued. 4-20-57

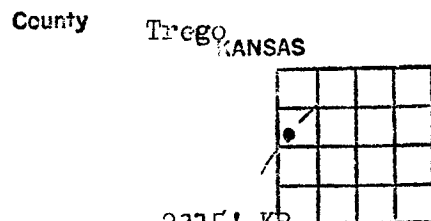

CASING:
8 5/8" 237' cemented

Elevation. 2315' KB

Production. Dry

Figures indicate Bottom of Formations.

Post rock	25
shale	725
shale & sand streaks	960
sand	1050
shale & sand	1230
sand	1465
Red Bed	1750
Anhydrite	1780
red bed and shale	2100
shale & lime	3445
lime	3585
lime & shale	3635
lime	3895
lime & shale	3965
lime & chert	4074
chert	4125
chert & lime	4212
Total Depth	

Halliburton Radiation
Guard Log was made

TOPS KB
(Taken from Halliburton Log)

Anhydrite	1750
Topeka	3431
Heebner	3627
Toronto	3647
Lansing	3663
Base/Kansas City	3906
Marmaton Cherty lime	3990
Cherty Conglomerate	4104
Arbuckle	4191