



ENERGY THREE, INC.

P.O. BOX 1505

GREAT BEND, KANSAS 67530

RHODEN # 1: DAILY DRILLING INFORMATION . . .

ELEV. = 2458' Gr.
2463' KB.

SE NW NE
Sec. 14-12S-23W
TREGO COUNTY, KANSAS

3-23-85 MOVED IN, RIGGED UP, STARTED TO SPUD.

3-24-85 @ 265' - 7:00 A.M. 3-24-85
SET 8 5/8" 23# SURFACE CASING @ 262'. ALLIED CEMENTING COMPANY CEMENTED W/ 175 SACKS OF 60/40 POZMIX; 3% C.C., 2% GEL. CEMENT CIRCULATED O.K. PLUG DOWN @ 1:00 A.M. 3-24-85.

3-25-85 DRILLING @ 1985' - 7:00 A.M. 3-25-85.
TOP OF ANHYDRITE = 1892' (≠ 571)

3-26-85 DRILLING @ 2930' - 7:00 A.M. 3-26-85


3-27-85 DRILLING @ 3445' - 7:00 A.M. 3-27-85
MUD VISC. = 35 MUD WT. = 9.8 WATER LOSS = 16


3-28-85 DRILLING @ 3835' - 7:00 A.M. 3-28-85
MUD VISC. = 43 MUD WT. = 10.1 WATER LOSS = 9
TOP OF TOPEKA = 3477' (- 1014)
TOP OF HEEBNER = 3699' (- 1236)
TOP OF TORONTO = 3719' (- 1256)
TOP OF LANS.-KC = 3733' (- 1270)

3-29-85 DRILLING @ 4095' - 7:00 A.M. 3-29-85
MUD VISC. = 45 MUD WT. = 10.1 WATER LOSS = 10.4

3-30-85 DRILLING @ 4170' - 7:00 A.M. 3-30-85
MUD VISC. = 43 MUD WT. = 10.0 WATER LOSS = 13.2
D.S.T. # 1: FROM 4095' TO 4124' (MARMATON CHERT)
TIMES = 30 - 45 - 30 - 45
RECOVERED 25' OF DRILLING MUD.
INITIAL FLOW PRESSURE = 36 - 36
FINAL FLOW PRESSURE = 36 - 36
INITIAL SHUTIN PRESS. = 1121#
FINAL FLOW PRESSURE = 960#
TOP OF MARMATON CHERT = 4098' (- 1675)

(CONT.)

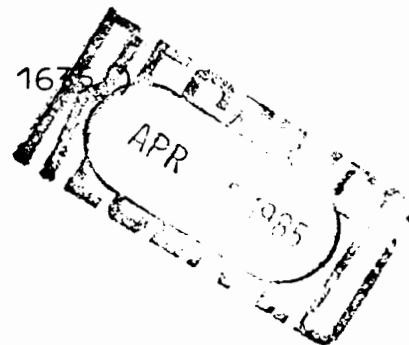



ENERGY THREE, INC.

P.O. BOX 1505

GREAT BEND, KANSAS 67530

RHODEN # 1: DAILY DRILLING INFORMATION (PAGE -2-)

3-31-85 R. T. D. = 4193'


TOP OF ARBUCKLE = 4176' (- 1713)

GREAT GUNS RAN OPEN HOLE LOG - FOUND NOTHING PRODUCTIVE.
PLUGGED WELL AS D & A - JOB COMPLETE 10:30 P.M. 3-30-85.

ELECTRIC LOG TOPS:

| | | | |
|-------------|---|-------|------------|
| TOPEKA | = | 3475' | (- 1012) |
| HEEBNER | = | 3696' | (- 1233) |
| TORONTO | = | 3716' | (- 1253) |
| LANS.-KC | = | 3731' | (- 1268) |
| MARM. CHERT | = | 4088' | (- 1625) |
| ARBUCKLE | = | 4169' | (- 1706) |
| LOG T.D. | = | 4195' | |

R 23 W

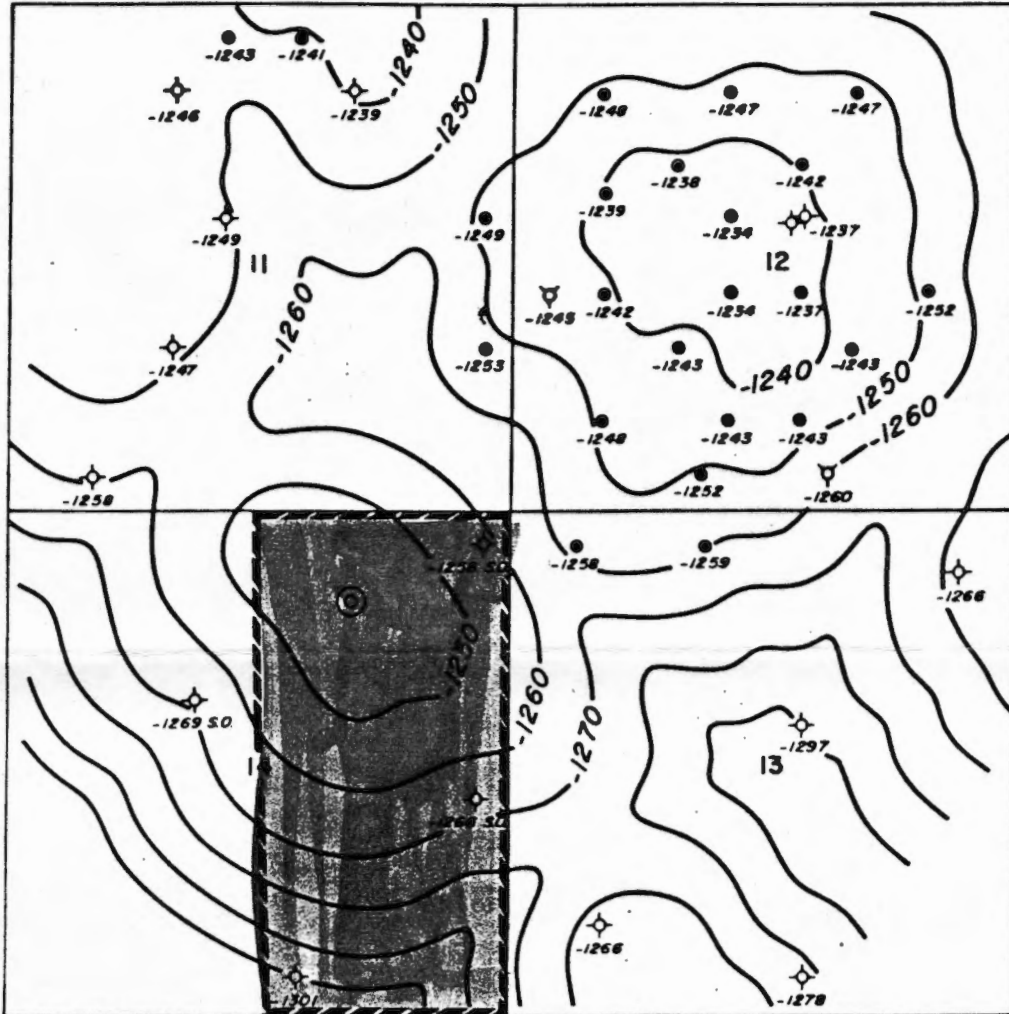

T
12
S

ENERGY THREE, INC.

RHODEN PROSPECT
TREGO CO., KANSAS

Geol.: Jene C. Darmstetter
Date: 2-7-85

Datum: Lansing
C.I. = 10'