Krotky

Dolman

T14S
11
80 acres
24-14-11
SE-SE
Russell

SE¼
27-15S-R9
160

913
658-4655
4655

LA 44323

~~Hunter~~
Lincoln

529-2483
Hunter
Eelon
LA 4

Roy Stopple
658-3373

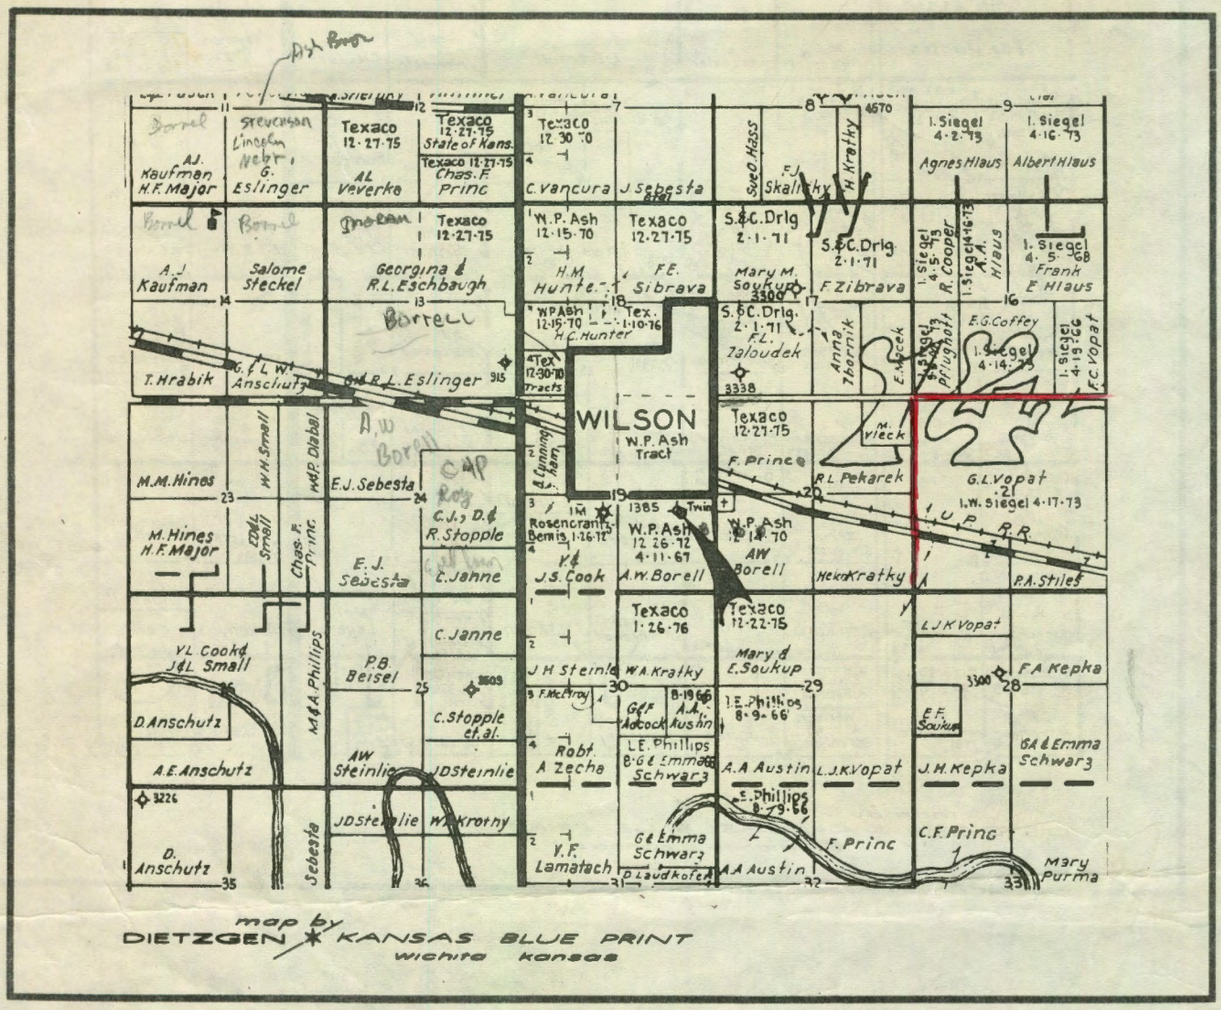

Pekarek - 913-658-3521
in hosp at Ellsworth 913-658-3373 stopple

INDEPENDENT OIL & GAS SERVICE DECEMBER 22, 1966

WILL P. ASH, WICHITA, HAS SET PIPE AT HIS ELLSWORTH COUNTY WILDCAT TEST, THE #1 BORELL 'TWIN', NW NE SE, 19-14-10W. ROTARY TOTAL DEPTH IS 3194 FEET WITH PIPE SET AT 2900 FEET. LANSING WAS TOPPED AT 2795 (-1117' KB). A DRILL STEM TEST FROM 2795-2815 HAD 1130 FEET GAS IN PIPE AND RECOVERED 70 FEET HEAVY OIL CUT MUD AND 120 FEET GASSY OIL. SHUT-IN PRESSURES WERE 905-895 POUNDS WITH FLOW PRESSURES 40-90 POUNDS. OTHER MARKERS CALLED BY JACK MARONDE, USING A 1678 FOOT KELLY BUSHING ELEVATION, ARE: GRAND HAVEN 2058, DOVER 2083, TARKIO LIME 2136, WILLARD 2160, ELMONT 2200, HOWARD 2344, TOPEKA 2423, HEEBNER 2669, TORONTO 2687, DOUGLAS 2703, BROWN LIME 2762, BASE KANSAS CITY 3049 AND ARBUCKLE 3160 FEET. SAGE DRILLING CONTRACTED THE TEST WHICH IS ON THE SOUTH SIDE OF WILSON, KANSAS.

3160
1678
-1482

3160
1117
-2043