


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

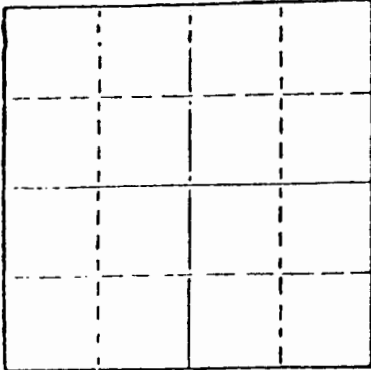

Locate well correctly on above
Section Plot

Russell County. Sec. 34 Twp. 14 Rge. 13 E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
NW/NW/SW
Lease Owner Shields Oil Producers
Lease Name OWENS "B" Well No. 2
Office Address Shields Building, Russell, Kansas 67665
Character of Well (Completed as Oil, Gas or Dry Hole)

Date Well completed 19
Application for plugging filed July 7 1977
Application for plugging approved 19
Plugging commenced September 13 1977
Plugging completed September 19 1977
Reason for abandonment of well or producing formation
depleted
If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Duane Rankin
Producing formation Depth to top Bottom Total Depth of Well 2874'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	205'	none
				5 1/2"	2847'	1,984.12'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from feet to
feet for each plug set.

Dumped sand to 2200' and 5 sacks cement.
Shot casing at 2,000'.
Pulled a total of 85 joints of 5 $\frac{1}{2}$ " casing.
Plugged well with 3 sacks hulls, 15 sacks gel and 100 sacks cement with 5% added gel.


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Rockhold Engineering, Inc.
Box 698, Great Bend, Kansas 67530

STATE OF Kansas COUNTY OF Barton, ss.
James W. Rockhold (employee of owner) or (owner or operator
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature) James W. Rockhold
Box 698, Great Bend, Kansas 67530
(Address)

SUBSCRIBED AND SWORN TO before me this 20th day of September, 19 77



Marla K. Haslam
Notary Public.

My commission expires May 21, 1980 Marla K. Haslam