


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

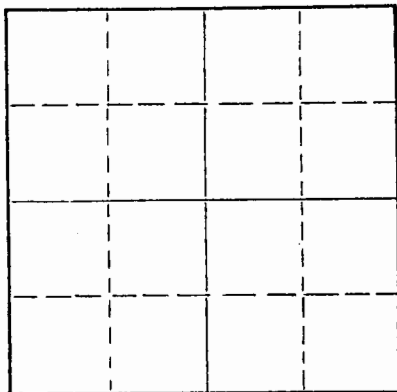

Locate well correctly on above
Section Plat

Russell County. Sec. 33 Twp. 14 Rge. 13 (E) (W) X
Location as "NE/CNW%SW%" or footage from lines SW NW SW
Lease Owner Morgenstern & Specter
Lease Name Hefferman Well No. 3
Office Address Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed 11-7-51 1951
Application for plugging filed Aug. 18, 1956 1956
Application for plugging approved Aug. 20 1956
Plugging commenced 8-25 1956
Plugging completed 8-30 1956
Reason for abandonment of well or producing formation Failure to produce profitably
If a producing well is abandoned, date of last production Aug 1956
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Milton Galyardt
Producing formation Tarkia Depth to top 2226 Bottom 2250 Total Depth of Well 2250 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				<u>5 1/2"</u>	<u>2233'</u>	<u>1628'</u>

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Measured into TD PB 2240'

Plugging started 8-25-56. Finished 8-30-56.

Plugged off bottom with sand to 2213' and dumped 5 sacks cement with bailer and shot 5 1/2" casing at 1712' and 1614'. Pulled pipe out of hole and plugged well with heavy mud to 1000' and set permanent rock bridge. Dumped 50 sacks cement. Filled hole with heavy mud to 25' and mixed to 30 sacks for cop on well.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor J. O. Borbes Casing Pulling Co.
Address Box 221, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Russell, ss.

_____, (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) _____

Morganstern & Specter

Russell, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 6th day of September, 1956

My commission expires Dec. 1, 1959

Elmer Cady
Notary Public.

PLUGGING

FILE SEC 33 T 14 R 13W

BOOK PAGE 91 LINE 31