

WELL PLUGGING RECORD

Russell County. Sec. 33 Twp. 14 Rge. 13 (E)W (W)

Location as "NE/CNW%SW%" or footage from lines NE SW SW

Lease Owner Morgenstern Supply Company

Lease Name Hefferman Well No. 2

Office Address Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole)

Date well completed 19

Application for plugging filed 19

Application for plugging approved 19

Plugging commenced 10-29-65 19

Plugging completed 11-1-65 19


Reason for abandonment of well or producing formation Depleted.

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

All Information Completely
Like Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

NORTH

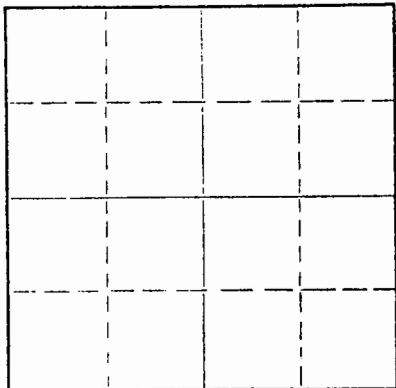

Locate well correctly on above
Section Plat

Name of Conservation Agent who supervised plugging of this well Don Truan

Producing formation Depth to top Bottom Total Depth of Well 2265 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				12 1/2"	19'	None
				10"	335'	None
				8"	673'	None
				5-1/2"	2257'	1693'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked hole to 2265', sanded hole to 2240' and dumped 5 sacks of cement @ 2240' with dump bailer. Pulled 5 1/2" casing to 450' and circulated with 10 sacks of gel mud. Pulled casing to 300' and pumped 40 sacks of cement. Pulled 5 1/2" casing and pumped in 40 sacks of cement to cap well.

NOV 17 1965
CONSERVATION DIVISION
STATE OF KANSAS

PLUGGING COMPLETE.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KNIGHT CASING PULLING COMPANY

Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.

Noel J. Knight (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight

Chase, Kansas

(Address)

SUBSCRIBED AND SWORN TO before me this 11th day of November, 1965

Melton J. Volin

Notary Public.

My commission expires May 20, 1968