


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Commission

P. O. Box 17027
Wichita, Kansas 67217
NORTH

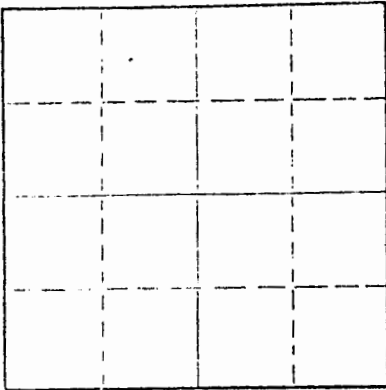

Locate well correctly on above
Section Plat

Russell County, Sec. 28 Twp. 14 Rge. 13 (E) (W)X
Location as "NE/CNW/SW" or footage from lines S/2-SW-SW
Lease Owner Shields Oil Producers
Lease Name ROGG "B" Well No. 4
Office Address Shields Bldg. Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19____
Application for plugging filed 19____
Application for plugging approved 19____
Plugging commenced February 9, 1974
Plugging completed February 12, 1974
Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Donald Truan
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 2951 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				20"	16	None
				5 1/2"	2896	2360.02'


Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Squeezed perforations with 5 sacks gel and 50 sacks cement leaving plug at 2500'. Shot casing at 2400'. Pulled a total of 78 joints of 5 1/2" casing. Circulated 25 sacks of gel at 600'. Pumped 50 sacks of cement at 500' and 50 sacks cement at 300'. Capped well with 50 sacks of cement at 40'.

RECEIVED
STATE CORPORATION COMMISSION
FEB 20 1974
CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor Rockhold Engineering, Inc. (If additional description is necessary, use BACK of this sheet)
Address P. O. Box 698 Great Bend, Kansas 67530

STATE OF Kansas COUNTY OF Barton ss.
James W. Rockhold (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

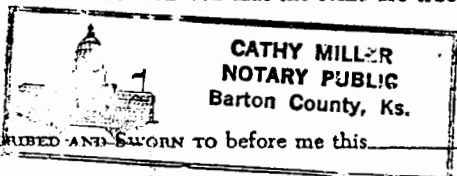

(Signature) James W. Rockhold James W. Rockhold
Box 698 Gt. Bend, Ks. 67530 (Address)
19th day of February, 1974
Cathy Miller
Cathy Miller Notary Public.