


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

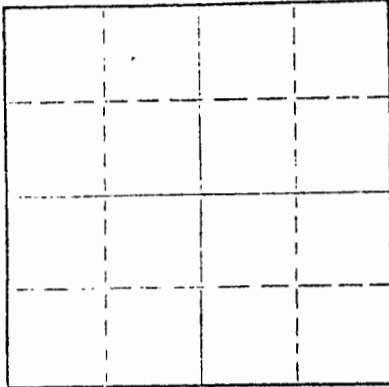

Locate well correctly on above
Section Plat

Russell County. Sec. 28 Twp. 14 Rge. 13 (E) (W)X
Location as "NE/CNW/SW" or footage from lines. NW/NE/NE
Lease Owner Shields Oil Producers
Lease Name GIESE Well No. 11
Office Address Shields Building, Russell, Kansas 67665
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced _____ October 22, 1974
Plugging completed _____ November 5, 1974
Reason for abandonment of well or producing formation Depleted
If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Don Truan
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 2352 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE | PUT IN | PULLED OUT |
|-----------|---------|------|----|-------|--------|------------|
| | | | | 8 5/8 | 215.15 | 215.15' |
| | | | | 7 | 2350 | 1902.31' |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |


Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Pushed a plug to 2250'. Dumped 25' of sand. Dumped 6 sacks cement. Shot casing at 2000 and 1915'. Pulled 10 jts. 8 5/8". Pulled 40 jts. 7" casing. Circulated 25 sacks gel, pulled 3 jts. 7" casing, pumped 50 sacks cement. Pulled 6 jts. 7" casing, pumped 50 sacks cement. Pulled 9 jts. 7" casing and pumped 50 sacks cement. Pulled 2 jts. 7" casing.

RECEIVED
STATE CORPORATION COMMISSION
NOV 11 1974
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Rockhold Engineering, Inc.
Address P. O. Box 698, Great Bend, Kansas 67530

STATE OF Kansas, COUNTY OF Barton, ss.
James W. Rockhold (employee of owner) or (XXXXXXXXXXXX) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained, and the log of the above-described well as filed and that the same are true and correct. So help me God.

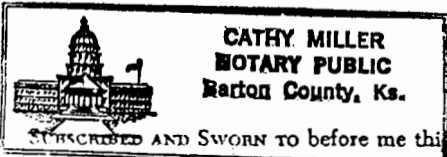

(Signature) James W. Rockhold
Box 698, Gt. Bend, Ks. 67530 James W. Rockhold
(Address)
8th day of November, 1974
Cathy Miller
Cathy Miller Notary Public.

My commission expires September 30, 1975