Telephone
(316) 793-6347

Mobil — (316) 793-7859
Unit 7076

EAGLE TESTERS

P. O. Box 1424
GREAT BEND, KANSAS 67530

Company F & B INVESTMENTS Date 10-4-80

Address BOX 336 RUSSELL, KANSAS 67665

Drilling Contractor REVLIN DRILLING, INC. Rig No. 1

Lease, Well No. # 2 CARTER County RUSSELL Sec. 8 Twp. 14 Rng. 13

Size Hole 7 7/8 Size Pipe 4½ F.H. Size Tool 3½ F.H.

Size Packer 6 3/4 x 2 7/8 x 30 Size Choke 5/8 Size Anchor 4½ F.H.

Interval Tested 2395 to 2450 Total Depth 2450

Test No. 1 Successful No. 1 Misrun No. 0

Formation Tested TARKIO Time Packer Set 3:05 P.M. Time Tool Opened 3:10 P.M.

Tool Open 15-60 Min. Initial Shut-in-Time 45 Min. Final Shut-in-Time 45 Min.

Blow GOOD BLOW ON FIRST OPENING.

GOOD BLOW ON SECOND OPENING.

Recovery 486 FEET OF MUDDY WATER.

Remarks: TEMPERATURE 104 DEGREES.

Initial BHP 911 # IFP 173 # - 193 # FFP 203 # - 264 # Final BHP 488 #

Hydrastatic Press. Mud Wt. 9.6 Vis. 49 Water Loss 14.4 cc

Extra Equipment Jars Straddle Packer Safety Joint

Tester TOM BRANAN Approved By BERNIE ERBERT Ticket No. 208
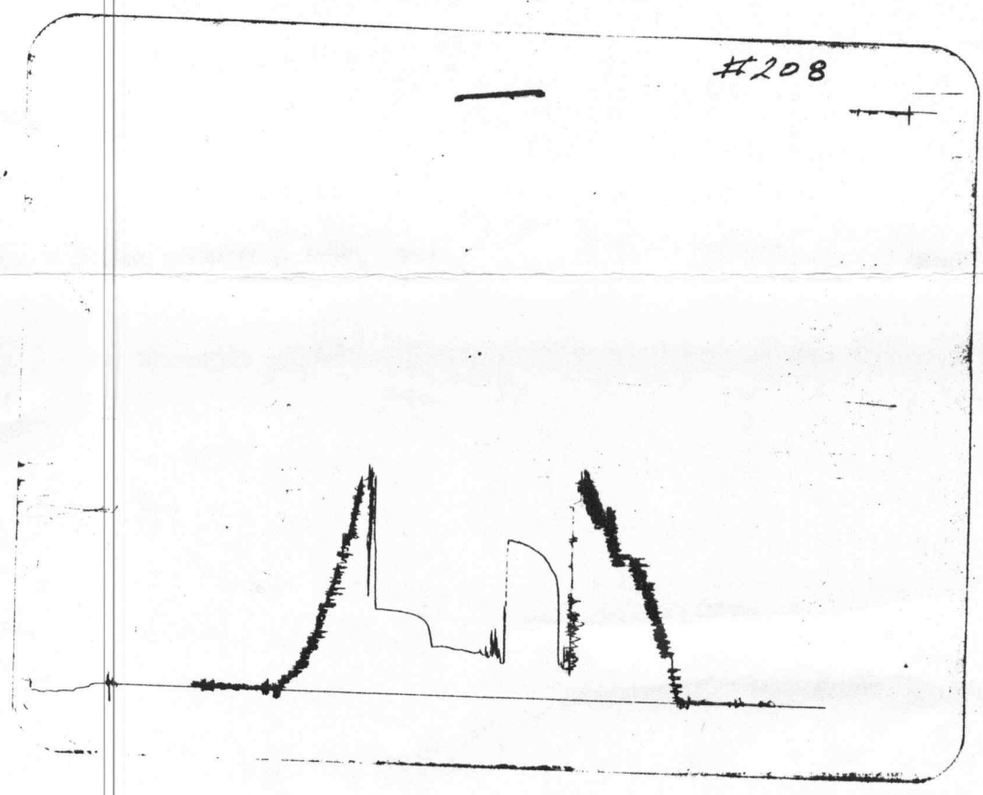
#208