

15-167-20816

✓

State Geological Survey
WICHITA, BRANCH

CONTRACTOR'S WELL LOG

27-15-11W

OPERATOR: Wilson Exploration & Development, Inc.
 CONTRACTOR: Abercrombie Drilling, Inc.
 WELL NAME: SWART #1
 LOCATION: NW NW NE Section 27-15S-11W
 Russell County, Kansas
 SPUD DATE: December 9, 1975
 COMPLETION DATE: December 16, 1975

0	55	Rock
55	70	Shale & Sand
70	195	Sand
195	256	Shale
256	460	Shale & Sand
460	725	Shale
725	745	Anhydrite
745	1370	Shale
1370	2705	Lime & Shale
2705	3365	Lime
	3365	Rotary Total Depth

Drilled 254' of 12 $\frac{1}{4}$ " hole. Set 7 jts. of 8 5/8" casing @ 253' K.B. with 140 sx. Quick-Set Cement. Cement circulated. Plug was down @ 10:15 p.m. December 9, 1975.
 Plugged and Abandoned: 1st Plug was set @ 500' with 40 sx. cement; 2nd Plug was set @ 240' with 25 sx. cement; 3rd Plug was set @ 40' with 10 sx. cement; Rat hole 2 sx. cement. State Plugger: Rankin Plug was down @ 1:15 p.m. December 16, 1975.

SAMPLE TOPS:

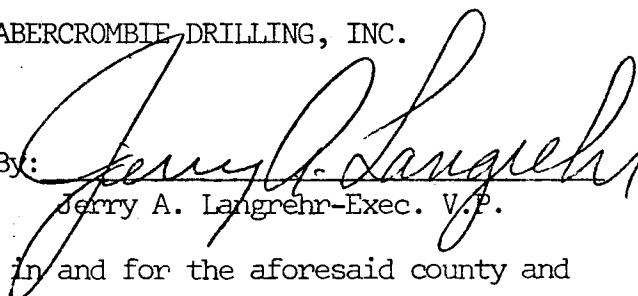
Anhydrite 725
 B/Anhydrite 745

STATE OF KANSAS)
) SS
 COUNTY OF SEDGWICK)

Jerry A. Langrehr, Executive Vice President of Abercrombie Drilling, Inc., does hereby state that the above and foregoing is a true and correct copy of the log of the SWART #1 NW NW NE Section 27-15S-11W, Russell County, Kansas.

ABERCROMBIE DRILLING, INC.

By:


 Jerry A. Langrehr-Exec. V.P.

Subscribed and sworn to before me, a Notary Public, in and for the aforesaid county and state as of this 19th day of December, 1975.

