29-16-11W

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

Company. GULF OIL CORPORATION
Farm-Joseph No. 8

SEC. 29 T. 16 R. 11W
C W/2 W /2 SW

Total Depth. 3331
Comm. 12-7-52 Comp. 12-27-52
Shot or Treated.
Contractor.
Issued. 2-28-53

County Barton
KANSAS



Elevation. 1909

Production Pot. 186 bbls.

CASING:
8 5/8 746' w/ 350 sx cement
6 in. 3329' w/ 125 sx cement

Figures indicate Bottom of Formations.

clay & part rock	70
shale & shells	210
shale	370
shale & shells	743
anhydrite	778
shale & shells	1470
lime	1685
lime & shale	1995
shale	2080
shale & shells	2165
shale	2525
shale & lime	2645
lime	2960
lime & shale	3000
Douglas shale	3042
lime	3320
conglomerate	3327
Arbuckle	3331
Total Depth	

TOPS:

Anhydrite	743
Douglas sand	2986
Brown lime	3043
Lansing	3059
Arbuckle sand	3327

WELL RECORD
GULF T 879-A

29-16-11W

Return to
Exploi...
Depar...
File R...

LL NO. 8 LEASE Joseph COMPANY Gulf Oil Corporation A.F.E. 3037

DATE—DRILLING BEGAN 12- 7-52 WELL COMPLETED 12-27-52 FIRST PRODUCTION 12-26-52

SAND RECORD Arbuckle 3327' TOTAL DEPTH 3331'

INITIAL PRODUCTION Pot. 186 Barrels Based on 8 hr. State Physical Test.

CASING RECORD

SIZE	WEIGHT	THD.	CLASS	MAKE	SET AT DEPTH	SACKS CEMENT	LBS. CAL. CHLO.	PULLED	LEFT IN
8-5/8"	32	10V	*	Smls.	746'	350			746'
6"	15	10V	**	Smls.	3329'	125			3329'
From top of K.B. to top of collar on 6" csg. is 11'									

*12 Jts. Cl.C-1
14 Jts. Cl.B

**15Jts. Cl.C-1
93Jts. Cl.B

S— 29 T— 16S R— 11W

Center
W/2
W/2
SW

Barton
County
Kansas

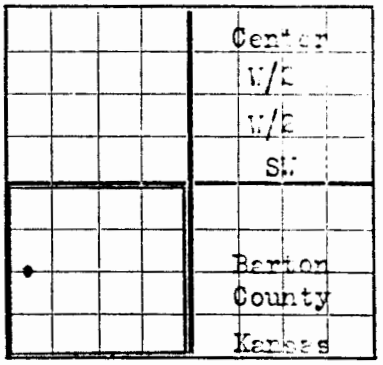

ELEVATION— 1909'

- - - - -

RECONDITION-FRACTURE ARBUCKLE: 6-8-55 6-9-55 AFE: 6148
DESC. OF WORK: Fractured w/1500 gallons oil containing 150# Adomite & 1500# sand
RESULTS: Before: "P" 6 bopd, 14 bwpd
After: "P" 45 bopd, 35 bwpd

- - - - - - - - - -

RECONDITION-FRACTURE: 1-16-56 AFE 6279
DESC. OF WORK: HOWCO packer 3315'. TD 3331'. Fractured w/4000 gallons oil, 4000# sand.
RESULTS: Before: 'P' 10 BO, 26 BW per day.
After: 'P' 11.44 BO, 30 BW in 6 hours. 24 hr rate: 'P' 46 BO, 120 BW

- - - - - - - - - - - - -

APR 22 1985
State Geological Survey
WICHITA BRANCH

RECEIVED
STATE CORPORATION COMMISSION
APR 18 1985
CONSERVATION DIVISION
Wichita, Kansas