


WELL LOG BUREAU---KANSAS GEOLOGICAL SOCIETY
412 Union National Bk. Bldg., Wichita, Kansas

Company - SOHIO PETRO. CO.
Farm - Clara Horojci "A" No. 1

SEC. 12 T. 16 R. 11 W
NWc NW

Total Depth. 3362'
Comm. 2-28-47 Comp. 4-8-47
Shot or Treated.
Contractor.
Issued. 6-28-47

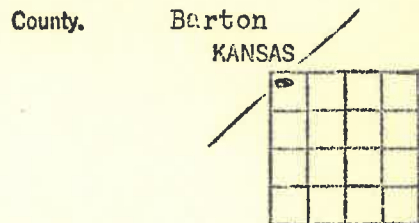

Elevation. _____

Production. Dry

CASING:

8" 367'
5" 3340'

Figures Indicate Bottom of Formations.

rock & shale 0-40
shale & sand 65
sand 85
shale & surface clay 220
shale & shells 290
shale & sand 340
shale & red bed 350
shale & shells 370
shale 455
shale & shells 600
red bed & shale 680
lime 725
shale & lime shells 965
shale & shells 1075
salt 1250
shale & shells 1410
lime & shale 1570
lime sdy 1590
lime & shale 1855
lime 2075
shale & lime shells 2085
lime & shale 2160
shale & lime shells 2255
shale 2390
shale & shells 2640
shale & cherty lime 2685
lime 2890
lime & shale 2945
shale & shells 2990
shale 3013
lime 3295
lime & shale 3342
lime 3348
T. D. w/Rotary
lime & shale 3358
lime 3362
Total Depth.

plug & now squeeze acid. &
com. 3357-. 1000 A. 3353-56'
Swbd 1 3/4 BO & 12 1/4 BWPB 20 hrs.
Dry & Abandoned.

Tops:
Lansing 3010
Conglomerate 3327
Arbuckle 3340

Shows:

DP to TD of 3346' SSO. 500 A.
Swab 2 GOPH 3 hr. DD 3358'
Bail 1 1/2 BOPB, 10 hrs., 500 A.
no help - DD 3362' N. S. TD.
3000 A. - Bail 3/4 BOPB, 10 hrs.
Pl @ 3153 - Perf. 12 3/4 3096-3100'
Swab down & had 4 1/2 BO. Bail 1 BWPB
- 10 hrs., no oil. Pl @ 3088'.
Perf. 24 3/4 3039-46'. SO, 1000 A.
Swab 2 1/2 BOPB, 4 hrs., no wtr. Fl.
decrease & W. inc. Bail 18 BO &
12 BW in 18 hrs. 3000 A. Bail 1 BO &
1 BW 16 hrs. Test Sq perf. 3039-46' -
Knocked out plug 1000 A. in Perf.
3096-3100' test. Sw 2 BW & 2 BOPB. 90 hrs.
Sq. perfs. drill out