

WICHITA BRANCH

15-071-20148
24-17-40W

GABBERT-JONES, INC.
WICHITA, KANSAS
DRILLERS' WELL LOG

Wear C-1
SE/4 Sec 24-17S-40W
Greeley County Kansas

Commenced: 12-15-77

Completed: 12-22-77

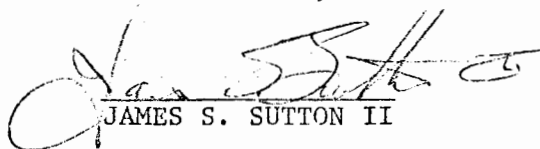
OPERATOR: DORCHESTER EXPLORATION INC.

Depth		Formation	Remarks
From	to		
0	305	Redbed	Ran 7 jts of 24# 8 5/8" csg set @ 301' Cemented w/ 235 sks Common 1/4# Flocele 3% CC PD @ 2:00 p.m. 12-15-77
305	770	Redbed-Shale	
770	1412	Shale	
1412	1515	Sand-Shale	
1515	2234	Shale-Lime	
2234	2504	Sand-Shale-w/Lime	Ran 74 jts of 10 1/2# 4 1/2" csg set @ 3078' Cemented w/150 sks 50/50 Posmix 18% Salt 3/4% CFR-2 PD @ 12:15 a.m. 12-22-77
2504	3030	Shale-Lime	
3030	3080	Lime	
	3080 - TD		


STATE OF KANSAS)
) SS
COUNTY OF SEDGWICK)

I, the undersigned, being duly sworn on oath, state that the above
Drillers' Well Log is true and correct to the best of my knowledge and belief and
according to the records of this office.

GABBERT-JONES, INC.


JAMES S. SUTTON II

Subscribed and sworn to before me this 11th day of January, 1978.


ELIZABETH J. EDWARDS-NOTARY PUBLIC

My Commission expires February 6, 1979.