15-159-22416

TRILOBITE TESTING, INC.

ORIGINAL

DRILL STEM TEST REPORT

Prepared For: **American Warrior Inc**

P O Box 399
Garden City Ks 67846

CONFIDENTIAL

ATTN: Cecil O'Brate

6-18s-10w Rice Ks

Alice "A"#2

Start Date: 2004.02.27 @ 22:21:20
End Date: 2004.02.28 @ 04:53:19
Job Ticket #: 19835 DST #: 1

RECEIVED
JUN 04 2004
KCC WICHITA

KCC
JUN 03 2004
CONFIDENTIAL

American Warrior Inc
Alice "A"#2
6-18s-10w Rice Ks
DST # 1
LKC "G"
2004.02.27

Trilobite Testing, Inc
PO Box 362 Hays, KS 67601
ph: 785-625-4778 fax: 785-625-5620

DRILL STEM TEST REPORT

American Warrior Inc

P O Box 399
Garden City Ks 67846

ATTN: Cecil O'Brate

Alice "A"#2

6-18s-10w Rice Ks

Job Ticket: 19835 **DST#: 1**

Test Start: 2004.02.27 @ 22:21:20

GENERAL INFORMATION:

Formation: **LKC "G"**
Deviated: No Whipstock: ft (KB)
Time Tool Opened: 00:14:19
Time Test Ended: 04:53:19

Test Type: Conventional Bottom Hole
Tester: Ray Schwager
Unit No: 28

Interval: 3019.00 ft (KB) To 3045.00 ft (KB) (TVD)
Total Depth: 3045.00 ft (KB) (TVD)
Hole Diameter: 6.75 inches Hole Condition: Poor

Reference Elevations: 1785.00 ft (KB)
1776.00 ft (CF)
KB to GR/CF: 9.00 ft

RECEIVED
JUN 0 4 2004
KCC WICHITA


ORIGINAL

Serial #: 6668 **Inside**

Press@RunDepth: 122.18 psig @ 3020.01 ft (KB)
Start Date: 2004.02.27 End Date: 2004.02.28
Start Time: 22:21:20 End Time: 04:53:19

Capacity: 7000.00 psig
Last Calib.: 2004.02.28
Time On Btm: 2004.02.28 @ 00:09:49
Time Off Btm: 2004.02.28 @ 02:53:49

TEST COMMENT: IFP-strg bl thru-out ISIP-GTS in 5 min
FFP-strg bl GTS , to w k to gauge
Times 30-45-30-45
slid tool 6' to bottom

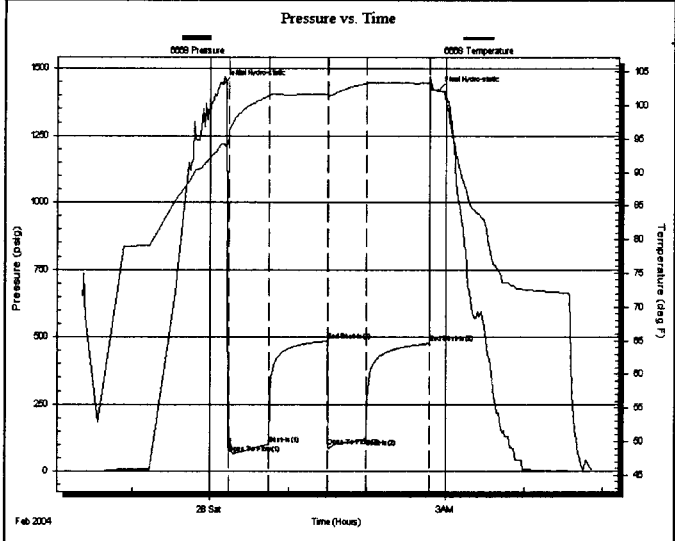

PRESSURE SUMMARY

Time (Min.)	Pressure (psig)	Temp (deg F)	Annotation
0	1441.26	94.15	Initial Hydro-static
5	67.05	95.31	Open To Flow (1)
35	101.54	101.37	Shut-In(1)
80	484.85	101.64	End Shut-In(1)
80	92.13	101.47	Open To Flow (2)
109	122.18	103.22	Shut-In(2)
158	475.97	103.32	End Shut-In(2)
164	1418.22	102.11	Final Hydro-static

Recovery

Length (ft)	Description	Volume (bbl)
30.00	SO&GCM 1%oil10%gas89%mud	0.15
60.00	GOCM 44%gas10%oil6%w ater40%mud	0.84
60.00	GO&MCW 50%gas15%oil25%w ater10%m	0.84
120.00	SO&GCW 9%gas 1%oil 90%w ater	1.68

Gas Rates

	Choke (inches)	Pressure (psig)	Gas Rate (Mcf/d)

TRILOBITE TESTING, INC.

DRILL STEM TEST REPORT

TOOL DIAGRAM

American Warrior Inc

P O Box 399
Garden City Ks 67846

ATTN: Cecil O'Brate

Alice "A"#2

6-18s-10w Rice Ks

Job Ticket: 19835 **DST#: 1**

Test Start: 2004.02.27 @ 22:21:20

Tool Information

Drill Pipe:	Length:	2978.00 ft	Diameter:	3.80 inches	Volume:	41.77 bbl	Tool Weight:		2200.00 lb
Heavy Wt. Pipe:	Length:	0.00 ft	Diameter:	0.00 inches	Volume:	0.00 bbl	Weight set on Packer:		25000.00 lb
Drill Collar:	Length:	30.00 ft	Diameter:	2.25 inches	Volume:	0.15 bbl	Weight to Pull Loose:		60000.00 lb
					Total Volume:	41.92 bbl	Tool Chased		6.00 ft
Drill Pipe Above KB:		10.00 ft					String Weight:	Initial	35000.00 lb
Depth to Top Packer:		3019.00 ft						Final	37000.00 lb
Depth to Bottom Packer:		ft							
Interval betw een Packers:		26.02 ft							
Tool Length:		47.02 ft							
Number of Packers:		2	Diameter:	6.75 inches					

Tool Comments:

Tool Description	Length (ft)	Serial No.	Position	Depth (ft)	Accum. Lengths	
Change Over Sub	1.00			2999.00		
Shut In Tool	5.00			3004.00		
Hydraulic tool	5.00			3009.00		
Packer	5.00			3014.00	21.00	Bottom Of Top Packer
Packer	5.00			3019.00		
Stubb	1.00			3020.00		
Recorder	0.01	6668	Inside	3020.01		
Perforations	22.00			3042.01		
Recorder	0.01	11085	Outside	3042.02		
Bullnose	3.00			3045.02	26.02	Bottom Packers & Anchor
Total Tool Length:	**47.02**					

RECEIVED
JUN 04 2004
KCC WICHITA

TRILOBITE TESTING, INC.

DRILL STEM TEST REPORT

FLUID SUMMARY

American Warrior Inc

P O Box 399
Garden City Ks 67846

ATTN: Cecil O'Brate

Alice "A"#2

6-18s-10w Rice Ks

Job Ticket: 19835 **DST#: 1**

Test Start: 2004.02.27 @ 22:21:20

Mud and Cushion Information

Mud Type:	Gel Chem	Cushion Type:		Oil API:	deg API
Mud Weight:	9.00 lb/gal	Cushion Length:	ft	Water Salinity:	19000 ppm
Viscosity:	50.00 sec/qt	Cushion Volume:	bbl		
Water Loss:	8.95 in³	Gas Cushion Type:			
Resistivity:	ohm.m	Gas Cushion Pressure:	psig		
Salinity:	3000.00 ppm				
Filter Cake:	1.00 inches				

Recovery Information

Recovery Table

Length ft	Description	Volume bbl
30.00	SO&GCM 1%oil10%gas89%mud	0.148
60.00	GOCM 44%gas10%oil6%w ater40%mud	0.842
60.00	GO&MCW 50%gas15%oil25%w ater10%mud	0.842
120.00	SO&GCW 9%gas 1%oil 90%w ater	1.683

Total Length: 270.00 ft Total Volume: 3.515 bbl

Num Fluid Samples: 0 Num Gas Bombs: 0 Serial #:


Laboratory Name: Laboratory Location:

Recovery Comments: RW.55@48

RECEIVED
JUN 04 2004
KCC WICHITA

Alice "A" #2

Serial #: 6668 **Inside** American Warrior Inc 6-18s-10w Rice Ks DST Test Number: 1

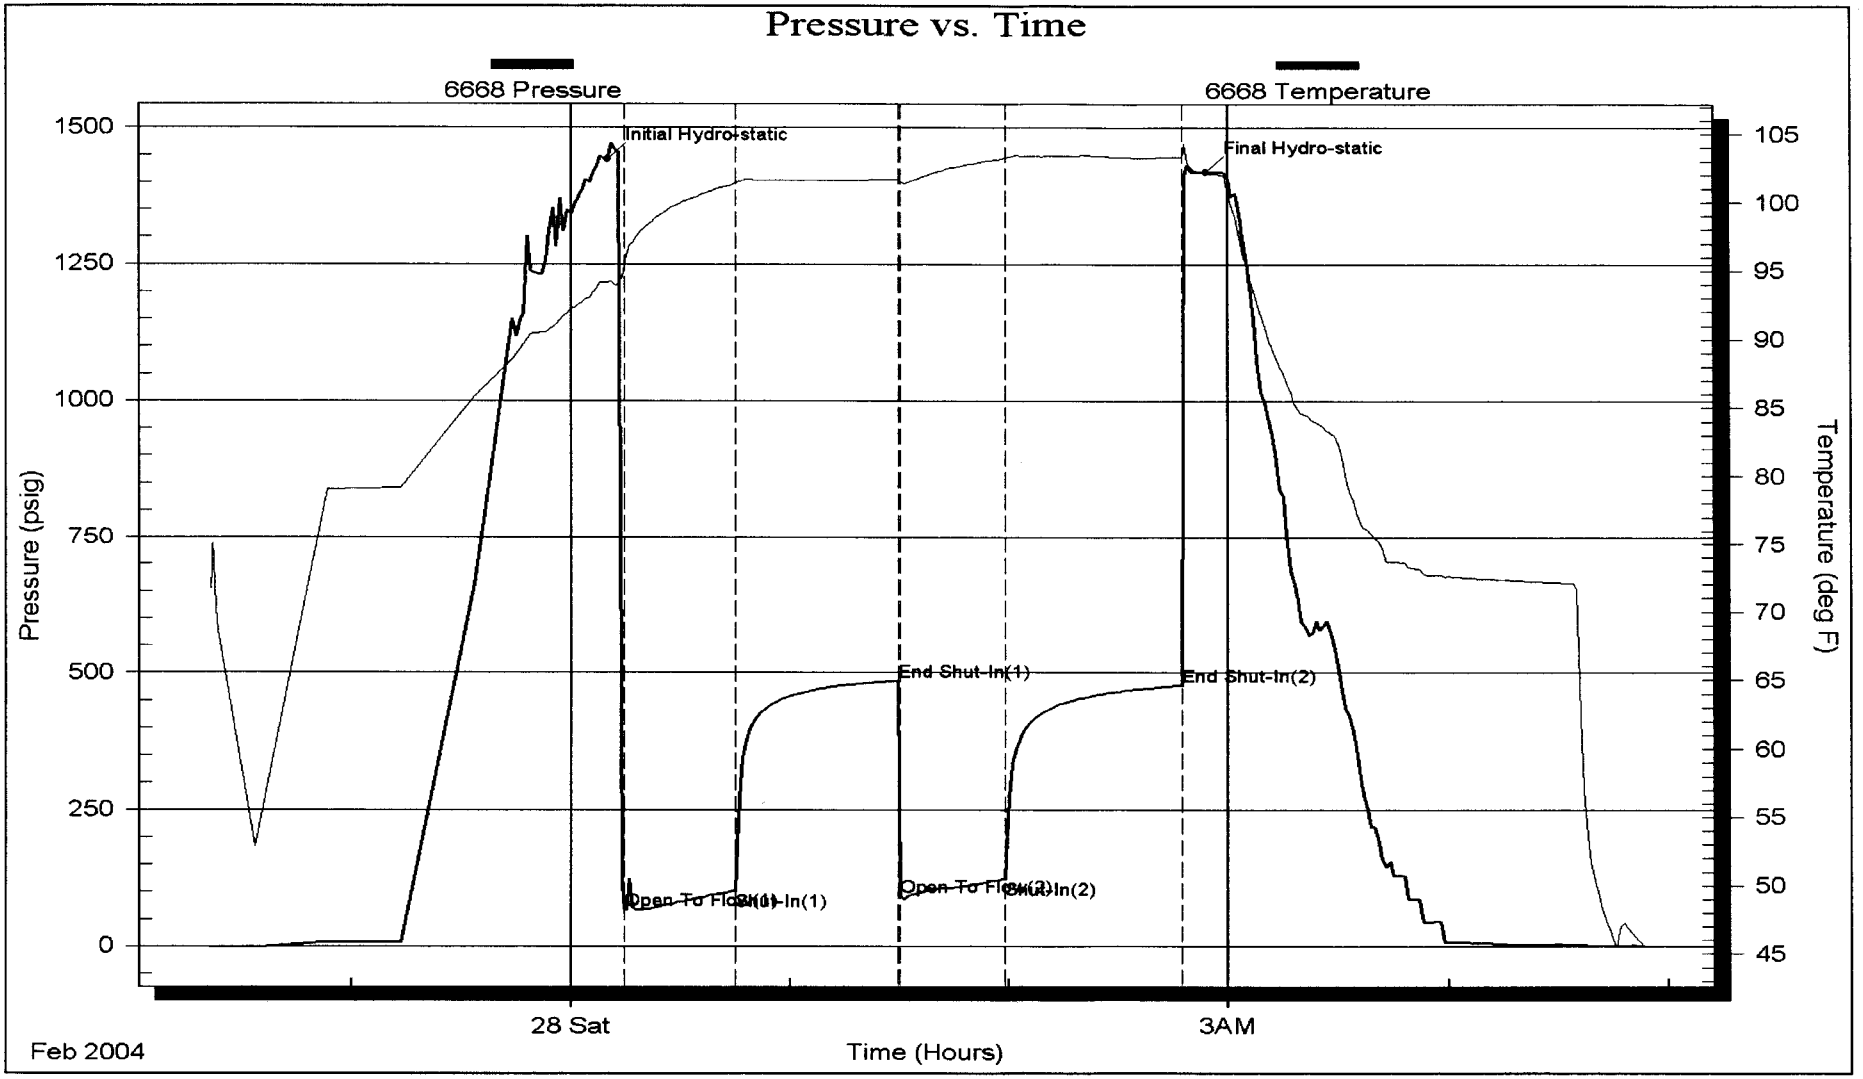

RECEIVED
JUN 0 4 2004
KCC WICHITA