PALOMINO PETROLEUM
P.O. BOX 18610
WICHITA, KANSAS 67218

R. W. WATCHOUS
OWNER - GEOLOGIST

(316) 683-8152

Progress Report

Palomino Petroleum #8 Reed
NE SE SE Section 4-18-25W Ness County, Kansas
Elev: 2363 K.B. API # 15-135-22,892

8-6-85 Moving in rotary tools. Spudded. Set 6 jts new 8 5/8" 20# surface pipe @ 257', cemented w/ 200 sacks 60-40 Pozmix, 2% gel, 3% CC. Plug down @ 5:45 P.M. Cement did circ. Straight hole test = 1/2 of 1°.


8-7-85 Drlg @ 780'

8-8-85 Drlg @ 2480'
Straight hole test @ 1625 = 3/4 of 1°.

8-9-85 Drlg @ 3275'

8-11-85 DST #1: 4195-4310, open 30 min, weak blow to dead in 10 min. Rec. 10' mud. FP 79-79; 20 min. SIP 227. No E-log taken
D & A

	Corrected
Anhy. ~~1612~~ 1622 (~~+751~~ +741)	to 1643
Heeb.	3655± (-1292)
Lans	3695± (-1332)
F. S.	4206 (-1843)
Miss	4302 (-1939)
RTD	4310 (-1947)

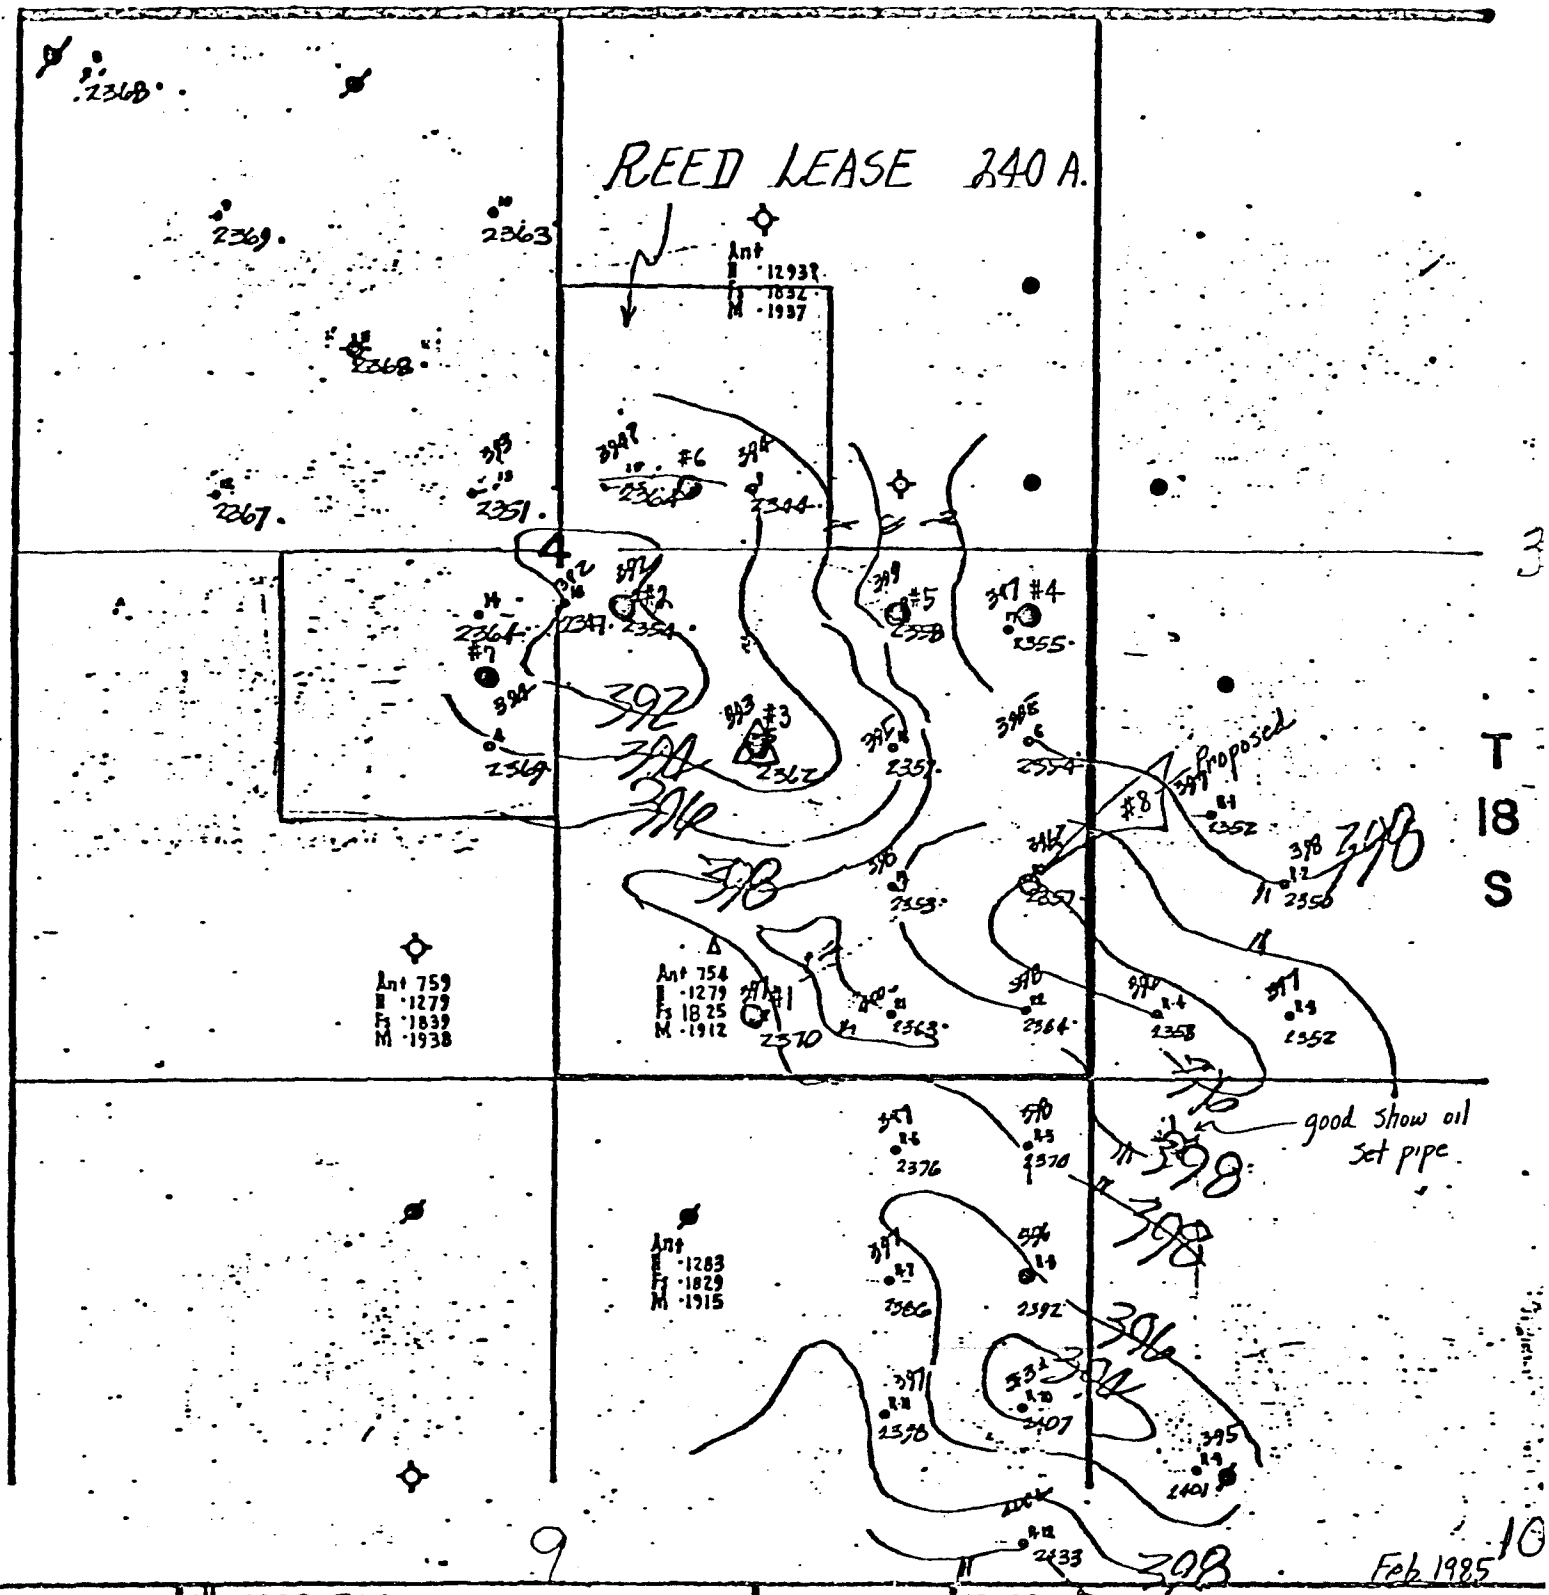

SCALE	1" = 1000 Feet	AREA	18-25-9
DATUM PLANE		LOCATION	NESS COUNTY, KANSAS
V_w	2000 ft/s	FOR	PALOMINO PETROLEUM
V_{sw}	7000 ft/s		SURFACE ELEVATIONS
CONTRACT NUMBER	133-2	CONTOURED ON	.002 Sec. AN-LOWER PENN
Map No. 4 of 5 Maps	MAP SUBJECT TO REPORT QUALIFICATIONS	INTERVAL	

MAR 10 1978

GEOSEARCH, INC.
Wichita, Kansas