

31-19-1W

KANSAS GEOLOGICAL SOCIETY
KANSAS WELL LOG BUREAU - KANSAS WELL SAMPLE BUREAU
KANSAS GEOLOGICAL SOCIETY BUILDING
508 EAST MURDOCK - WICHITA, KANSAS

COMPANY GEORGE R. HESS

SEC. 31 T. 19 N. 1W
LOC. SE SE SE

FARM Tinsley

NO. 1

COUNTY McPherson

TOTAL DEPTH 2987


COMM. 1-18-67

COMP. 1-24-67

SHOT OR TREATED

CONTRACTOR Blackstone Drlg.

ISSUED 4-8-67



CASING

20	10	
15	8 5/8"	@ 142' w/90 SX
12	6	
13	5 1/2"	@ 2980' w/40 SX

ELEVATION 1571' KB

PRODUCTION DRY (MISS)

FIGURES INDICATE BOTTOM OF FORMATIONS

0	to	30	Clay
30	to	90	Sand
90	to	142	Shale
142	to	490	Shale & Lime
90	to	1085	Lime & Shale
085	to	2010	Shale & Lime
2010	to	2950	Lime
2560	to	2987	Mississippi
		2987	T. D.

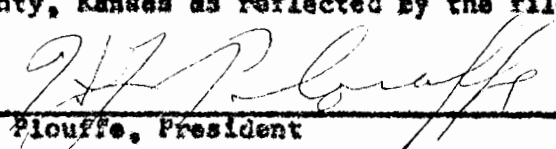
Cut 12 1/4 in. hole to 142 ft. and run 144 ft. of 8 5/8 in. surface pipe and cemented with 90 sacks cement on bottom at 142 ft. Plug down at 12:30 P.M., January 18, 1967.
at 7 7/8 in. hole to 2980 ft. and run 2995 ft. of 5 1/2 in. casing. Set at 2980 ft., foot off bottom and cemented with 40 sacks cement. Plug down at 2:15 A.M., January 24, 1967.

TOPS: Kansas City - 2390' Mississippi - 2940'


Measurements taken from K. D.

CERTIFICATE

I, H. J. Plouffe, President of Blackstone Drilling, Inc. do hereby certify that the above and foregoing is a true and correct copy of log on your Tinsley #1, located on the SE/4 SE/4 SE/4 of Sec. 31-19-1W, McPherson County, Kansas as reflected by the files of BLACKSTONE DRILLING, INC.


H. J. Plouffe, President

Subscribed and sworn to before me a Notary Public in and for McPherson County, Kansas this 24th day of January, 1967.


Ruth McVay - Notary Public