

State Geological Survey
WICHITA BRANCH

KANSAS DRILLERS LOG

S. 32 T. 19S R. 1W ^E/_W

Loc. C SW/4

County McPherson

API No. 15 — 113 — 20,590
County Number

Operator
Bass Enterprises Production Company

Address
209 E. William, Suite 930 Wichita, Kansas


Well No. 1 Lease Name Jackson

Footage Location
1320 feet from (N) (S) line 1320 feet from (E) (W) line

Principal Contractor Brandt Drilling Co., Inc. Geologist Jerry Jespersion

Spud Date 12-15-78 Total Depth 3060 P.B.T.D.

Date Completed 12-23-78 Oil Purchaser



Locate well correctly
Elev.: Gr. 1571

DF 1573 KB 1575

CASING RECORD

Report of all strings set—surface, intermediate, production, etc.

Purpose of string	Size hole drilled	Size casing set (in O.D.)	Weight lbs/ft.	Setting depth	Type cement	Sacks	Type and percent additives
Surface	12 1/4"	8 5/8"		202	common	175	3% CaCl 2% Gel

LINER RECORD

PERFORATION RECORD

Top, ft.	Bottom, ft.	Sacks cement	Shots per ft.	Size & type	Depth interval

TUBING RECORD

Size	Setting depth	Packer set at

ACID, FRACTURE, SHOT, CEMENT SQUEEZE RECORD

Amount and kind of material used	Depth interval treated

INITIAL PRODUCTION

Date of first production <u>P&A 12/24/78</u>		Producing method (flowing, pumping, gas lift, etc.)			
RATE OF PRODUCTION PER 24 HOURS	Oil bbls.	Gas MCF	Water bbls.	Gas-oil ratio	CFPB
Disposition of gas (vented, used on lease or sold)			Producing interval (s)		

INSTRUCTIONS: As provided in KCC Rule 82-2-125, within 90 days after completion of a well, one completed copy of this Drillers Log shall be transmitted to the State Geological Survey of Kansas, 4150 Monroe Street, Wichita, Kansas 67209. Copies of this form are available from the Conservation Division, State Corporation Commission, 3830 So. Meridian (P.O. Box 17027), Wichita, Kansas 66217. Phone AC 316-522-2206. If confidential custody is desired, please note Rule 82-2-125. Drillers Logs will be on open file in the Oil and Gas Division, State Geological Survey of Kansas, Lawrence, Kansas 66044.

Operator

Bass Enterprises Production Company

DESIGNATE TYPE OF COMP.: OIL, GAS,
DRY HOLE, SWDW, ETC.:
dry hole

Well No.

1

Lease Name

Jackson

S 32 T 19S R 1W E
W

McPherson County, Kansas

WELL LOG


Show all important zones of porosity and contents thereof; cored intervals, and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures, and recoveries.

SHOW GEOLOGICAL MARKERS, LOGS RUN, OR OTHER DESCRIPTIVE INFORMATION.

FORMATION DESCRIPTION, CONTENTS, ETC.	TOP	BOTTOM	NAME	DEPTH
Surface Soil & clay	0	32		
Sand	32	41		
Shale	41	365		
Lime	365	429		
Shale w/lime stks.	429	603		
Lime & sandy lime	603	736		
Shale & lime	736	1298		
Shale & sand	1298	1744		
Lime, chalky	1744	1889		
Shale, black	1889	1919		
Lime, chalky & xln	1919	2058		
Shale, black	2058	2064		
Lime, dense	2064	2089		
Sand & sandy shale	2089	2149		
Sand, mica.	2149	2269		
Shale	2269	2310		
Lime, xln & fossil.	2310	2686		
Lime, dense w/shale stks.	2686	2815		
Shale	2815	2818		
Conglomerate	2818	2903		
Lime & cherty lime	2903	3060		
RTD	3060			

USE ADDITIONAL SHEETS, IF NECESSARY, TO COMPLETE WELL RECORD.

Date Received

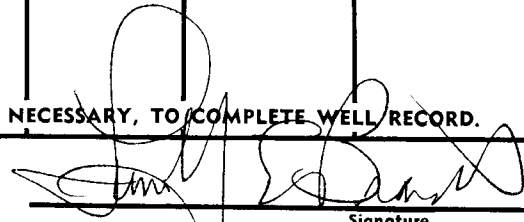

Signature

General Manager

Title

December 26, 1978

Date