
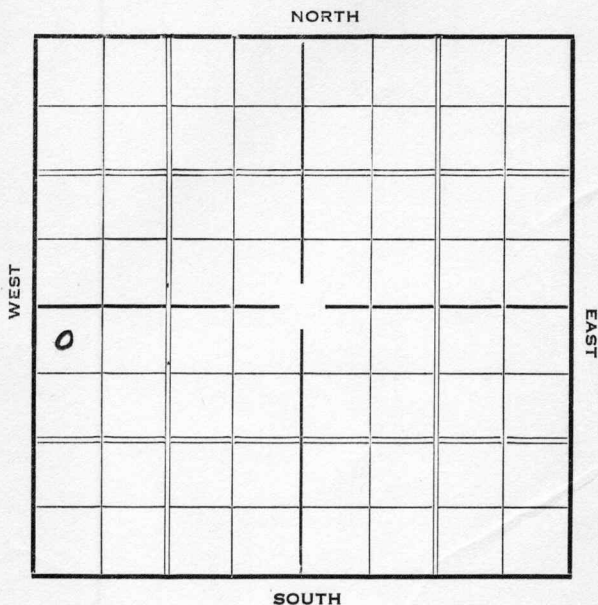


Section 36 Township 19 Range 11-WWell Number #7 Carl SchmidtCompany Mid-Continent Petroleum Corp.

S. 36 Twp. 19 R. 11-WWell No. #7 Carl Schmidt FarmMid-Continent Petrol Company330 Ft. from N. Line Ft. from S. Line Ft. from E. Line330 Ft. from W. Line

Elev. 1765



Date	REPORT
1937	
10/13	Location
10/19	Rig up (Tel)
10/22	R. U. R.
10/29	12" @ 211'. Drlg. 1350'.
11/2	Dlg. 2990 (Tel)
11/4	Cored 3282-92 Small show oil
	Top Siliceous 3289 T.D. 3292
	Will run 7" to top Siliceous at
	3289 (Tel)
	Running 5 feet lower on top Siliceous
	than Stanolind #3 Burmeister SE NE
	35-19-11W (Diagonal northwest offset)
	which was completed for 1008 bbls.
11/12	" " Waiting on 7".
11/13	Start bailing this evening (Tel)
11/15	Dlg. cement (Tel)
11/16	Dlg. cement today (Tel)
11/17	T.D. 3296 in hard cherty lime
	120 feet oil in hole Shut down for
	repairs Will start drilling today(Tel)

OVER

11/18--Top Siliceous 3289
 At 3301 had 350 feet oil in hole
 T.D. 3303 Engine broke down
 Formation hard (Tel)

11/20--T.D. 3309 1500 feet oil in hole
 (Gradual fill up)
 Cleaning out and will swab until Monday
 then acidize (Tel)

11/22--Swab 1 bbl. oil per hour off bottom
 Will acidize with 500 gallons thru
 casing (Tel)

11/22--Acidized 500 gallons (Tel)

11/23--No help after acidizing with 500 gallons
 Will reacidize with 1000 gallons (Tel)

11/26--Shot 20 qts. Cleaning out (Tel)

11/27--2000 feet fluid in hole
 Will swab (Tel)

11/29--Swabbing $2\frac{1}{2}$ bbls. oil & $2\frac{1}{2}$ bbls. water
 per hour (Tel)

12/1--Swabbing and cleaning out Making 3 bbls
 oil and 2 bbls. water per hour (Tel)

12/4--Swabbing 4 bbls. oil and 1 bbl. water
 per hour Reacidize 2000 gallons (Tel)

12/7--Will take potential today (Tel)

12/7--Pumped 111 bbls. 1st 4 hours
 " 64 " 2nd 4 "
 24 hour potential 385 bbls.
 Making some water (Tel)

OVER

1937

12/8 12" @ 211'.

7" @ 3289'.

Sil. 3289'.

T.D. 3309'.

500 A

1000 A

Shot 20 qts.

2000 acid.

Pump 112 bbls. 4 hrs. & 64 bbls.
4 hrs.

Potential 385 bbls.

No estimate of water.

COMPLETED

Barton

KANSAS

Map No. _____ Sec. 36 Twp. 19 R. 11WWell No. 7 Carl SchmidtMid-Continent Petrol Company

Contractor _____

FIRST REPORT

NW SW

330 Ft. from N. Line

_____ Ft. from S. Line

_____ Ft. from E. Line

330 Ft. from W. Line

SECTION PLAT

0			

Location X

Rig up _____

Drilling and Remarks:

RECORD

Cased _____ in., _____ ft.

Sand _____

Gas _____

Oil _____

Total Depth _____

PRODUCTION

1st 24 hrs. Nat. _____

1st 24 hrs. after shot _____

Gas _____ Cu. Ft.

Dry Hole _____

Abandoned _____

Date

OCT 13 1937 19H. D. Hatfield Scout

Ray

Returned

Cards

Tracing

France Map

Scarborough Map

Moody Map

Scarborough Plat Book

Moody Plat Book

Barton

KANSAS

Map No. _____ Sec. 36 Twp. 19 R. 11WWell No. 7 Carl SchmidtMid-Continent Petrol Company

Contractor _____

COMPLETED

SECTION PLAT

330 NW SW
Ft. from N. Line

____ Ft. from S. Line

____ Ft. from E. Line

330 Ft. from W. Line

•			

Location _____

Rig up _____

Drilling and Remarks:

500 A
1000 A
Shot 20 gts
2000 acid
P- 112/ 4 64/4
POT 385
no estimate of water

12" - 211

RECORD

Cased 7 in., 3289 ft.Sand 511 3289

Gas _____

Oil _____

Total Depth 3309

PRODUCTION

1st 24 hrs. Nat. _____

1st 24 hrs. after shot _____

Gas _____ Cu. Ft.

Dry Hole _____


Abandoned _____

Date

DEC 8 - 1937

19

H. D. Hatfield Scout

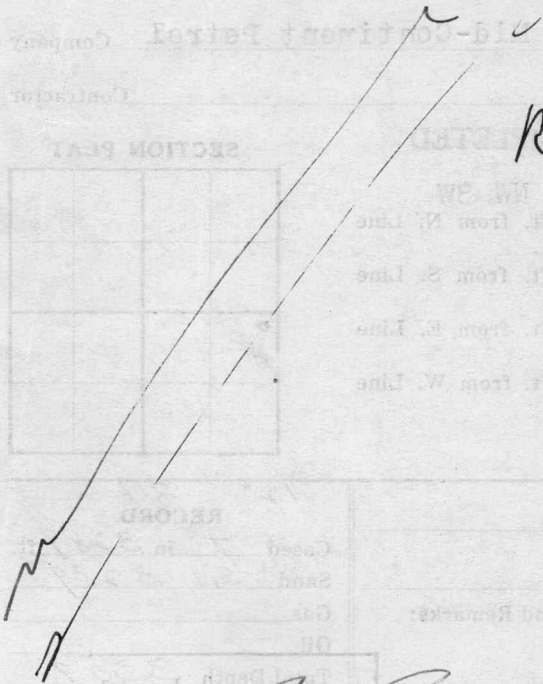

RAY

Paul
J. RAY

Scarborough Plat Book
Moody Plat Book

Date