

Job No. - 20-059
 Client Mapco - WES
 Location C.U.E. Rect #9

MESA CORROSION CONTROL

Page 1 OF 2
 Date 11/15/2000
 Prepared By AH

15-113-21283-0002

Driller C.P. Drilling
 Line/Sta. Conway Underground Storage
 County & State McPherson, KS
 Section 28 Township 19
 Depth 350' Dia. 10"
 VENT 1" All Vent Annulus Fill
 Coke Loresco SC-3
 Anodes 3884 Anotec w/#8 Exar Cable

License No.
 Rectifier ID. #9
 MP/Sta.No. C.U.E.
 Range 4W
 Casing 197'-10"
 Coke Qty. 5000#
 No. Anodes 10

Depth Feet	Drillers Log	ELECTRICAL LOG		FINAL PLACEMENT			
		Volts	Amps	Depth	No.	Water	Coke
0	0-4 Top Soil 0-197 10" PVC						
10	4-82 Red Clay						
20	Red Clay						
30	Red Clay						
40	Red Clay						
50	Red Clay						
60	Red Clay						
70	Red Clay						
80	82-124 Gray clay/Gypsum streaks						
90	Gray clay/Gypsum streaks						
100	Gray clay/Gypsum streaks						
110	Gray clay/Gypsum streaks						
120	124-350 Gray Shale						
130	Gray Shale						
140	Gray Shale						
150	Gray Shale						
160	Gray Shale						
170	Gray Shale						
180	Gray Shale						
190	Gray Shale 190-207 Bentonite						
200	Gray Shale 207' Top of Coke	13.12	7.0				
210	Gray Shale		6.7				
220	Gray Shale		6.6				
230	Gray Shale		5.6	238	10		11.6
240	Gray Shale		4.9	248	9		10.7
250	Gray Shale		5.4	258	8		9.4
260	Gray Shale		5.7	268	7		9.3
270	Gray Shale		5.2	278	6		8.8
280	Gray Shale		5.2	288	5		8.9
290	Gray Shale		5.0	298	4		9.2
300	Gray Shale		4.9	308	3		9.2

Job No. 20-059
 Client Mapco - WES
 Location C.U.E. Rect #9


MESA CORROSION CONTROL

Page 2 OF 2
 Date 11/15/2000
 Prepared By AH

Driller C.P. Drilling
 Line/Sta. Conway Underground Storage
 County & State McPherson, KS
 Section 28 Township 19
 Depth 350' Dia. 10"
 VENT 1" All Vent Annulus Fill _____
 Coke Loresco SC-3
 Anodes 3884 Anotec w/#8 Exar Cable

License No. _____
 Rectifier ID. #9
 MP/Sta.No. C.U.E.
 Range 4W
 Casing 197'-10"

 Coke Qty. 5000#
 No. Anodes 10

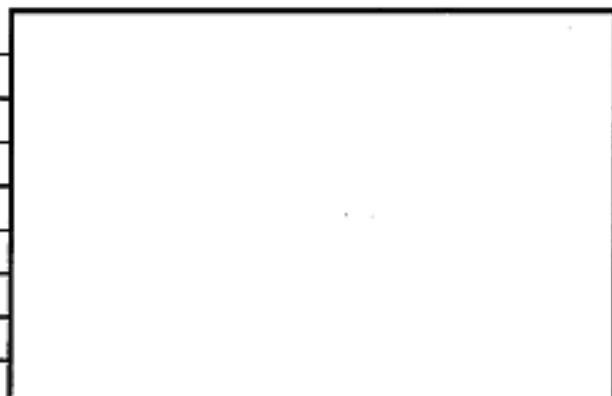

Depth Feet	Drillers Log	ELECTRICAL LOG		FINAL PLACEMENT			
		Volts	Amps	Depth	No.	Water	Coke
310	Gray Shale	13.12	5.3	318	2		9.0
320	Gray Shale		5.1	328	1		8.5
330	Gray Shale		5.6				
340	Gray Shale		5.5				
350	350' ID						
360							
370							
380							
390							
400							
410							
420							
430							
440							
450							
460							
470							
480							
490							
500							
510							
520							
530							
540							
550							
560							
570							
580							
590							
600							
610							