

STATE CORPORATION COMMISSION OF KANSAS
OIL & GAS CONSERVATION DIVISION

WELL COMPLETION OR RECOMPLETION FORM
ACO-1 WELL HISTORY

DESCRIPTION OF WELL AND LEASE

Operator: License #
Name ...Drilling Ltd. of Colorado.....
Address ...410 S. 17th St., Suite 1140.....
.....Denver, Colorado 80202.....
City/State/Zip

Purchaser.....None.....

Operator Contact Person ...Les. Olson.....
Phone ... (303) 443-1144.....

Contractor: License #
NameC. and R. Drilling Co.....

Wellsite Geologist...Michael A. Downick.....
Phone.....(303) 621-6144.....

Designate Type of Completion

☒ New Well ☐ Re-Entry ☐ Workover

☐ Oil ☐ SWD ☐ Temp Abd
☐ Gas ☐ Inj ☐ Delayed Comp.
☒ Dry ☐ Other (Core, Water Supply etc.)

If OWWO: old well info as follows:

Operator
Well Name
Comp. DateOld Total Depth.....

WELL HISTORY

Drilling Method:

☒ Mud Rotary ☐ Air Rotary ☐ Cable

.....7-17-85.....7-24-85.....7-24-85.....
.....
Spud Date Date Reached TD Completion Date
.....4333'.....Surface.....
.....
Total Depth PBTD

Amount of Surface Pipe Set and Cemented at.....371' feet
Multiple Stage Cementing Collar Used? ☐ Yes ☒ No
If yes, show depth set.....feet
If alternate 2 completion, cement circulated
from.....feet depth to.....w/.....SX cmt

API NO. 15-...135-22,865.....

County.....Hess.....

.....NW..SW..SE.. Sec..1... Twp..20..Rge..22.. ☐ East
☒ West

.....990..... Ft North from Southeast Corner of Section
.....2310..... Ft West from Southeast Corner of Section
(Note: Locate well in section plat below)


Lease Name.....Dechant.....Well #..2.....

Field Name.....Schaben.....

Producing Formation.....None.....

Elevation: Ground.....2229.....KB.....2234.....

Section Plat

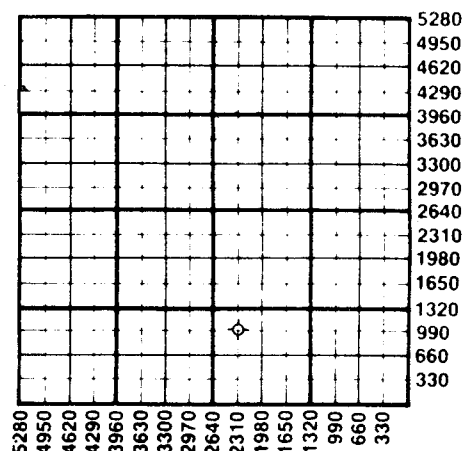

☒ WATER SUPPLY INFORMATION

Disposition of Produced Water: ☐ Disposal
Docket # ☐ Repressuring

Questions on this portion of the ACO-1 call:

Water Resources Board (913) 296-3717

Source of Water:

Division of Water Resources Permit #.....

☐ Groundwater.....Ft North from Southeast Corner
(Well)Ft West from Southeast Corner of
Sec Twp Rge ☐ East ☐ West

☒ Surface Water.....Ft North from Southeast Corner
(Stream, pond etc).....Ft West from Southeast Corner
Sec Twp Rge ☐ East ☐ West

☐ Other (explain).....
(purchased from city, R.W.D. #)

INSTRUCTIONS: This form shall be completed in duplicate and filed with the Kansas Corporation Commission, 200 Colorado Derby Building, Wichita, Kansas 67202, within 90 days after completion or recompletion of any well. Rule 82-3-130 and 82-3-107 apply.

Information on side two of this form will be held confidential for a period of 12 months if requested in writing and submitted with the form. See rule 82-3-107 for confidentiality in excess of 12 months.

One copy of all wireline logs and drillers time log shall be attached with this form. Submit CP-4 form with all plugged wells. Submit CP-111 form with all temporarily abandoned wells.

10045

Operator Name **Drilling Ltd. of Colorado** Lease Name..... **Dechant** Well #... **2**Sec..... **1** Twp..... **20** Rge..... **22** ☐ East
☒ West County..... **Ness**

WELL LOG

INSTRUCTIONS: Show important tops and base of formations penetrated. Detail all cores. Report all drill stem tests giving interval tested, time tool open and closed, flowing and shut-in pressures, whether shut-in pressure reached static level, hydrostatic pressures, bottom hole temperature, fluid recovery, and flow rates if gas to surface during test. Attach extra sheet if more space is needed. Attach copy of log.

.....

Drill Stem Tests Taken ☒ Yes ☐ No
 Samples Sent to Geological Survey ☐ Yes ☒ No
 Cores Taken ☐ Yes ☒ No

Formation Description
☒ Log ☐ Sample

Name Top Bottom

DST #1 4380' - 4401'
 30-30-45-60

IHSP 2299 FHSP 2279
 IFP 40-60 FFP 60-80
 ISIP 1271 FSIP 1271

Recovered: 120' watery mud
 30% water
 70% mud

ANHYDRITE +762
 HEEBNER -1501
 LANSING -1546
 MUNCIE CREEK -1707
 STARK -1802
 B/KANSAS CITY -1866
 PAWNEE -1979
 FORT SCOTT -2062
 CHEROKEE -2085
 MISSISSIPPIAN -2150
 OSAGE -2158
 T.D. -2159

CASING RECORD ☒ New ☐ Used

Report all strings set-conductor, surface, intermediate, production, etc.

Purpose of String	Size Hole Drilled	Size Casing Set (in O.D.)	Weight Lbs/Ft.	Setting Depth	Type of Cement	#Sacks Used	Type and Percent Additives
Surface	12-1/4	8-5/8	23	371	60-40 P&Z	230	2% Gel 3% C.C.
.....							
.....							
.....							

PERFORATION RECORD

Shots Per Foot Specify Footage of Each Interval Perforated

Acid, Fracture, Shot, Cement Squeeze Record

(Amount and Kind of Material Used)

Depth

.....						
.....						
.....						
.....						

TUBING RECORD Size Set At Packer at

Liner Run ☐ Yes ☐ No

Date of First Production Producing Method

☐ Flowing ☐ Pumping ☐ Gas Lift ☐ Other (explain).....