

DRILLING WELL COMPLETION REPORT

Well No. One (1) Farm Name P.O. Hubenett

Date completed August 13th, 1957

Description SW $\frac{1}{4}$ SW $\frac{1}{4}$ Sec. 23-20S-6W 350' from North and West Lines.

County Rice, State Kansas

Initial production 401 bbls. Total depth 3378 feet


Initial volume _____ cu. ft. _____ lbs. rock pressure

Pipe Line Company _____

Gas Company _____

Remarks: Lloyd Snyder District Superintendent. E.A. Dymond - Foreman.

MCPC interest - All Daily allowable 54.85 Bbls.



- Accounting Dept.
- Rental Dept.
- ✓ Scouting Dept.
- Engineering Dept.
- Legal Dept.
- Lease Inventory Man
- Tax Dept.
- Geological
- File

Seventy

MID-CONTINENT PETROLEUM CORPORATION
WELL RECORD

P.O. HUBENETT

1/1 I

Location: SW¹/₄ SW¹/₄ Section 23-20S-6W Rice County, Kansas, 330' from the North and West lines.

Contractors : Mac & Stauffer

Commenced 6-28-37 Completed 8-13-37 Potential: 401 Bbls.

| | | |
|------------------|------|------|
| Soil | 0 | 50 |
| Shells | 50 | 100 |
| Red bed | 100 | 160 |
| Lime and shells | 160 | 225 |
| Lime | 225 | 239 |
| Red bed | 239 | 275 |
| Shells hard lime | 275 | 410 |
| Red bed | 410 | 415 |
| Lime | 415 | 570 |
| Shale (Blue) | 570 | 775 |
| Salt | 775 | 900 |
| Lime | 900 | 1100 |
| Shale | 1100 | 1113 |
| Lime | 1113 | 1875 |
| Shale | 1875 | 2000 |
| Lime | 2000 | 2040 |
| Shale | 2040 | 2055 |
| Lime | 2055 | 2090 |
| Shale | 2090 | 2100 |
| Lime | 2100 | 2130 |
| Shale | 2130 | 2180 |
| Lime | 2180 | 2690 |
| Lime and shale | 2690 | 2728 |
| Lime | 2728 | 2780 |
| Lime broken | 2780 | 2840 |
| Lime | 2840 | 3284 |
| Shale | 3284 | 3292 |
| Lime | 3292 | 3305 |
| Shale (Red) | 3305 | 3330 |
| Chatt | 3330 | 3335 |
| Chatt | 3335 | 3345 |
| Chatt | 3345 | 3346 |
| Chatt | 3346 | 3353 |
| Chatt | 3353 | 3356 |
| Chatt | 3356 | 3365 |
| Chatt | 3365 | 3378 |

CASING RECORD


| SIZE | WEIGHT | AMOUNT | CEMENT |
|--------|--------|--------|-----------|
| 13" OD | 40# | 214' | 200 sacks |
| 7" OD | 24# | 3330' | 250 sacks |

LOCATION NOTICE

TULSA, OKLA. June 16 1937

WELL NO. One (1) ON P. O. Hubenett FARM

WILL BE AS FOLLOWS:

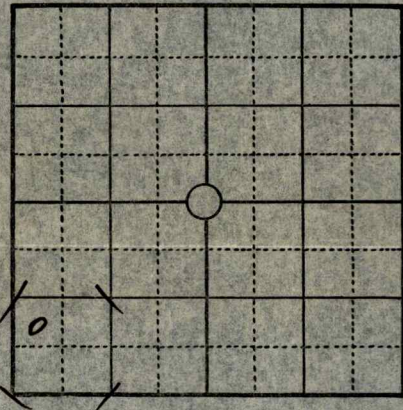

330 FEET FROM NORTH LINE
 FEET FROM EAST LINE
 FEET FROM SOUTH LINE
330 FEET FROM WEST LINE

IN SW $\frac{1}{4}$, SW $\frac{1}{4}$ SEC. 23 TWP. 20 S. RANGE 6 W.
Rice COUNTY, STATE OF Kansas

REMARKS: _____

E. A. Dymond, Foreman

COPIES TO _____ SIGNED _____

- DISTRICT SUPT.
- ACCOUNTING DEPT.
- RENTAL DEPT.
- SCOUTING DEPT. ✓
- ENGINEERING DEPT.
- LEGAL DEPT.
- CLAIM DEPT.
- TAX DEPT.
- GEOLOGICAL DEPT.
- FILE
- LEASE INVENTORY

[Handwritten signatures and scribbles]