


15

TKT # 3850
I


7 13401

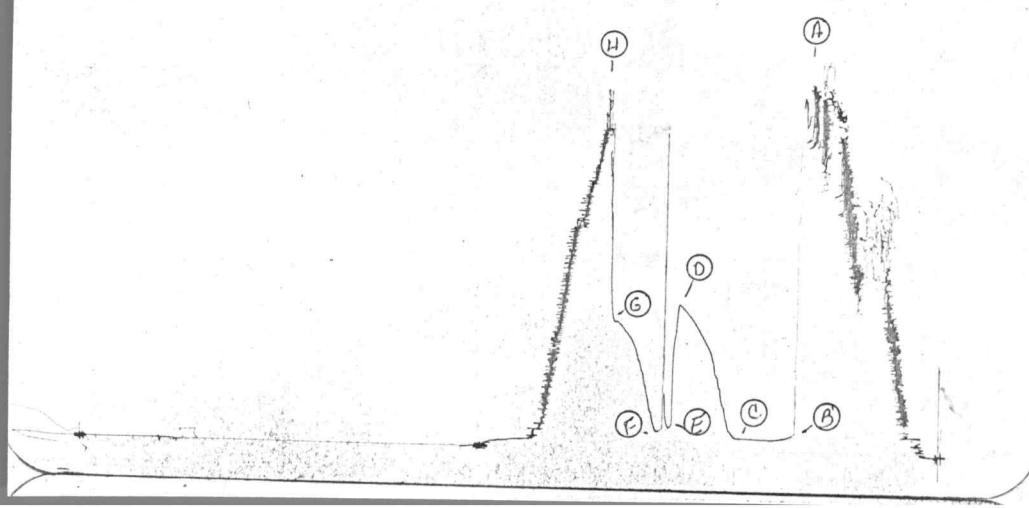

TKT #3850

0


7 1563

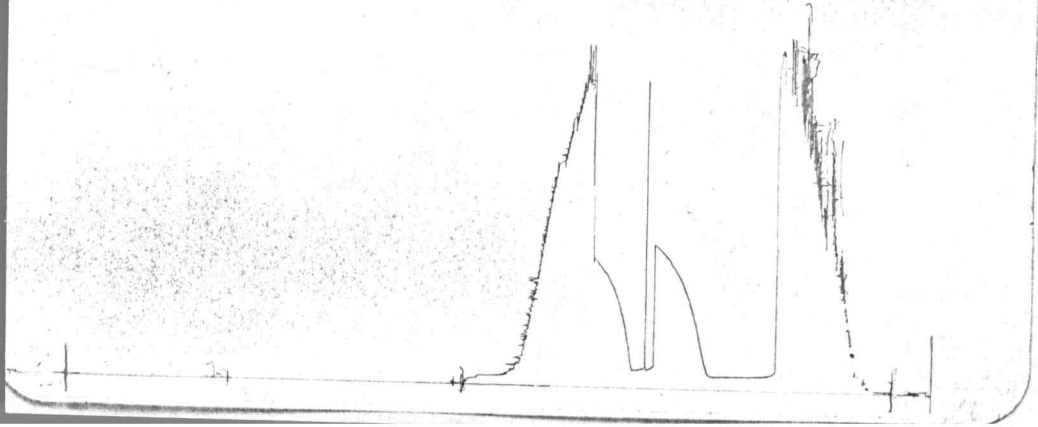

FORMATION

TEST

REPORT

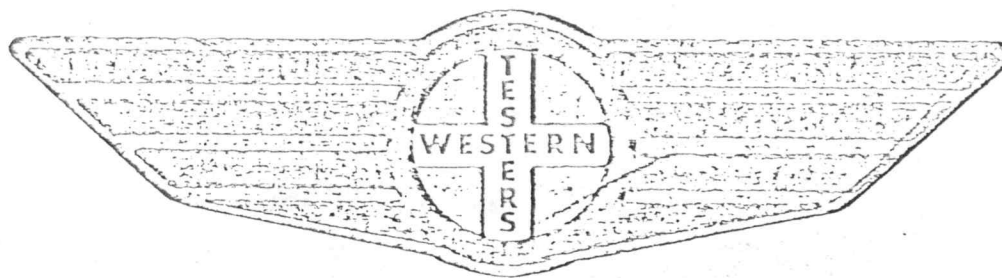

Home Office:

Wichita, Kansas 67201

P.O. Box 1599

Phone (316) 262-5861

WESTERN TESTING CO. INC.
SUBSURFACE PRESSURE SURVEY

DATE: 12/13/84

TICKET #3850

CUSTOMER: PETROLEUM ENERGY INC.

LEASE: "E" MILLER

WELL: 1

TEST: 1

GEOLOGIST: WREATH

ELEVATION (KB): 1713

FORMATION: ARBUCKLE

SECTION: 4

TOWNSHIP: 20S

RANGE: 9W

COUNTY: RICE

STATE: KANSAS

GAUGE SN #3473

RANGE: 4000

CLOCK: 12

INTERVAL TEST FROM: 3181 FT TO: 3234 FT TOTAL DEPTH: 3234 FT

DEPTH OF SELECTIVE ZONE: FT

PACKER DEPTH: 3176 FT SIZE: 6 5/8 IN PACKER DEPTH: 3181 FT SIZE: 6 5/8 IN

PACKER DEPTH: FT SIZE: IN PACKER DEPTH: FT SIZE: IN

DRILLING CONTRACTOR: ALLEN DRLG

MUD TYPE: STARCH

VISCOSITY: 40

WEIGHT: 9.8

WATER LOSS (CC): 16.4

CHLORIDES (P.P.M.): 68000

JARS - MAKE:

SERIAL NUMBER:

DID WELL FLOW?

REVERSED OUT?

DRILL COLLAR LENGTH: 121 FT I.D.: 2.25 IN

WEIGHT PIPE LENGTH: FT I.D.: IN

DRILL PIPE LENGTH: 3039 FT I.D.: 3.8 IN

TEST TOOL LENGTH: 21 FT TOOL SIZE: 5 1/2 OD IN

ANCHOR LENGTH: 53 FT SIZE: 5 1/2 OD IN

SURFACE CHOKE SIZE: 3/4 IN BOTTOM CHOKE SIZE: 3/4 IN

MAIN HOLE SIZE: 7 7/8 IN TOOL JOINT SIZE: 4 1/2 XH IN

BLOW: INITIAL FLOW PERIOD WEAK BLOW. HOSE 1" IN BUCKET.

DIED IN 37 MINUTES. REMAINED DEAD.

FINAL FLOW PERIOD NO BLOW. FLUSHED TOOL IN 7

MINUTES. WEAK SURFACE BLOW. DIED IN 3 MINUTES.

RECOVERED: 60 FT OF: SLIGHTLY GAS & OIL CUT MUD.

RECOVERED: FT OF: (10% GAS; 5% OIL; 85% MUD).

RECOVERED: FT OF:

RECOVERED: FT OF:

RECOVERED: FT OF:

RECOVERED: FT OF:

RECOVERED: FT OF:

RECOVERED: FT OF:

RECOVERED: FT OF:

REMARKS:

TIME SET PACKER(S): 4:30 AM

TIME STARTED OFF BOTTOM: 6:45 AM

WELL TEMPERATURE: 104 °F

INITIAL HYDROSTATIC PRESSURE:

(A) 1846 PSI

INITIAL FLOW PERIOD MIN: 45

(B) 59 PSI TO (C) 67 PSI

INITIAL CLOSED IN PERIOD MIN: 45

(D) 762 PSI

FINAL FLOW PERIOD MIN: 15

(E) 119 PSI TO (F) 96 PSI

FINAL CLOSED IN PERIOD MIN: 30

(G) 673 PSI

FINAL HYDROSTATIC PRESSURE


(H) 1793 PSI

LC# 6403

7

I

13403

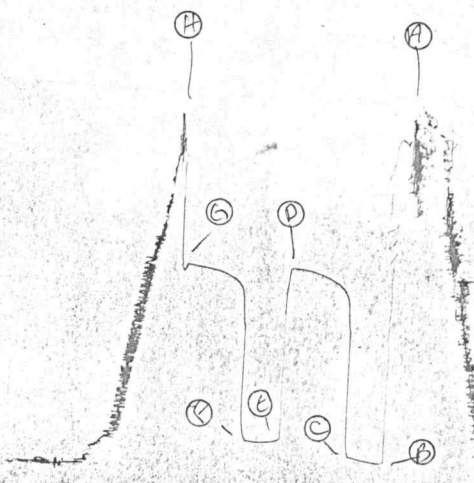

HC# 6403

7




1563



FORMATION

TEST

REPORT

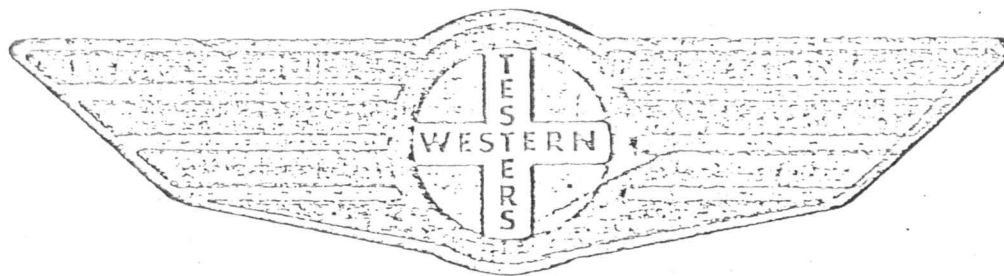

Home Office:


Wichita, Kansas 67201

P.O. Box 1599

Phone (316) 262-5861

Company PETROLEUM ENERGY, INC. Lease and Well No. #1 "E" MILLER Sec. 4 Twp. 20S Rge. 9W Test No. 2 Date 12/13/84


TRT # 6404
I

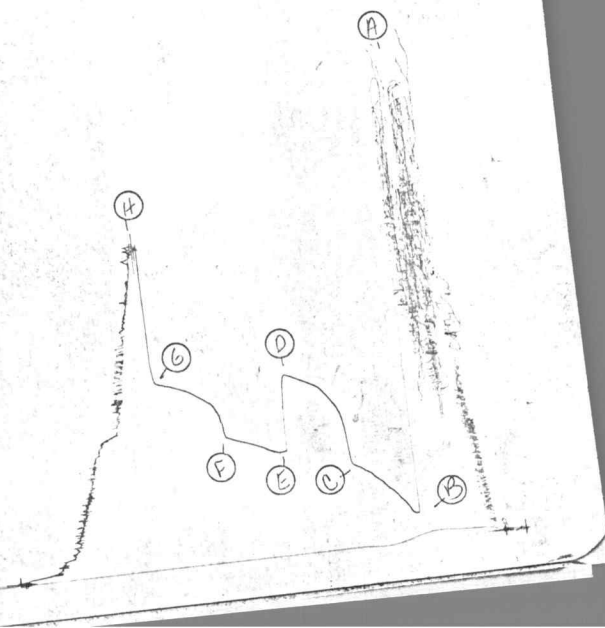

FORMATION

TEST

REPORT

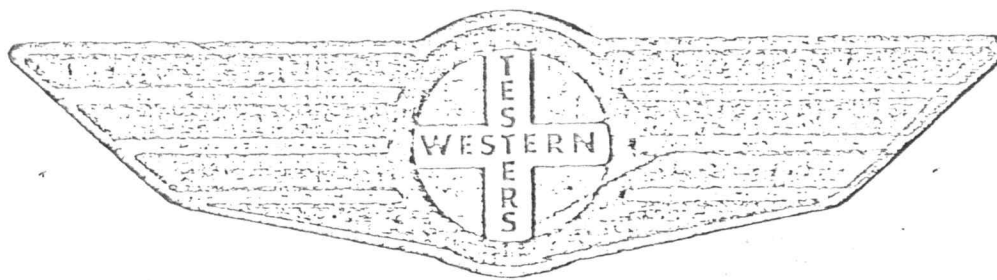

Home Office:

Wichita, Kansas 67201

P.O. Box 1599

Phone (316) 262-5861

company PETROLEUM ENERGY, INC. Lease and Well No. #1 "E" MILLER Sec. 4 Twp. 20S Rge. 9W Test No. 3 Date 12/14/84

