


Company	Eldon J. Schierling	Lease Name	Hall	
Address	333 E. English, Ste 240	Lease #	2	
CSZ	Wichita, KS 67202	Legal Desc	C SW NE	Job Ticket 4033
Attn.	Eldon J. Schierling	Section	15	Range 13w
		Township	21s	
		County	Stafford	State KS
		Drilling Cont	Petromart Drilling #2	
Comments	Reversed oil into vac. truck. Times ran:30-45-30-45			

GENERAL INFORMATION

Test # 1	Test Date 7/7/2007	Chokes 3/4	Hole Size 7 7/8
Tester Richard Holtz		Top Recorder # W1023	
Test Type Conventional Bottom Hole		Mid Recorder #	
Successful Test		Bott Recorder # 13564	
# of Packers 2.0	Packer Size 6 3/4	Mileage 70	Approved By
Mud Type Gel Chem		Standby Time 0	
Mud Weight 9.5	Viscosity 49.0	Extra Equipmnt circ. sub	
Filtrate 13.2	Chlorides 13800	Time on Site 2:00 AM	
		Tool Picked Up 5:30 AM	
		Tool Layed Dwn 2:30 PM	
Drill Collar Len 120.0		Elevation 1877.00	Kelley Bushings 1882.00
Wght Pipe Len 0			
Formation Arbuckle		Start Date/Time 7/7/2007 5:03 AM	
Interval Top 3592.0	Bottom 3607.0	End Date/Time 7/7/2007 2:31 PM	
Anchor Len Below 15.0	Between 0		
Total Depth 3607.0			
Blow Type	Initial Flow, Strong blow, BOB instantly, strong blow back on shut in, BOB in 25 min. Final Flow, Strong blow, BOB instantly, Blow back on shut in 7 in.		

RECOVERY

Feet	Description	Gas	Oil	Water	Mud
3200	oil (gravity 40)	0% 0ft	100% 3200ft	0% 0ft	0% 0ft
DST Fluids	0				

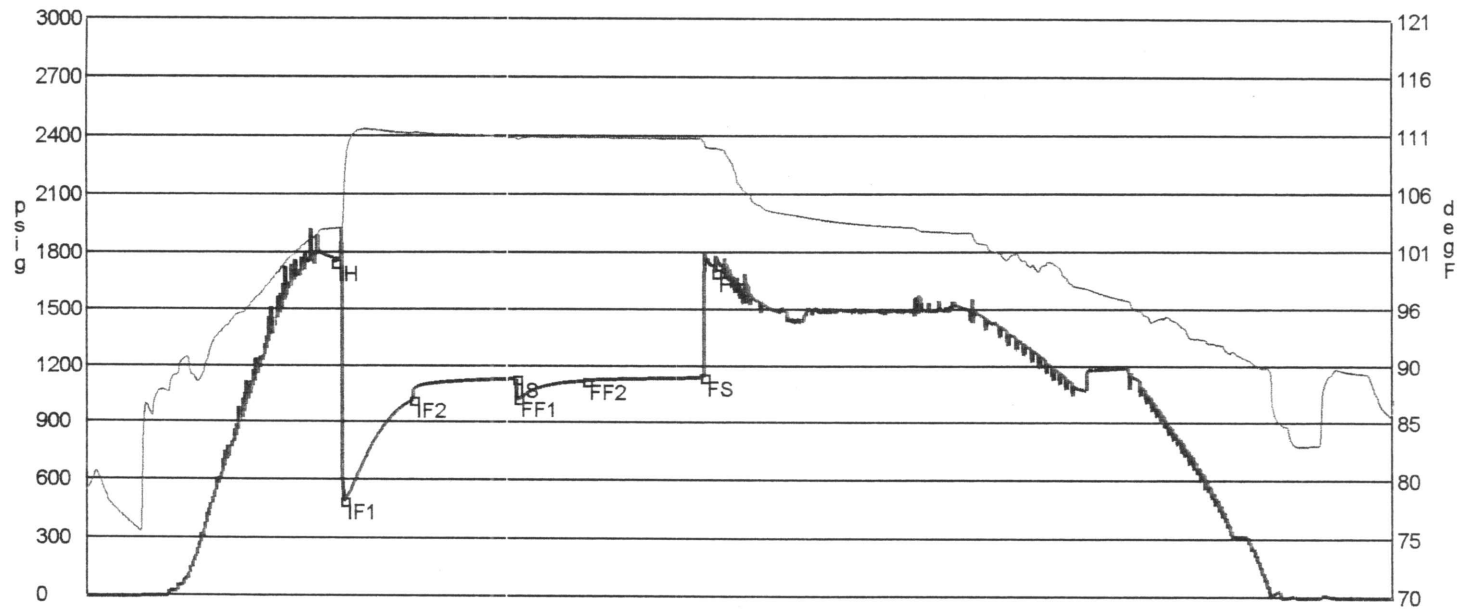

	Date	Time	Pressure	Temp	
IH	7/7/2007 6:49:15 AM	1.770833	1745.99	102.704	Initial Hydro-static
IF1	7/7/2007 6:53:15 AM	1.8375	492.02	104.748	Initial Flow (1)
IF2	7/7/2007 7:23:15 AM	2.3375	1018.668	111.043	Initial Flow (2)
IS	7/7/2007 8:08:30 AM	3.091667	1130.955	110.671	Initial Shut-In
FF1	7/7/2007 8:09:00 AM	3.1	1025.027	110.62	Final Flow (1)
FF2	7/7/2007 8:38:45 AM	3.595833	1119.968	110.701	Final Flow (2)
FS	7/7/2007 9:30:15 AM	4.454167	1141.592	110.33	Final Shut-In
FH	7/7/2007 9:35:15 AM	4.5375	1693.784	109.753	Final Hydro-static

GAS FLOWS

<u>Min Into IFP</u>	<u>Min Into FFP</u>	<u>Gas Flows</u>	<u>Pressure</u>	<u>Choke</u>
---------------------	---------------------	------------------	-----------------	--------------

Company	Eldon J. Schierling	Lease Name	Hall	
Address	333 E. English, Ste 240	Lease #	2	
CSZ	Wichita, KS 67202	Legal Desc	C SW NE	Job Ticket 4033
Attn.	Eldon J. Schierling	Section	15	Range 13w
		Township	21s	
		County	Stafford	State KS
		Drilling Cont	Petromart Drilling #2	
Comments	Reversed oil into vac. truck. Times ran:30-45-30-45			


GENERAL INFORMATION

Test # 2	Test Date 7/8/2007	Chokes 3/4	Hole Size 7 7/8
Tester Richard Holtz		Top Recorder # w1023	
Test Type Conventional Bottom Hole		Mid Recorder #	
Successful Test		Bott Recorder # 13564	
# of Packers 2.0	Packer Size 6 3/4	Mileage 70	Approved By
Mud Type Gel Chem		Standby Time 0	
Mud Weight 9.5	Viscosity 49.0	Extra Equipmnt circ sub	
Filtrate 13.2	Chlorides 13800	Time on Site 7:30 PM	
		Tool Picked Up 9:00 PM	
		Tool Layed Dwn 7:00 AM	
Drill Collar Len 120.0		Elevation 1877.00	Kelley Bushings 1882.00
Wght Pipe Len 0			
Formation Arbuckle		Start Date/Time 7/7/2007 8:28 PM	
Interval Top 3607.0	Bottom 3621.0	End Date/Time 7/8/2007 7:48 AM	
Anchor Len Below 14.0	Between 0		
Total Depth 3621.0			
Blow Type Initial Flow, strong blow, BOB instantly, Strong blow back, Finall Flow, strong blow, BOB instantly Strong blow back.			

RECOVERY

Feet	Description	Gas	Oil	Water	Mud
2600	oil(Gravity 33)	0% 0ft	100% 2600ft	0% 0ft	0% 0ft
120	mud cut water	0% 0ft	0% 0ft	94% 112.8ft	6% 7.2ft

DST Fluids 22000

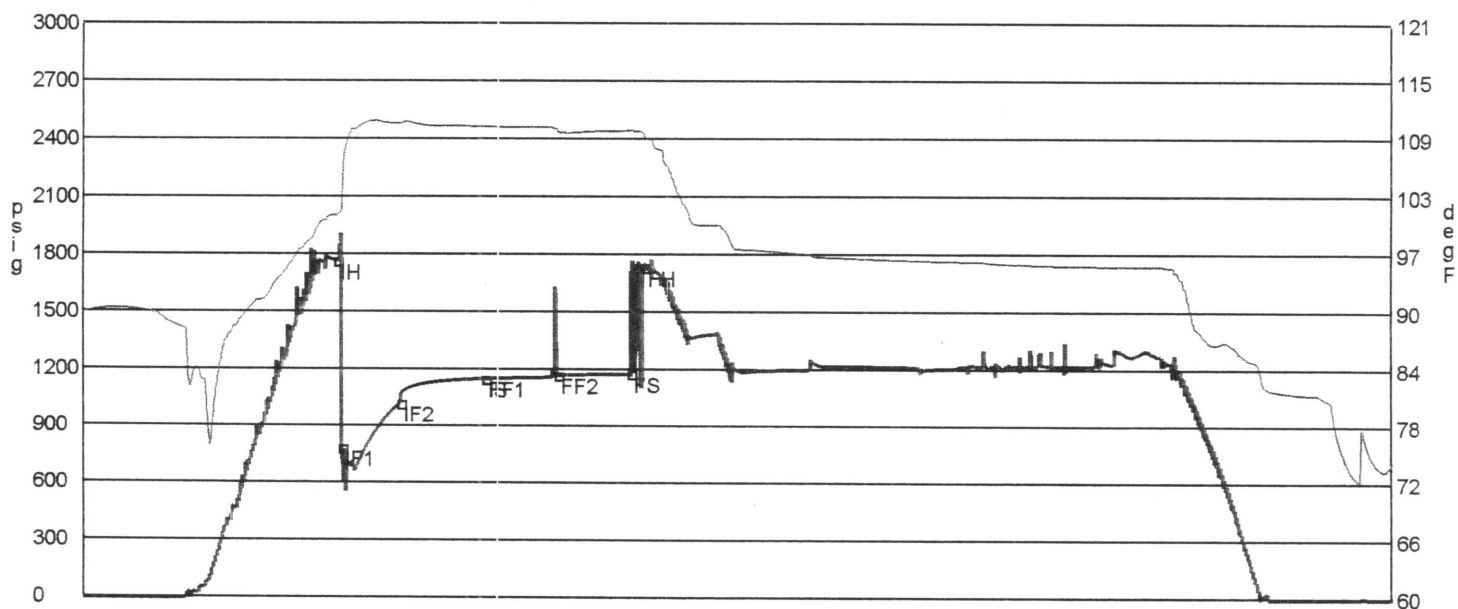

	Date	Time	Pressure	Temp	
IH	7/7/2007 10:38:35 PM	2.175	1763.562	100.778	Initial Hydro-static
IF1	7/7/2007 10:40:50 PM	2.2125	781.849	101.257	Initial Flow (1)
IF2	7/7/2007 11:11:35 PM	2.725	1019.248	110.46	Initial Flow (2)
IS	7/7/2007 11:55:35 PM	3.458333	1148.921	110.109	Initial Shut-In
FF1	7/7/2007 11:56:05 PM	3.466667	1149.091	110.096	Final Flow (1)
FF2	7/8/2007 12:33:50 AM	4.095833	1169.837	109.647	Final Flow (2)
FS	7/8/2007 1:11:50 AM	4.729167	1176.672	109.699	Final Shut-In
FH	7/8/2007 1:19:05 AM	4.85	1734.811	109.188	Final Hydro-static

GAS FLOWS

Min Into IFP Min Into FFP Gas Flows Pressure Choke