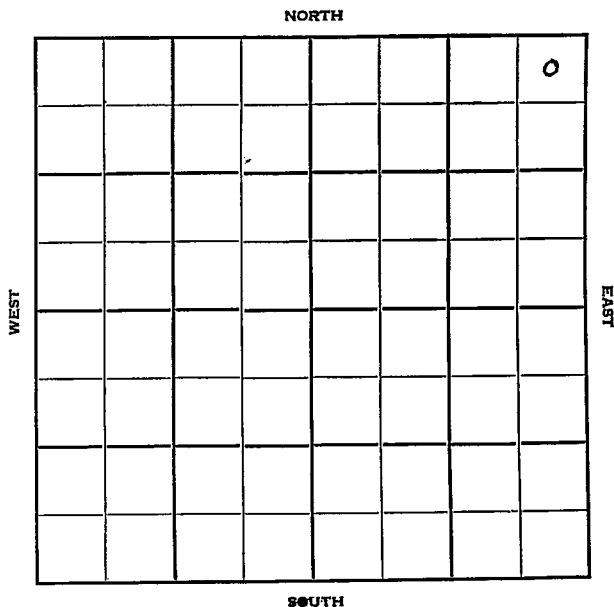


Section 14 Township 21 Range 14WWell No. #1 WrightCompany J. W. Bird

KANSAS

Stafford

Sec. 14 Twp. 21 R. 14 -W

Well No. #1 Wright Farm

J W Bird Company

Derby Drlg. Contractor

Wildcat
330 Ft. from N. Line


 Ft. from S. Line

330 Ft. from E. Line

 Ft. from W. Line

NE NE NE

Phillips DHM



1950 Elev. 1923' REPORT

12/13 Cellar & Pits

1951
3/14

Spud 12-14-50

Oil well TD 3699'

8" @ 250 Anhy 825, Heeb 3236,
Toronto 3255, Doubl 3280, Br. lime
3356, Lans. 3367, SO 3395-3402,
DST 3390-3402 open 1 hr. Rec. 820'
mud & SW.

Por. 3449-57, Por. & SO 3482-91
DST 3481-90 open 1 hr. Rec. 330' oil,
60' MCO


DST 3536-48 open 30 min. Rec. 880'
water

Arb. 3695 TD 3699, 5" @ 3696,
FU 3000' fluid, 950' water,

est 25 bopd, SP 3680,
20/3483-88 FU 100' oil 250 A

Comp. 258 bopd 3% water

COMPLETED

County Stafford State KansasSec. 14 (^{Blk.}_{Twp.}) 21 (^{Sur.}_{Rge.}) 14W Map No.Operator J. W. BirdWell No. 1 Farm WrightElev. 1923 Location NE NE NE330 Ft. From N Line NE330 Ft. From E Line Quarter

1st. Report

Completion MAR 14 1951Remarks WildcatDerby Drlg. - Contr.Spudding Date 12-14-50Drlg. Data Oil well TD 36998" @ 250 Anhy 825 Heeb. 3236Toronto 3255 Dougl 3280 Br. lime 3356Lans. 3367 SO 3395-3402 DST 3390-3402open 1 hr. Rec. 820' mud & sw Por. 3449-57 Por. & SO 3482-91 DST 3481-90open 1 hr. Rec. 330' oil 60' mcoDST 3536-48 open 30 min. Rec. 880' waterArb. 3695 TD 3699 5" @ 3696FU 3000' fluid 950' water est. 25 bopdSP 3680 20/ 3483-88 FU 100' oil 250 AComp. 258 bopd 3% water

J. E. TYRA