


Section 15 Township 21 Range 16 WWell No. #1 GlazeCompany Mufin Drlg. & Aurora Gasoline

NORTH

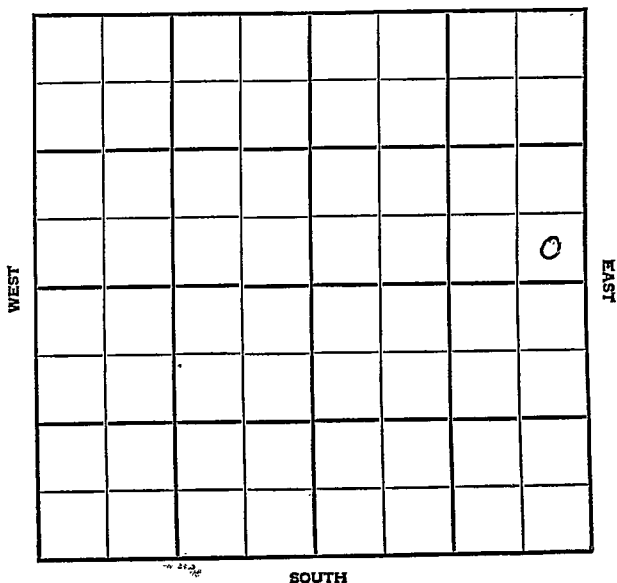

HOT FILE

Pawnee

KANSAS

SEC.	TWP.	R.
15	21	16 W

WELL NO.

#1 Glaze

FARM

COMPANY

Murfin Drlg. & Aurora Gasoline

CONTRACTOR

Murfin


Wildcat

_____ Ft. from N. Line

_____ Ft. from S. Line

_____ Ft. from E. Line

_____ Ft. from W. Line



SE SE NE

SDX DHC \$2500.00

Lse. (S-20031)

Magnolia AC

	ELEVATION	REPORT
1956	1978' Gr. 1980'	DF (WH6-DC30)
	1983' KB	

3/14 Arbuckle test well @3980'
To be commenced by March 15, 1956
To be completed by April 15, 1956
(See DHC Ltr. 3-13-56)

3/7 Comm. 3-3-56
8" @ 990/500
Drlg. 1870' (FR.Tkt.)

3/2 MIRT. (Card-Aurora Gas.)
3/5 Set 8-5/8" @ 990 w/500 sx. WOC "
3/6 Drlg. 1875' "
3/7 Drlg. 2235' "
3/9 Drlg. 2965' "
3/10 Drlg. 3208' "
3/12 DST #1, 3473-97, open 45 min, rec 30'
mud, IFP 50-50# BHP 1060# 20"
Drlg. 3492' (Card-Aurora Gaso.)
3/13 Drlg. 3663' "
3/14 Drlg. 3790' "
3/15 DST #2, 3756-3823, open 30", rec 15'
mud. IFP 80-90# BHP 120# 20".
Circ. 3874# Sample tops: Anh. 986
Heeb 3374', Br Ls 3468', Lans 3477',
BKC ~~3721~~ 3712', Viola 3746', Simp 3821
(Card-Aurora Gasoline)

1956

3/16

Sample top: Arb. 3882

TD 3910' Elec. Log. P & A

Elec. Log Tops:

Heeb 3364'; Tor. 3382', BL 3458',

Lans 3468', Vi 3736', Simp 3821'

Simp sd 3862', Arb. 3876'. TD 3901'

P & A. (Card-Aurora Gasoline)

3/22

Advised Contract Section - P & A

ABANDONED

4/10

Received copy of Radiation Guard

Log- Given to S.A. Shannon, Div. Geol.

County Pawnee Elev. _____
 Sec. 15 Twp. 21 Rge. 16W
 Company Murfin Drilling Aurora Gasoline
 FarmName Glaze No. 1

Co.

Lse.

No.

Sec.

T.

R.

TOPS

DEPTH

LOG

DATUM

Loc. in Sec.

SE SE NE

Tp.

H.

Tr.

Dg.

BL.

L.

K.C.

B.K.C.

Ce.

C.

M.

M.

K.

Mz.

Mq.

V.

S.

S.

A.

R.

Pc.

G.

T.D.

Geol.

Contr.

Murfin

Pool

Wildcat

D/H M
 FIRST REPORT
 MAR 7 '56

Date Comm. 3-3-56 Magnolia AC
 8" @ 990/500 drlg. 1870

County Pawnee Elev. 1980
 Sec. 15 Twp. 21 Rge. 16W
 Company Murfin Drilling & Aurora Gasoline
 FarmName Glaze No. 1

TOPS	DEPTH	LOG	DATUM	Loc. in Sec.
Anh.	<u>1986</u>			<u>SE SE NE</u>
Tp.				
H.	<u>3369</u>	<u>3364</u>		
Tr.		<u>3382</u>		
Dg.				
Bl.	<u>3463</u>	<u>3458</u>		
L.	<u>3472</u>	<u>3468</u>	<u>1488</u>	Geol.
K.C.				Contr.
B.K.C.	<u>3712</u>		<u>1732</u>	<u>Murfin</u>
Ce.				Pool
C.				<u>Wildcat</u>
M.				
M.				
K.				
Mz.				
Ma.				
V.	<u>3746</u>	<u>3736</u>	<u>1756</u>	
S.	<u>3821</u>	<u>3821</u>	<u>1841</u>	
S. <u>54</u>		<u>3862</u>	<u>1882</u>	
A.	<u>3882</u>	<u>3876</u>	<u>1896</u>	
R.				
Pe.				
G.				
T.D.	<u>3901</u>			

ABANDONED

Date Comm. 3-3-56 MAR 21 1956
8" @ 990/500 DST 3468-92 open 45 min.
rec. 30' mud 1060/20" DST 3756-3823
open 1/2 hr. rec. 15' mud 120/20"

D & A