


12-22-12W

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

Company- STEARNS PETROLEUM, INC.
Farm- Willinger No. 1

SEC. 12 T. 22 R. 12W
NE NW SE

Total Depth. 3572
Comm. 5-28-55 Comp. 6-8-55
Shot or Treated.
Contractor. Stearns Petroleum, Inc.
Issued. 9-3-55

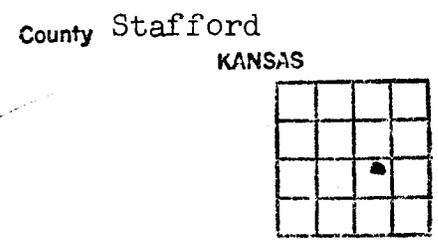

CASING:
8 5/8 @ 208' w/ 175 sx cmt.
5 1/2 @ 3569' w/ 125 sx cmt.

Elevation. 1797 DF
Production. 45 BOPD

Figures indicate Bottom of Formations.

surface clay & sand	95
shale & shells	150
lime	208
cement & lime	245
red bed	310
red bed & shale	552
anhydrite	573
shale	900
shale & shells	1530
shale & sandy lime	1595
lime & shale	1740
lime	2295
shale & lime	3135
lime	3485
Viola chert	3513
Simpson shale	3568
Arbuckle	3572
Total Depth	
TOPS?	
Anhydrite	552
Heebner	3062
Brown lime	3191
Lansing-KC	3216
Conglomerate	3467
Viola	3486
Simpson sand	3564
Arbuckle	3568

Swab test 47.38 BO/8 hrs. NSW