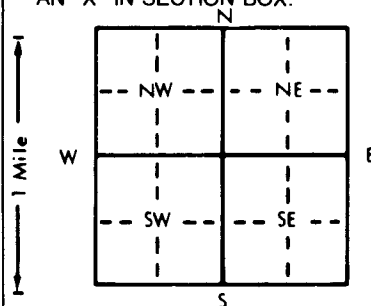


1 LOCATION OF WATER WELL: County: Ellis Fraction: SW 1/4 SW 1/4 SW 1/4 Section Number: 30 Township Number: T 13 S Range Number: R 18 EW

Distance and direction from nearest town or city street address of well if located within city?  
1341 College Hays, Ks 67601

2 WATER WELL OWNER: Brian Henderson  
 RR#, St. Address, Box #: 1341 College  
 City, State, ZIP Code: Hays, Ks 67601  
 Board of Agriculture, Division of Water Resources  
 Application Number:

3 LOCATE WELL'S LOCATION WITH AN "X" IN SECTION BOX: 

4 DEPTH OF COMPLETED WELL: 60 ft. ELEVATION: N/A  
 Depth(s) Groundwater Encountered 1. 24 ft. 2. 22 ft. 3. 18 ft.  
 WELL'S STATIC WATER LEVEL 22 ft. below land surface measured on mo/day/yr 3-20-97  
 Pump test data: Well water was 24 ft. after 1 hours pumping 18 gpm  
 Est. Yield 35+ gpm; Well water was 24 ft. after 1 hours pumping 18 gpm  
 Bore Hole Diameter 9/16 in. to 60 ft., and 60 in. to 60 ft.  
 WELL WATER TO BE USED AS:  
 Domestic 3 Feedlot 6 Oil field water supply 9 Dewatering 12 Other (Specify below)  
 2 Irrigation 4 Industrial 7 Lawn and garden only 10 Monitoring well  
 Was a chemical/bacteriological sample submitted to Department? Yes  No  If yes, mo/day/yr sample was submitted  
 Water Well Disinfected? Yes  No

5 TYPE OF BLANK CASING USED:  
 1 Steel 3 RMP (SR) 5 Wrought iron 8 Concrete tile CASING JOINTS: Glued  Clamped   
 2 PVC 4 ABS 6 Asbestos-Cement 9 Other (specify below) Welded   
 Blank casing diameter 5 in. to 30 ft., Dia 18 in. to 30 ft., Dia 18 in. to 30 ft., Dia 18 in. to 30 ft.  
 Casing height above land surface 18 in., weight 18 lbs./ft. Wall thickness or gauge No. SDR 26  
 TYPE OF SCREEN OR PERFORATION MATERIAL:  
 7 PVC 10 Asbestos-cement  
 1 Steel 3 Stainless steel 5 Fiberglass 8 RMP (SR) 11 Other (specify)   
 2 Brass 4 Galvanized steel 6 Concrete tile 9 ABS 12 None used (open hole)  
 SCREEN OR PERFORATION OPENINGS ARE:  
 1 Continuous slot  3 Mill slot 5 Gauzed wrapped 8 Saw cut 11 None (open hole)  
 2 Louvered shutter 4 Key punched 6 Wire wrapped 9 Drilled holes  
 7 Torch cut 10 Other (specify)   
 SCREEN-PERFORATED INTERVALS: From 50 ft. to 30 ft., From 50 ft. to 30 ft., From 50 ft. to 30 ft., From 50 ft. to 30 ft.  
 GRAVEL PACK INTERVALS: From 50 ft. to 23 ft., From 50 ft. to 23 ft., From 50 ft. to 23 ft., From 50 ft. to 23 ft.

6 GROUT MATERIAL: 1 Neat cement 2 Cement grout  3 Bentonite 4 Other   
 Grout Intervals: From 23 ft. to surface ft., From 23 ft. to surface ft., From 23 ft. to surface ft., From 23 ft. to surface ft.  
 What is the nearest source of possible contamination:  
 1 Septic tank 4 Lateral lines 7 Pit privy 10 Livestock pens  14 Abandoned water well  
 2 Sewer lines 5 Cess pool 8 Sewage lagoon 11 Fuel storage 15 Oil well/Gas well  
 3 Watertight sewer lines 6 Seepage pit 9 Feedyard 12 Fertilizer storage 16 Other (specify below)  
 13 Insecticide storage  
 Direction from well? West 40'  
 How many feet? West 40'

FROM	TO	LITHOLOGIC LOG	FROM	TO	PLUGGING INTERVALS
0	5	loess			
5	15	clay			
15	24	clay brn w/ interm lms p's.			
24	50	sol. coarse well rd, mature			
50	53	soft blue grey clay			
53	60	hard shale			

7 CONTRACTOR'S OR LANDOWNER'S CERTIFICATION: This water well was  (1) constructed, (2) reconstructed, or (3) plugged under my jurisdiction and was completed on (mo/day/year) 3-20-97 and this record is true to the best of my knowledge and belief. Kansas Water Well Contractor's License No. 608 This Water Well Record was completed on (mo/day/yr) 3-27-97 under the business name of Yellow Jacket Drilling by (signature) Eric F. [Signature]