

Flow Time	1st 10 Min.	2nd 60 Min.	Date	11-30-63	Ticket Number	381158
Closed In Press. Time	1st 30 Min.	2nd 30 Min.	Kind of Job	Open Hole	Halliburton District	Great Bend
Pressure Readings	Field	Office Corrected	Tester	C.L. Nutting	Witness	J. Jespersen
Depth Top Gauge	4587 Ft.	no Blanked Off	Drilling Contractor	Jones-Gebert Oil Inc.		
BT. P.R.D. No.	239	12 Hour Clock	Elevation	2456'	Top Packer	4595'
Initial Hydro Mud Pressure	2417	2444	Total Depth	4630'	Bottom Packer	4600'
Initial Closed in Pres.	814	823	Interval Tested	4600-4630'	Formation Tested	Conglomerate
Initial Flow Pres.	18	1 15	Casing or Hole Size	7 7/8"	Casing Perfs.	Top Bot.
Final Flow Pres.	18	1 15	Surface Choke	1"	Bottom Choke	3/4"
Final Closed in Pres.	108	129	Size & Kind Drill Pipe	4 1/2" FH	Drill Collars Above Tester	2 1/4" I.D. x 240' LENGTH
Final Hydro Mud Pressure	2381	2412	Mud Weight	9.9	Mud Viscosity	42
Depth Cen. Gauge	Ft.	Blanked Off	Temperature	112 °F Est. °F Actual	Anchor Size & Length	ID 3.75" OD 5" X 30'
BT. P.R.D. No.		Hour Clock	Depths Mea. From	Derrick Floor	Depth of Tester Valve	4578 Ft.
Initial Hydro Mud Pres.			TYPE AMOUNT		Depth Back Pres. Valve	Ft.
Initial Closed in Pres.			Cushion	Ft.	Recovered	15 Feet of mud
Initial Flow Pres.	1		Recovered	Feet of		
Final Flow Pres.	1		Recovered	Feet of		
Final Closed in Pres.	2		Recovered	Feet of		
Final Hydro Mud Pres.			Oil A.P.I. Gravity		Water Spec. Gravity	
Depth Bot. Gauge	4626 Ft.	yes Blanked Off	Gas Gravity		Surface Pressure	psi
BT. P.R.D. No.	566	12 Hour Clock	Tool Opened	9:50-10:30 A.M. P.M.	Tool Closed	10:00-11:30 A.M. P.M.
Initial Hydro Mud Pres.	2437	2468	Remarks	Open tool at 9:50 AM with a weak blow.		
Initial Closed in Pres.	837	842		Closed at 10:00. Reopen tool at 10:30		
Initial Flow Pres.	38	1 36		dead, flush tool at 11:00. Closed at		
Final Flow Pres.	38	1 36		11:30. Out of hole at 12:00		
Final Closed in Pres.	152	151		No special reading adaptable.		
Final Hydro Mud Pres.	2379	2424				

FORMATION TEST DATA

* Potentiometric Surface Reference to Rotary Table When Elevation Not Given,
Fresh Water Corrected to 100° F.

Legal Location
Sec. - Twp. - Rng. C NE NW 10-23-25

Field Area

WILDCAT

County

HODGEMAN

State

KANSAS

JOHNSON
Lease Name


Well No.

Test No.


JONES GEBERT OIL INCORPORATED
Lease Owner/Company Name

KANSAS
Owner's District

↑
PRESSURE
↓

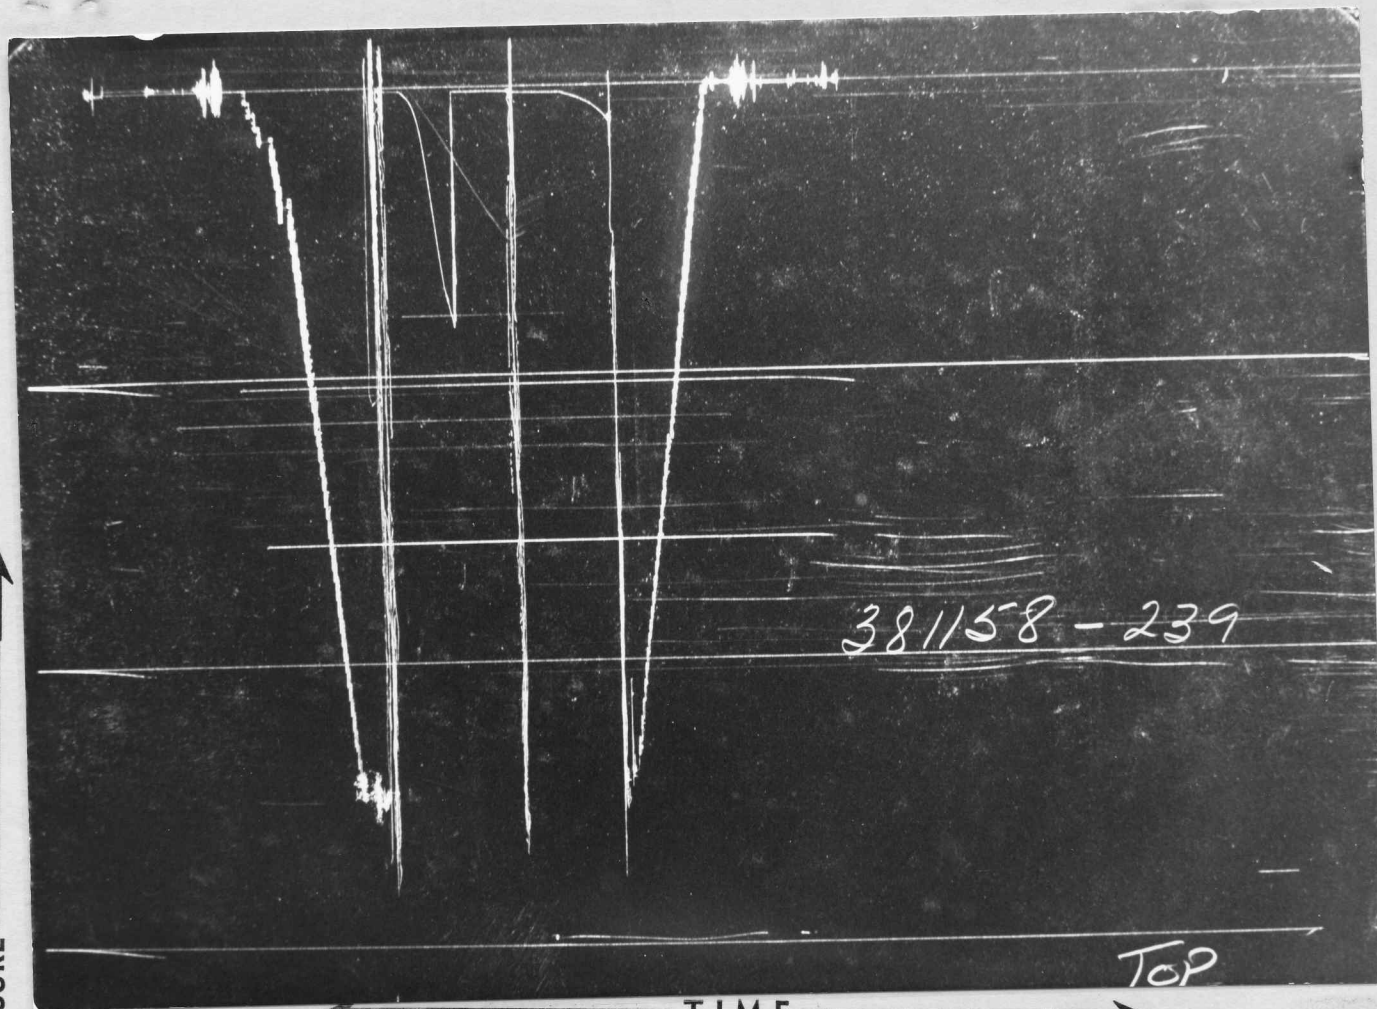

← TIME →

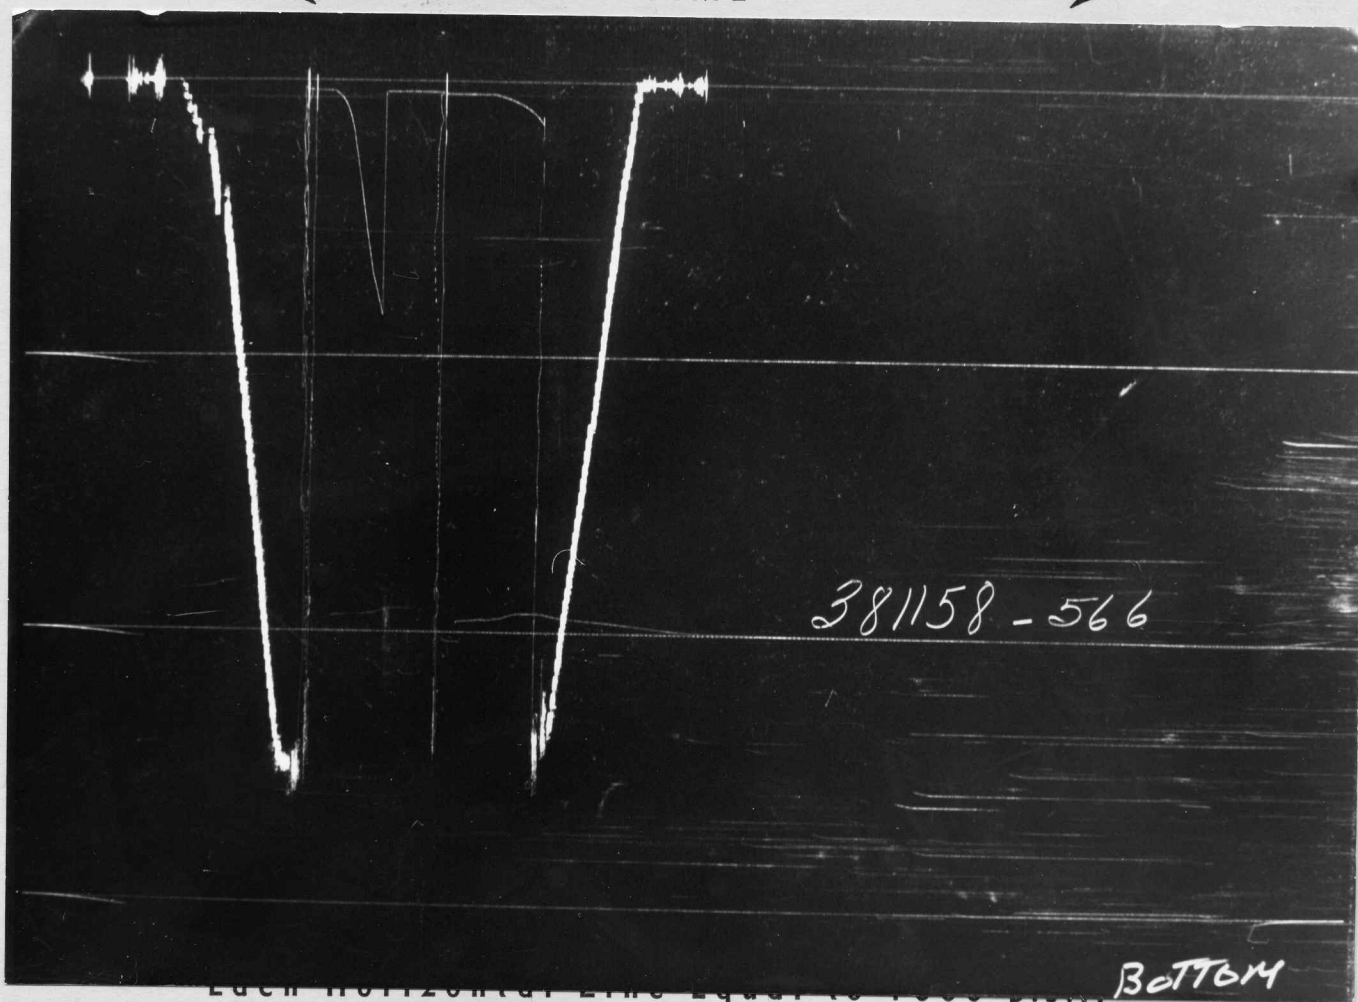

Each horizontal line equals 1000 p.s.i.