


Section 16 Township 23S Range 17W

Well No. #1 Fergus "B"

Company Hilton Drlg & Sunray

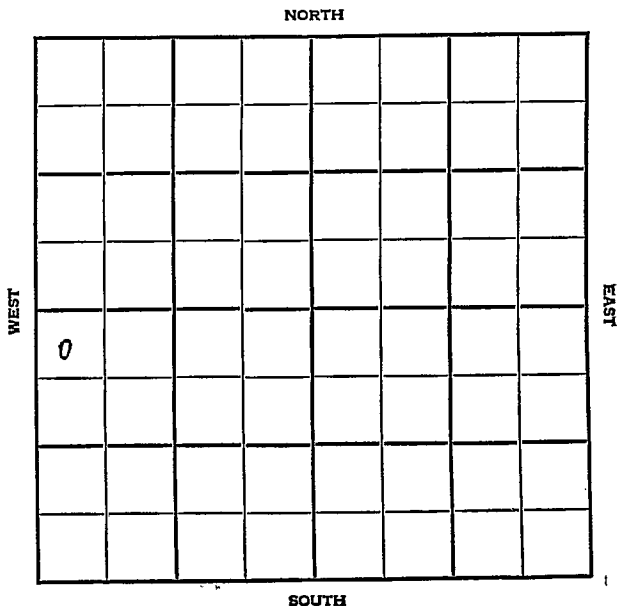

SEC.	TWP.	R.
16	23 S	17 W

WELL NO. # 1 Fergus "B" FARM

COMPANY Hilton Drlg. & Sunray

CONTRACTOR Hilton Tools
Garfield Pool


330 Ft. from N. Line

Ft. from S. Line

Ft. from E. Line

330 Ft. from W. Line

NW NW SW



	ELEVATION	REPORT
1954	2106'	

9/15	Spud 9-10-54 8-5/8" @ 237 Drlg. 2260'
12/1	Spud 9-10-54 Oil Well TD 4373' 8-5/8" @ 237' Heeb 3678', Br. Lime 3783', Lans 3787' Cong 4215' Ch Cong 4227' DST 4227'-38' opn 66 min, gas in 2 min 4,500,000 cfg. 1 pt. dist. 1380# Miss 4248' DST 4252'-81' opn 1 hr. rec 150' so & gcm, 180# Misener 4300' Viola 4344' TD 4373' 5" @ 4373' CO to 4360 36/ 4303-09 5 gwph frac. S/ 4 1/2 boph 55% Wtr. PB 4282' 72/ 4254-62 200 A frac. F/ 15 boph Comp F/ 36 bopd.

COMPLETED

County Pawnee State Kansas

Sec. 16 (Blk. Twp.) 23S (Sur. Rge.) 17W Map No.

Operator Hilton Drlg. & Sunray

Well No. I Farm Fergus "B"

Elev. _____ Location NW NW SW

0					
FIRST REPORT					

330 Ft. From N Line SW

330 Ft. From W Line Quarter

Ist. Report SEP 15 1954

Completion _____

Remarks _____

Hilton Toos

Spudding Date 9/10/54

Drlg. Data Garfield Pool

8 5/8 @ 237 Drgl. 2260

FABEN GILSTRAP

County Pawnee State Kansas
 Sec. 16 (Blk. Twp.) 23 (Sur. Rge.) 17W Map No.
 Operator Hilton Drlg. & Sunray
 Well No. 1 Farm Fergus "B"
 Elev. 2106 Location NW NW SW

330 Ft. From N Line SW
330 Ft. From W Line Quarter
 Ist. Report _____
 Completion DEC 1 1954
 Remarks Garfield Pool
Hilton Drlg. - Contr.
 Spudding Date 9-10-54

Drlg. Data Oil well TD 4373
8 5/8" @ 237 Heeb. 3678 Br. line 3783
Lans. 3787 Cong. 4215 Ch. Cong. 4227
DST 4227-38 open 66 min. gas in 2 min.
4,500,000 cfg 1 pt. dist. 1380#
Miss. 4248 DST 4252-81 open 1 hr.
Rec. 150' so & gcm 180# Misener 4300
Viola 4344 TD 4373 5" @ 4373, CO to
4360 36/ 4303-09 5 gwph frac
S/ 4 1/2 boph 55% wtr. PB 4282
72/ 4254-62 200 A frac F/ 15 boph
Comp. F/ 36 bopd

FABEN GILSTRAP