


Stafford

DX 78-1

Section 2 Township 23 Range 13W

Well No. #1 Mawhirter

Company D.R. Lauck & SDX

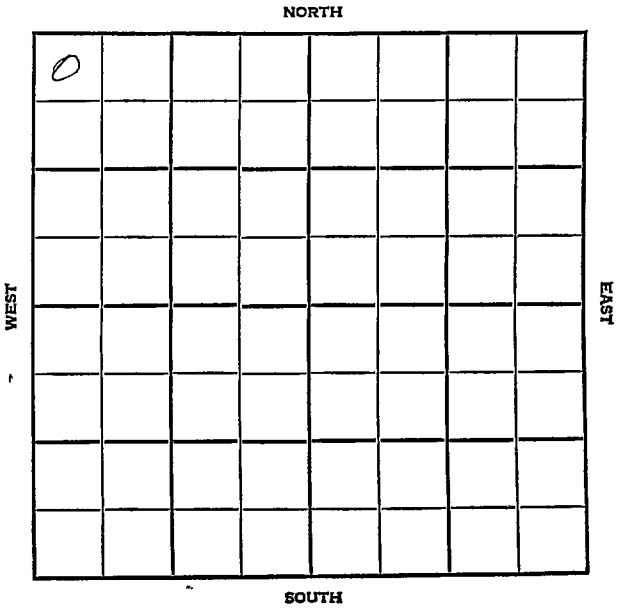

HOT FILE Stafford KANSAS

SEC. 2	TWP. 23	R.. 13 W
-----------	------------	-------------

WELL NO. FARM

1 Mawhirter

COMPANY

D. R. Lauck & SDX (EXPLORATORY-OBOG)

CONTRACTOR

Co. tools


Wildcat (NE Happy Valley Area)

_____ Ft. from N. Line

_____ Ft. from S. Line

_____ Ft. from E. Line

_____ Ft. from W. Line



NW NW NW

No Contact

1956	ELEVATION	DF. 1866' REBORT (TWH6-F010)
5/8		3850' Arbuckle Test
5/9		Set 8-5/8" @ 232 w/200 sks. (Card-Lauck)
5/10		Comm. 5-8-56 (FR Tkt)
5/10		Spudded 5-8-56.
5/10		Drlg. (DR#92)
5/11		Drlg. 1525' (Card-Lauck Drlg)
5/12		Drlg. 2017' "
5/12		Drlg. 2455' "
5/12		Drlg. 2985' "
5/14		Drlg. 3285' "
5/15		Drlg. 3480' "
5/16		Drlg. 3615' . DST 3577-3615' "
5/17		Drlg. 3754' "
5/18		T. Heebner 3264 (-1396)
		T. Brown lime 3400 (-1532)
		T. Lansing 3415 (-1545)
		DST #1, 3577-3615; open 1 hr, weak blow
		1 hr, rec 45' mud.
		BKG 3667' (-1799)
		T. Viola 3724' (-1856)
		T. Simpson shale 3785' (-1919)
		T. Arbuckle 3833' (-1965)
		DST #2, 3834-40', open 1 hr, weak steam
		blow 1 hr, rec 80' sul. wtr.
		BHP 1240# 30"
		TD 3840'. D & A (Card-Lauck Drlg.)

1956

5/23

Received copies of Driller's Log
Plugging Record, and geological
report.

- Giving to S.A. Shannon, Div. Geolog.
Wichita Kansas District.

5/23

TD 3840'. Plugged & Abandoned (DR#101)

5-23

D&A

TD 3840'

ABANDONED

FORM 513 SUNRAY

County Stafford Elev. 1866 DF
 Sec. 2 Twp. 23 Rge. 13W
 Company D. A. Lauck & Sunray Mid-Continent
 Farm Name Mawhirter No. 1

TOPS	DEPTH	LOG	DATUM	Loc. in Sec.
Ans				NW NW NW
	3264			
	3400			
	3415			
BKC	3667			Geol. _____ Contr. _____
Co.				Co. tools
C.				
M.				Pool
M.				Wildcat
K.				
Mz.				
Me.				
V.	3724			<div style="border: 1px solid black; padding: 5px; display: inline-block;"> 0 MAY 23 1956 ABANDONED ABANDONED </div>
S.	3785			
S.				
A	3833			
R.				
PC				
G.				
TD	3840			

Date Comm. 5-8-56 MAY 16 '56 8 1/2 @ 230
 / 200 Hb 3264 BK 3400 L59 3415
 @ 3440 MAY 23 '56 X DST 3577-3615
 op 1 hr. rec. 45' Md. BHP 1245/20"
 BKC 3667 Viola 3724 Sp 3785 A16
 3833 DST 3834-40 op 1 hr. rec.
 80' Mdy Sulp wtr. BHP 1240/20" RTD
 3840 Ran Log

King ...