


IND



**TRILOBITE
TESTING, INC.**

DRILL STEM TEST REPORT

Prepared For: **Trek Resources Inc.**

4295 Greenville Ave. STE 915
Dallas TX 75206

ATTN: Randy Killian

4 23S 22WHodgeman KS

Delker #1

Start Date: 2009.10.30 @ 18:30:39

End Date: 2009.10.31 @ 00:37:24

Job Ticket #: 37562 DST #: 1

15-083-21615-0000

Trilobite Testing, Inc

PO Box 1733 Hays, KS 67601

ph: 785-625-4778 fax: 785-625-5620

*2-
data
incomplete*

IND

Trek Resources Inc.

Delker #1

4 23S 22WHodgeman KS

DST # 1

Mississippian

2009.10.30



**TRILOBITE
TESTING, INC**

DRILL STEM TEST REPORT

TOOL DIAGRAM

Trek Resources Inc.

Delker #1

4295 Greenville Ave. STE 915
Dallas TX 75206

4 23S 22WHodgeman KS

Job Ticket: 37562

DST#: 1

ATTN: Randy Killian


Test Start: 2009.10.30 @ 18:30:39


Tool Information

Drill Pipe:	Length: 4334.00 ft	Diameter: 3.80 inches	Volume: 60.79 bbl	Tool Weight: 2000.00 lb
Heavy Wt. Pipe:	Length: 0.00 ft	Diameter: 0.00 inches	Volume: 0.00 bbl	Weight set on Packer: 25000.00 lb
Drill Collar:	Length: 63.00 ft	Diameter: 2.25 inches	Volume: 0.31 bbl	Weight to Pull Loose: 80000.00 lb
		Total Volume:	61.10 bbl	Tool Chased 0.00 ft
Drill Pipe Above KB:	31.00 ft			String Weight: Initial 60000.00 lb
Depth to Top Packer:	4393.00 ft			Final 60000.00 lb
Depth to Bottom Packer:	ft			
Interval between Packers:	52.00 ft			
Tool Length:	79.00 ft			
Number of Packers:	2	Diameter: 6.75 inches		

Tool Comments:

Tool Description	Length (ft)	Serial No.	Position	Depth (ft)	Accum. Lengths
Change Over Sub	1.00			4367.00	
Shut In Tool	5.00			4372.00	
Hydraulic tool	5.00			4377.00	
Jars	5.00			4382.00	
Safety Joint	2.00			4384.00	
Packer	5.00			4389.00	27.00 Bottom Of Top Packer
Packer	4.00			4393.00	
Stubb	1.00			4394.00	
Anchor	1.00			4395.00	
Recorder	0.00	8321	Inside	4395.00	
Recorder	0.00	6751	Inside	4395.00	
Perforations	14.00			4409.00	
Change Over Sub	1.00			4410.00	
Drill Pipe	31.00			4441.00	
Change Over Sub	1.00			4442.00	
Bullnose	3.00			4445.00	52.00 Bottom Packers & Anchor
Total Tool Length:	79.00				

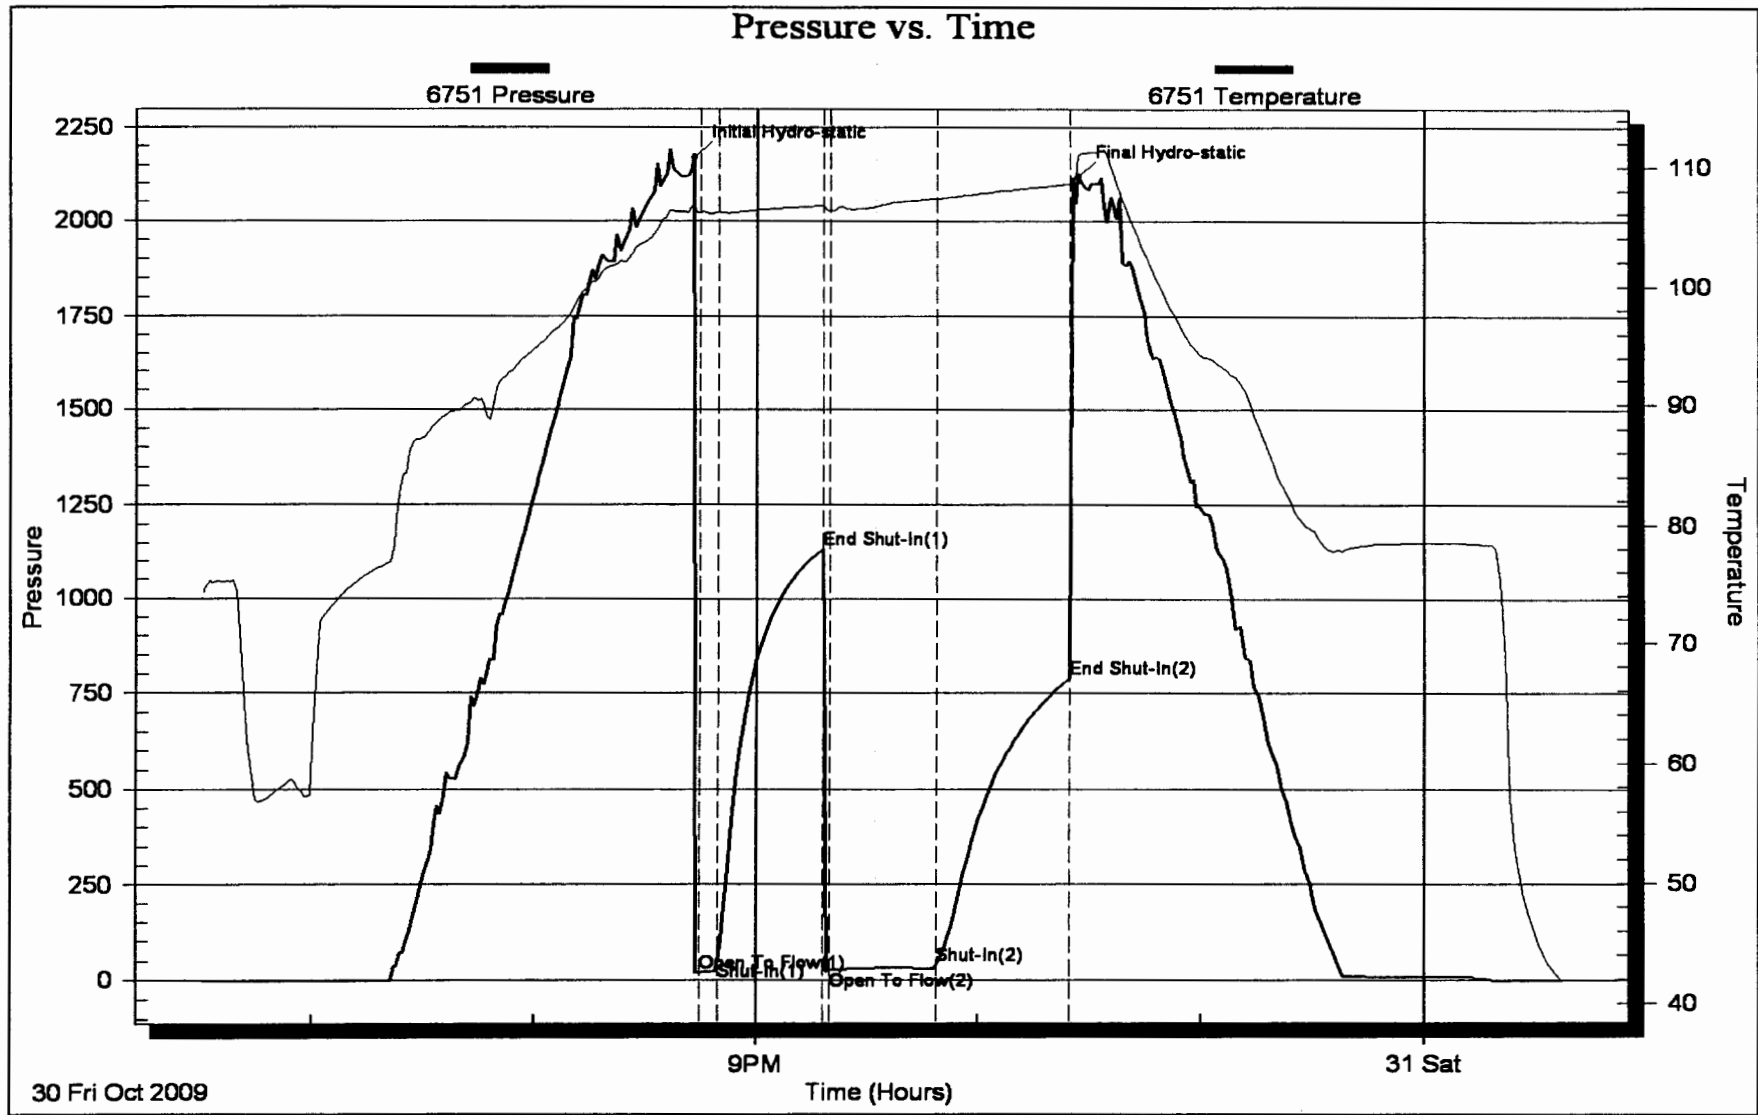

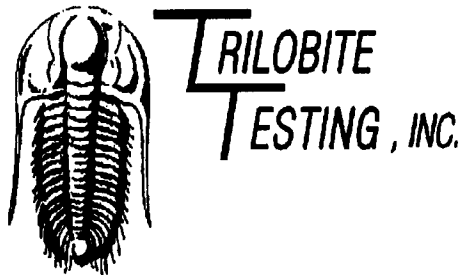

DRILL STEM TEST REPORT

Prepared For: **Trek Resources Inc.**

4295 Greenville Ave. STE 915
Dallas TX 75206

ATTN: Randy Killian

4 23S 22WHodgeman KS

Delker #1

Start Date: 2009.10.31 @ 07:00:46


End Date: 2009.10.31 @ 15:57:16

Job Ticket #: 37563 DST #: 2

Trilobite Testing, Inc

PO Box 1733 Hays, KS 67601

ph: 785-625-4778 fax: 785-625-5620



**TRILOBITE
TESTING, INC.**

DRILL STEM TEST REPORT

TOOL DIAGRAM

Trek Resources Inc.
4295 Greenville Ave. STE 915
Dallas TX 75206

ATTN: Randy Killian

Delker #1
4 23S 22WHodgeman KS
Job Ticket: 37563 **DST#: 2**
Test Start: 2009.10.31 @ 07:00:46

Tool Information

Drill Pipe:	Length: 4335.00 ft	Diameter: 3.80 inches	Volume: 60.81 bbl	Tool Weight: 2000.00 lb
Heavy Wt. Pipe:	Length: 0.00 ft	Diameter: 0.00 inches	Volume: 0.00 bbl	Weight set on Packer: 25000.00 lb
Drill Collar:	Length: 63.00 ft	Diameter: 2.25 inches	Volume: 0.31 bbl	Weight to Pull Loose: 70000.00 lb
		Total Volume:	61.12 bbl	Tool Chased 0.00 ft
Drill Pipe Above KB:	31.00 ft			String Weight: Initial 60000.00 lb
Depth to Top Packer:	4394.00 ft			Final 64000.00 lb
Depth to Bottom Packer:	ft			
Interval between Packers:	56.00 ft			
Tool Length:	83.00 ft			
Number of Packers:	2	Diameter: 6.75 inches		

Tool Comments:

Tool Description	Length (ft)	Serial No.	Position	Depth (ft)	Accum. Lengths
Change Over Sub	1.00			4368.00	
Shut In Tool	5.00			4373.00	
Hydraulic tool	5.00			4378.00	
Jars	5.00			4383.00	
Safety Joint	2.00			4385.00	
Packer	5.00			4390.00	27.00 Bottom Of Top Packer
Packer	4.00			4394.00	
Stubb	1.00			4395.00	
Anchor	1.00			4396.00	
Recorder	0.00	8321	inside	4396.00	
Recorder	0.00	6751	inside	4396.00	
Perforations	18.00			4414.00	
Change Over Sub	1.00			4415.00	
Drill Pipe	31.00			4446.00	
Change Over Sub	1.00			4447.00	
Bullnose	3.00			4450.00	56.00 Bottom Packers & Anchor
Total Tool Length:	83.00				

