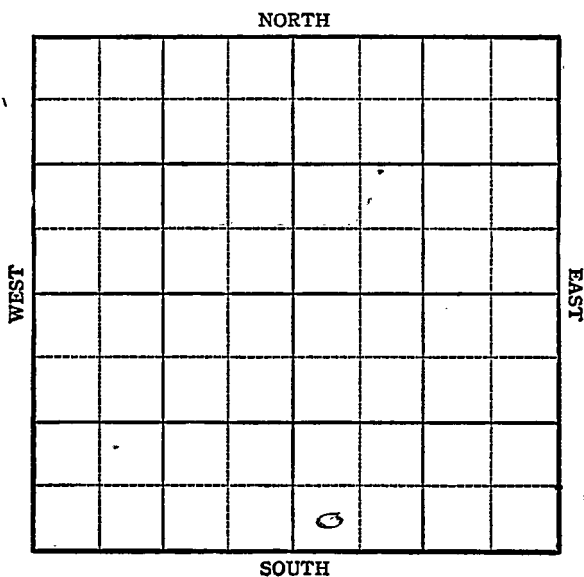


KANSAS

Reno County

Section 30 Township 23S Range 10WWell No. #2 Opal HartnettCompany Mid-Continent

Special

KANSAS

Reno County

Sec. 30 Twp. 23 R. 10W

Well No. #2 Opal Hartnett Farm

Mid-Continent Pet. Corp. Company

Zenith

Ft. from N. Line


330

Ft. from S. Line

Ft. from E. Line

330

Ft. from W. Line



SW SE

Des. 1801

R E P O R T

1944

- 12/13 Moving in rotary
- 12-15 Building rig. (Tel)
- 12-16 Spudded December 15.
Set surface pipe. (Tel)
- 12-19 Spud 12-15-44.
Set 10-3/4" @ 226'
Drilling 1600'

1945

- 1-2 Top Viola 3653' DF
Porosity and saturation 3677-79
Setting pipe. (Mr. Moore)
- 1-2 Top Viola 3653'
Running 9' higher than #1 Hartnett
Small oil show 3677-79
To run pipe to 3675 and drill in
with cable tools. (Tel)
- 1-4 Top Viola 3653'
Total Depth 3679'-show oil
Set 7" @ 3673'
Rigging up standard tools.
- 1-5 Waiting on cement.

OVER

1945

- 1-6 Total Depth 3679'
Waiting on cement.
Laying lead lines and connecting up.
Moving in cable tools.
- 1-8 Waiting on cement and bailing mud.
- 1-9 Top Viola 3653'
Set 7" @ 3673
Total Depth 3693
Drilled plug
Got 1st oil at 3689
Hole filled up 2400' with oil in 10 hours
(Tel)
- 1-11 Swabbing 4 bbls.oil per hour off bottom
No water.
Run tubing.
To acidize. (Telegram)
- 1-12 Top Viola 3653'
Running 5' higher than our #1 Hartnett
Running 25' higher than Stanolind Well to
the SE in NE NE of Sec 31.
Running 13' higher than Texas Co. SW Offset
in SW cor NE NW of Sec 31. (Mr. Beekley)
Running tubing.
To acidize.
- 1-13 Ran tubing.
Will acidize with 1000 gallons today. (Tel)
- 1-15 Ran rods.
Testing on pump - no gauges yet.
Looking better than #1 Hartnett.
To take Potential tomorrow. (Tel)
- 1-16 To take Potential today. (Tel)
- 1-17 Shut down yesterday.
Expect to take Potential today. (Tel)
- 1-18 Pump potential of 340 bbls.oil, per day.
Grind out 5% water. (Telegram)
- 1/24 Viola 3653
7" @ 3673 1000 acid.
TD 3693
Pump 340 Pot. plus 5% water.
Grav. 42.0

COMPLETED

Pool Name ZerithMap No. 47 Sec. 30 Twp. 23 R. 10WWell No. 2 Opal HartnettMid-Continent Pet. Corp CompanyFIRST REPORT

Contractor

SW SE

SECTION PLAT

 Ft. from N. Line330 Ft. from S. Line Ft. from E. Line330 Ft. from W. Line

RenoLocation Rig up

Drilling and Remarks:

moving in rota ry

RECORD

Cased in., ft.Sand Gas Oil Total Depth

PRODUCTION

1st 24 hrs. Nat. 1st 24 hrs. after shot Gas Cu. Ft.Dry Hole Abandoned

Date

DEC 1 3 1944

19

S. J. LEWIS

Scout

Pool Name ZenithMap No. K-47 Sec. 30 Twp. 23 R. 10WWell No. 2 Opal HartnettMid-Continent Pet.


Company

COMPLETED

Contractor

NW SE

SECTION FLAT

 Ft. from N. Line330 Ft. from S. Line Ft. from E. Line330 Ft. from W. Line

Reno

Location

Rig up

Drilling and Remarks:

*Via 3653**7" 3678**1000 acid**Pump 340 B 450**42° S*

RECORD

Cased in., ft.Sand Gas Oil Total Depth 3653

PRODUCTION

1st 24 hrs. Nat. 1st 24 hrs. after shot Gas Cu. Ft.Dry Hole Abandoned

Date

JAN 24 1945 19

S. J. LEWIS

Scout