

KANSAS DRILLERS LOG

WICHITA BRANCH
S. 7 T. 23S R. 36W

API No. 15 — 155 — 20,673
County Number

Loc. 2040' FNL & 2040' FEL

County Reno

Operator
Texas Oil & Gas Corp.

Address
200 W. Douglas, Suite 300, Wichita, Kansas 67202


Well No. #1 Lease Name Hill "B"

Footage Location
2040 feet from (N) (XX) line 2040 feet from (E) (XX) line

Principal Contractor Slawson, Rig #4 Geologist Earl Moore

Spud Date 6-13-80 Total Depth 3650 P.B.T.D. 3633'

Date Completed gas well 7-17-80 Oil Purchaser Gas Purchaser: Peoples Natural Gas



Elev.: Gr. 1742'

DF KB 1747'

CASING RECORD

Report of all strings set — surface, intermediate, production, etc.

Purpose of string	Size hole drilled	Size casing set (in O.D.)	Weight lbs/ft.	Setting depth	Type cement	Sacks	Type and percent additives
Surface	12 1/4"	8-5/8"		260'		250	
Production		2-7/8"		3652'		200	

LINER RECORD

Top, ft. N/A Bottom, ft. N/A Sacks cement N/A

PERFORATION RECORD

Shots per ft. 1 JSPF(16holes) Size & type Miss. Depth interval 3578-86 & 3590-98'

TUBING RECORD

Size N/A Setting depth N/A Packer set at N/A

ACID, FRACTURE, SHOT, CEMENT SQUEEZE RECORD

Amount and kind of material used	Depth interval treated
Dumped 1 bbl 28% HCl + 1 bbl wtr	Same as above
Acidized w/750 gals 15% MCA @ 3 BPM	" " "
Frac w/70-quality foam & 14,500# sand @ 16 BPM	" " "

INITIAL PRODUCTION

Date of first production 1-2-81 Producing method (flowing, pumping, gas lift, etc.) flowing

RATE OF PRODUCTION PER 24 HOURS Oil N/A Gas 400 MCFD Water N/A Gas-oil ratio N/A CFPB

Disposition of gas (vented, used on lease or sold) Sold: Peoples Natural Gas Producing interval(s) 3578-86 & 3590-98'

INSTRUCTIONS: As provided in KCC Rule 82-2-125, within 90 days after completion of a well, one completed copy of this Drillers Log shall be transmitted to the State Geological Survey of Kansas, 4150 Monroe Street, Wichita, Kansas 67209. Copies of this form are available from the Conservation Division, State Corporation Commission, 3830 So. Meridian (P.O. Box 17027), Wichita, Kansas 66217. Phone AC 316-522-2206. If confidential custody is desired, please note Rule 82-2-125. Drillers Logs will be on open file in the Oil and Gas Division, State Geological Survey of Kansas, Lawrence, Kansas 66044.

FIELD: Zenith-Peace Creek (Miss.)

Operator
Texas Oil & Gas Corp.

DESIGNATE TYPE OF COMP.: OIL, GAS,
DRY HOLE, SWDW, ETC.:
Gas

Well No.
#1

Lease Name
Hill "B"

S 7 T 23S R 9 E
W

WELL LOG

Show all important zones of porosity and contents thereof; cored intervals, and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures, and recoveries.

SHOW GEOLOGICAL MARKERS, LOGS RUN,
OR OTHER DESCRIPTIVE INFORMATION.

FORMATION DESCRIPTION, CONTENTS, ETC.	TOP	BOTTOM	NAME	DEPTH
LOG TOPS				
Herington	1466	+281		
Onaga Sh	2242	-495		
Wabaunsee	2278	-531		
Topeka	2733	-986		
Heebner	3038	-1291		
Dg. Grp.	3060	-1313		
Brn. Ls.	3198	-1451		
Lansing	3226	-1479		
Swope	3452	-1705		
Hertha	3480	-1733		
Miss	3574	-1827		
TD	3650			
PBD	3633			
Ran O.H. Logs				
DST #1, 3056-91' (Douglas Sd), w/results as follows:				
IFP/30": 88-111#, fair blow				
ISIP/60": 1185#				
FFP/45": 166-211#, fair blow				
FSIP/90": 1185#				
Rec: 120' mud + 270' GMW				
DST #2, 3576'-3600' (Miss), w/results as follows:				
IFP/30": 66-66#, strong blow				
ISIP/60": 1284#				
FFP/60": 77-77#, GTS 2" 15 MCFD + stable				
FSIP/120": 1284#, building				

USE ADDITIONAL SHEETS, IF NECESSARY, TO COMPLETE WELL RECORD.

Date Received

Harold R. Trapp
HAROLD R. TRAPP

Signature

DISTRICT GEOLOGIST

Title

January 20, 1981

Date

DRILLERS LOG

SEP 8 0 MED

State Geological Survey 7-23-9W
WICHITA BRANCH

OPERATOR: Texas Oil & Gas Corp.
200 West Douglas
Wichita, Kansas 67202

WELL NAME: Hill 'B' #1
C SW NE Sec.7-23S-9W
Reno County, Kansas

CONTRACTOR: Slawson Drilling Company, Inc.
200 Douglas Building
Wichita, Kansas 67202

COMMENCED: 6/13/80

COMPLETED: 6/20/80

RTD: 3650'

SURFACE CASING: 8-5/8" set at 260' with 340 sx cement


PRODUCTION CSG: 2-7/8" set at 3649' with 225 sx cement

0' to 265' 12 1/2" Surface Hole
265' to 1485' Red Bed
1485' to 3091' Lime & Shale
3091' Douglas Sand
3091' to 3650' Lime & Shale
3650' Mississippian
RTD 3650'

STATE OF KANSAS

COUNTY OF SEDGWICK

I, James C. Remsberg, of the Slawson Drilling Company, Inc. hereby state the above is an accurate copy of the Hill 'B' #1 log for Texas Oil & Gas Corp.

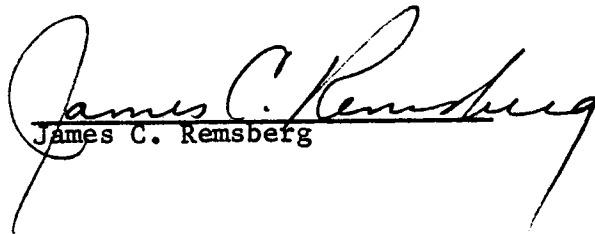
James C. Remsberg

Subscribed and sworn to me this
27th day of June, 1980


Mary Lou Taylor, Notary