

Pawnee


KANSAS

SECTION 9 TOWNSHIP 23 RANGE 15W

WELL NO. #1 Jay T. Smith

COMPANY Stickle Drlg. & Sunray Mid-Continent

NORTH

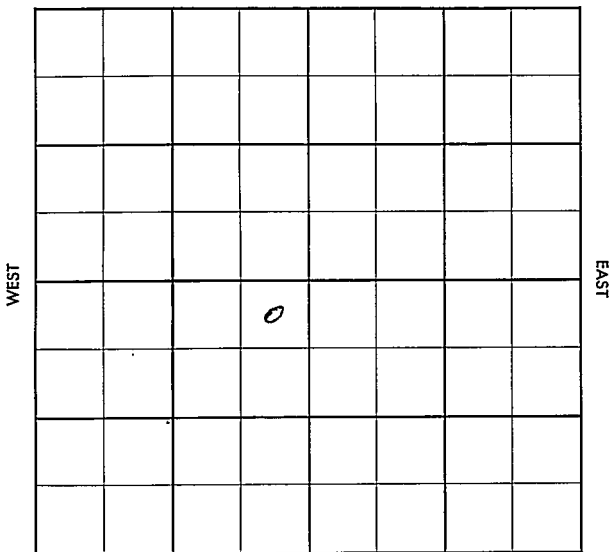

SOUTH

HOT FILE Pawnee KANSAS

SEC. 9 TWP. 23 S R. 15 W

WELL NO. # 1 Smith FARM

COMPANY Stickle Drlg. & SDX
Atlantic Refg. Co. (EXPLORATORY-OB00

CONTRACTOR Stickle Drlg.


Jay Field Area (Wildcat) NORTH

Ft. from N. Line

Ft. from S. Line

Ft. from E. Line

Ft. from W. Line



NE NE SW

SDX-FO Atlantic-DHM

1956 ELEVATION 2026 DF REPORT (TWH6-F01)

4/4 4150' Arbuckle Test
(See Farmout Agreement Letter between SDX & Atlantic Refg. Co.)
5/4 4200' Arbuckle Test
Spudded 5-3-56
8-5/8" @ 289. w/275
TD 290' WOC (DR#88)
5/7 Drlg. 2395'
5/8 Drlg. 2820'
5/9 Drlg. 3290' (FR Tkt)
5/10 Drlg. 3575'.
Top Heebner shale 3502' (Card-Stickle)
5/11 Circulating @ 3770'
No shows. Drlg. ahead. "
5/14 Simpson shale 4081', Simpson sand 4101'
DST #2, 4096-4106, rec 2300' gas, 25' oil cut mud, 60' muddy oil, 120' clean oil, 60' salt wtr. Gravity 43° corrected IP 11400# FFP 1125#
DST #3, 4106-4115', still in Simpson sand. rec 10' mud. BHP 40#.
(Card-Stickle Drlg)
5/15 TD 4115'. Running EL
5/16 Set 5 1/2" @ 4116 w/75 sks.
Should move in cable tools about the first of next week. (Card-Stickle Drlg)
TD 4190' OVER

1956
 5/17 TD 4190' WOC - 5 $\frac{1}{2}$ " csg. (DR#97)
 5/18 TD 4190' MICT
 5/21 TD 4190' Swabbed 40 bbls oil day
 rate. Perfs 4097-4103', Arbuckle
~~Arbuckle~~ Zone - COMPLETE (DR#99)
 5/24 Advised Contract Section - Complete
 5-31 P/2 boph, 8% wtr.
 6-7 P/ 25 bo, 15 bw, 24 hrs.
 P/ 23 bo, 20 bw, 24 hrs.
 6-14 No report
 6-20 P/ 24 bopd $\neq$ 40% wtr.
 Anh. 980', Heebner 3505', L. 3637',
 B.K.C. 3882', C. Chert. 3982',
 Log: Heebner 3501', Tr. 3524',
 Dg. 3539', Dg. 3631', L. 3639',
 B.K.C. 3999', Viola 4043', Simpson
 shale 4079', Simpson sand 4095-4110
 Arb. 4160
 TD 4190'

COMPLETED

County Pawnee Elev. _____
 Sec. 9 Twp. 23 Rge. 15W
 Company Stickle Drilg. & Sunray Mid-Continent
 Farm Name Jay T. Smith No. 1

TOPS	DEPTH	LOG	DATUM	Loc. in Sec.
Anh.				NE NE SW
Tr.				
H.				
Tr.				
Dg.				
Bl.				
L.				
K.C.				Geol. _____
B.K.C.				Contr. _____
Ce.				Stickle
C.				
M.				Pool _____
M.				Wildcat
K.				
Mz.				
Ma.				
V.				
S.				
S.				
A.				
R.				
Pe.				
G.				
T.D.				

50X-10

FIRST REPORT

MAY 9 '55

Date Comm. 5-3-56 Atl. - DHM

8" @ 290/275 drlg. 3299

3751 #2 (M)

M.M

County Pawnee Elev. 2026
 Sec. 9 Twp. 23 Rge. 15W
 Company Stickley Drilling & Sunray Mid-Continent
 Farm Name Jay T. Smith No. 1

TOPS	DEPTH	LOG	DATUM
	980		
	3503	3501	
		3524	
		3539	
BL		3631	
L.	3637	3639	
K.C.			
B.K.C.	3882	3879	
Ce.			
C. <u>chert</u>	3982	3999	
M.			
M.			
K.			
Mz.			
Me. <u>Viola</u>		4043	
V. <u>Sp sh</u>	4081	4079	
S. <u>sd</u>	4101	4095-4110	
S.			
A.		4160	
R.			
PE.			
G.			
TD.	4190		

Loc. in Sec. NE NE SW

Geol.

Contr.

Stickley

Pool GARFIELD

Wildcat

COMPLETE

JUN 20 1956

Date Comm. 5-3-56 Atl. - DHM

8" @ 290/275 drlg. 3299 MAY 16 '56 ADD 980
46

3503 Lsg 3637 DST 3758-76 op 30"
 rec 12' Md BHP 280/30" BKC 3882
 c9 3982 ^{sp sh. 4081} spsd 4101 DST 4096-
 4106 op 1 hr 2300' BHP rec 25'
 OCM + 60' MCO + 120' oil + 60' SW
 FP 30-130 BHP 1125/30" DST
 4106-15 op 1 hr rec 10' Md BHP
 40 #30 RTD 4190 Ran Log R179 5 1/2 c

Co.

Pool marked
by mistake

Sec.

No.

Sec.

T.

R.

MAY 25 5 1/2 @ 4146/75 CO 361
 4101-07 B 1 1/2 Boph + Tr. wto
 no time 13/4 & AV. 1 1/2 Boph
 + 1/2 BW 10 hrs gran 40° corr.

Tennis Pump

MAY 29 '56 P. AV. 2 Boph 8 7/10 wto

JUN 6 '56 P 25 BO + 15 BW / 24 hrs

P 23 BO + 20 BW / 24 hrs

test JUN 13 '56 ✓ JUN 20 '56 X P. 24

Bopd + 40 7/10 wto