

Superior Testers Enterprises, Inc.

R.R. 3, Box 295B, Great Bend, Kansas 67530.

(316) 792-6902

Date 10-14-1999 Location S 1/2 5/8-3/4 36-24 16 W Elevation 2061 K.B. County EDWARDS

Company E G Holl Company L.L.C. Number of Copies 5

Charts Mailed to 6427 East Kellogg P.O. Box 780167 Wichita Kansas 67278-0167

Drilling Contractor Steelers Drilling Rig #4

Length Drill Pipe 1830 I.D. Drill Pipe 3.80 Tool Joint Size 4 1/2" X 1 1/2"

Length Weight Pipe NONE I.D. Weight Pipe NONE Tool Joint Size NONE

Length Drill Collars 248 I.D. Drill Collars 2.25 Tool Joint Size 4 1/2" X 1 1/2"

Top Packer Depth 2094 Bottom Packer Depth 2099 Number of Packers 2 Packer Size 6 3/4"

TESTED FROM 2099 TO 2040 ANCHOR LENGTH 41 TOTAL DEPTH 2040 Hole Size 7 7/8"

LEASE & WELL NO. Enlow 5-36 FORMATION TESTED Hercynian-Kidder TEST NO. 1

Mud Weight 8.7 Viscosity 50 Water Loss 6.4 Chlorides - Pits 4500 D.S.T. _____

Maximum Temp. 85 °F Initial Hydrostatic Pressure (A) 1014 P.S.I. Final Hydrostatic Pressure (H) 937 P.S.

Tool Open F.F.P. from 1:00 A.M. to 1:30 A.M. 30 min

from [B] 62 P.S.I. to [C] 85 P.S.I.

Tool Closed I.C.I.P. from 1:30 A.M. to 2:30 A.M. 60 min

[D] 611 P.S.I.

Tool Open F.F.P. from 2:30 A.M. to 3:30 A.M. 60 min

from [E] 63 P.S.I. to [F] 104 P.S.I.

Tool Closed F.C.I.P. from 3:30 A.M. to 5:00 A.M. 90 min

[G] 615 P.S.I.

Initial Blow Free blow built to the bottom of a 5 gallon bucket in 2 minutes & DECREASE

Final Blow Strong Blow - Gas to Surface in 2 minutes - See Gas flow Report

Total Feet Recovered 190 Gravity of Oil _____ Corrected _____

Feet of	% Gas	% Oil	% Mud	% Water
<u>190</u> Feet of <u>Drilling Mud Gassy</u>				
_____ Feet of _____	% Gas	% Oil	% Mud	% Water
_____ Feet of _____	% Gas	% Oil	% Mud	% Water
_____ Feet of _____	% Gas	% Oil	% Mud	% Water
_____ Feet of _____	% Gas	% Oil	% Mud	% Water
_____ Feet of _____	% Gas	% Oil	% Mud	% Water
_____ Feet of _____	% Gas	% Oil	% Mud	% Water
_____ Feet of _____	% Gas	% Oil	% Mud	% Water
_____ Feet of _____	% Gas	% Oil	% Mud	% Water
_____ Feet of _____	% Gas	% Oil	% Mud	% Water

Remarks _____

Extra Equipment - Jars NONE Safety Joint YES Extra Packer NONE Straddle NONE Hook Wall NONE

Top Recorder No. 78225 Clock No. Electronic Depth 2033 Cir. Sub NONE Sampler NONE

Bottom Recorder No. 13189 Clock No. 47441 Depth 2037 Insurance NONE

Price of Job _____

Tool Operator Gene Sudig

Approved By _____

Superior Testers Enterprises, Inc. shall not be liable for damage of any kind to the property or personnel of the one for whom a test is made, of for any loss suffered or sustained, directly or indirectly, through the use of its equipment, or its statements or opinion concerning the results of any test. Tools lost or damaged in the hole shall be paid for at cost by the party for whom the test is made.

SUPERIOR TESTERS ENTERPRISES INC.


Great Bend, Kansas

CHART DATA

(316) 792-6902

State KANSAS
County EDWARDS
Field

Test Date October 14, 1999
Sec Town Range 36-24S-16W
Report Number 11810

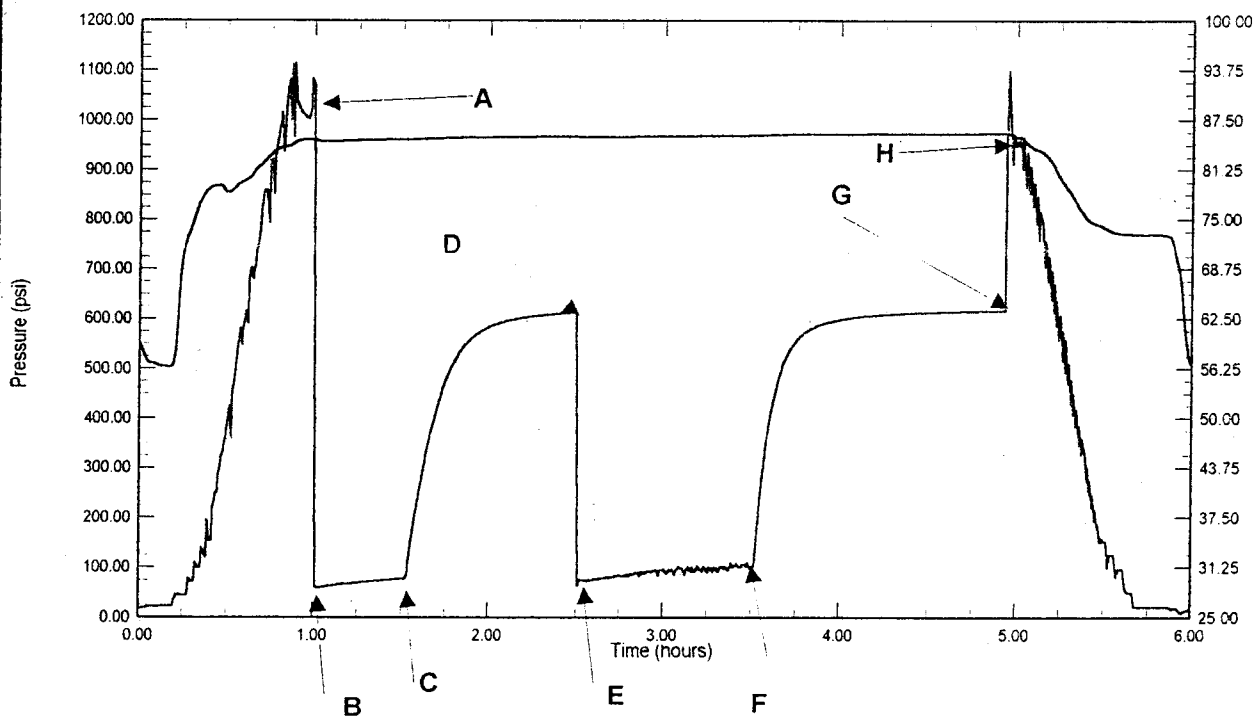

Field Reading

(A)	Initial Hydrostatic Pressure	1014
(B)	Initial Flow Pressure	62
(C)	Final Initial Flow Pressure	85
(D)	Initial Shut-In Pressure	611
(E)	Initial Final Flow Pressure	63
(F)	Final Flow Pressure	104
(G)	Final Shut-In Pressure	615
(H)	Final Hydrostatic Pressure	937

ELECTRONIC RECORDER DEPTH 2134 FT, RECORDER NUMBER 78225

Company: F.G. IOLI COMPANY L.L.C. Lease & Well No. ENLOW #5-36 Test # 1 Date: 10-14-1999
SEC. 36 TWP. 24S RGE. 16

(316) 792-6902

#

Report Number 11810

[illegible]