

31-25-10W


WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
503 East Murdock, Wichita, Kansas

X ✓

Company- L.C. SMITHERMAN OIL PRODUCER
Farm- Zink No. 1

SEC. 31 T. 25 R. 10W
NE NE NE

Total Depth. 44077'
Comm. 2-14-56 Comp. 3-1-56
Shot or Treated.
Contractor. L.C. Smitherman Drlg. Co.
Issued. 4-16-57

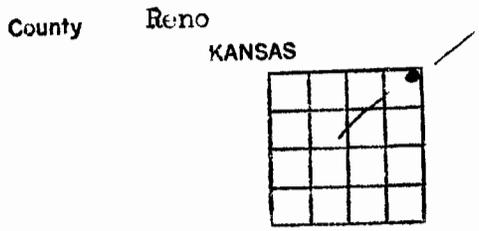

Elevation. 1780' DE
Production. Dry

CASING:

8 5/8" 320' w/300 sx cem.

Figures indicate Bottom of Formations.

sand	150
sand-red bed	180
red bed-shale	227
lime	320
shale-red bed	410
shale-shells	1562
shale-lime-shells	1675
shale-shells	1890
shale-lime shells	2020
stickey shells-shale-	
lime	2110
shale-lime-shells	2188
shale-lime	3005
lime-shale brks	3078
lime-chert	3121
lime-shale	3177
sand-shale	3200
lime-shale	3355
shale-sdy	3455
shale-lime	3504
lime	3983
chert	3997
lime-chert	4032
lime	4073
lime-chert	4085
shale-lime	4198
chert-lime	4254
lime	4308
shale-sand-Simpson	4320
lime-shale	4391
lime-shale-Arbuckle	4407
Total Depth RTD	
TOPS: Scout	
Heebner	3318
Toronto	3333
Douglas sand	3405
Brown lime	3498
Lansing	3512
B/Kansas City	3870
Mississippi	3961
Kinderhook	4035
Viola	4194
Simpson shale	4288