LEASE	WELL NO.	TEST NO.	COMPANY	DISTRICT
JOHN BLACK	I	2	BEDELL & CATT DRILLING COMPANY, INCORPORATED	WICHITA

Halliburton
OIL WELL CEMENTING CO.

LOCATION	SEC. -
FIELD	-
COUNTY	Sedgwick
STATE	Kansas
CONTRACTOR	Company Tools

MUD DATA

Kind	Chemical	
Weight	10.3	lbs.-gal.
Viscosity	35	Sec.
Filter Loss	- c. c. Filter Cake 2/32	in.
Est. Gauge Depth Temp.	Calc. 100	F°
Time Tool Open	35 minutes	
Time Closed In.	20 minutes	
Depth BT. Gauge	291[illegible]'	
BT. P. R. D. No.	396	Blanked Off No
12 Hr. Clock No.	2253	

Pressure Readings	Field	Office Corrected	
Initial Hydro Mud Pressure		1545	p.s.i.
Initial Flow Pres.		21	p.s.i.
Final Flow Pres.		55	p.s.i.
Closed in Pres.		1100	p.s.i.
Final Hydro Mud Pressure		1515	p.s.i.

HOLE AND TOOL DATA

Total Depth	2933'	Casing Perforations	Top - Bottom -
Top Packer Depth	2924'	Bottom Packer Depth	-
Casing or Hole Size	7 7/8"	Liner or Rathole Size	-
Formation Tested	Kansas City		
Size Drill Pipe	4½" API FH	Size Drill Collars	6"
Size Bottom Choke	5/8"	Size Surface Choke	1"
Size Hook Wall Packer	-	Size Rings -	No. Rings -
Size & Type Wall Packer	6 3/4" ESA		No. Packers 1
Size & Length Anchor	4½" x 9'		
PRD Device No.	1982	Depth 2931'	Blanked Off Yes

Date	4-30-56
Ticket No.	33419
HOWCO DISTRICT	El Dorado
Kind of Job	Open Hole Test
Price	$215.00
Second Packer Assembly	-
Safety Joint	-
Extra Folder Charge	-
Jars	-
Total	$215.00
Witnessed By	Mr. D. Smith
Tester	Pointer

REMARKS: Formation tested from 2924' to 2933' in the Kansas City. Tool opened @ 10:57 P. M. with a light blow and decreasing to weak for the remainder of the test, closed in pressure taken @ 11:32 P. M., and started off bottom @ 11:52 P. M. Recovered 45' of slightly oil cut & slightly watery mud, and 60' of very slight oil cut watery mud salt water.

Amount of Cushion None — All depths measured from Rotary Bushing — No. Folders Reproduced 5

HOWCO 803-R3 25M 199M (Printed in U. S. A.)—Southwestern—4806E

TIME

PRESSURE

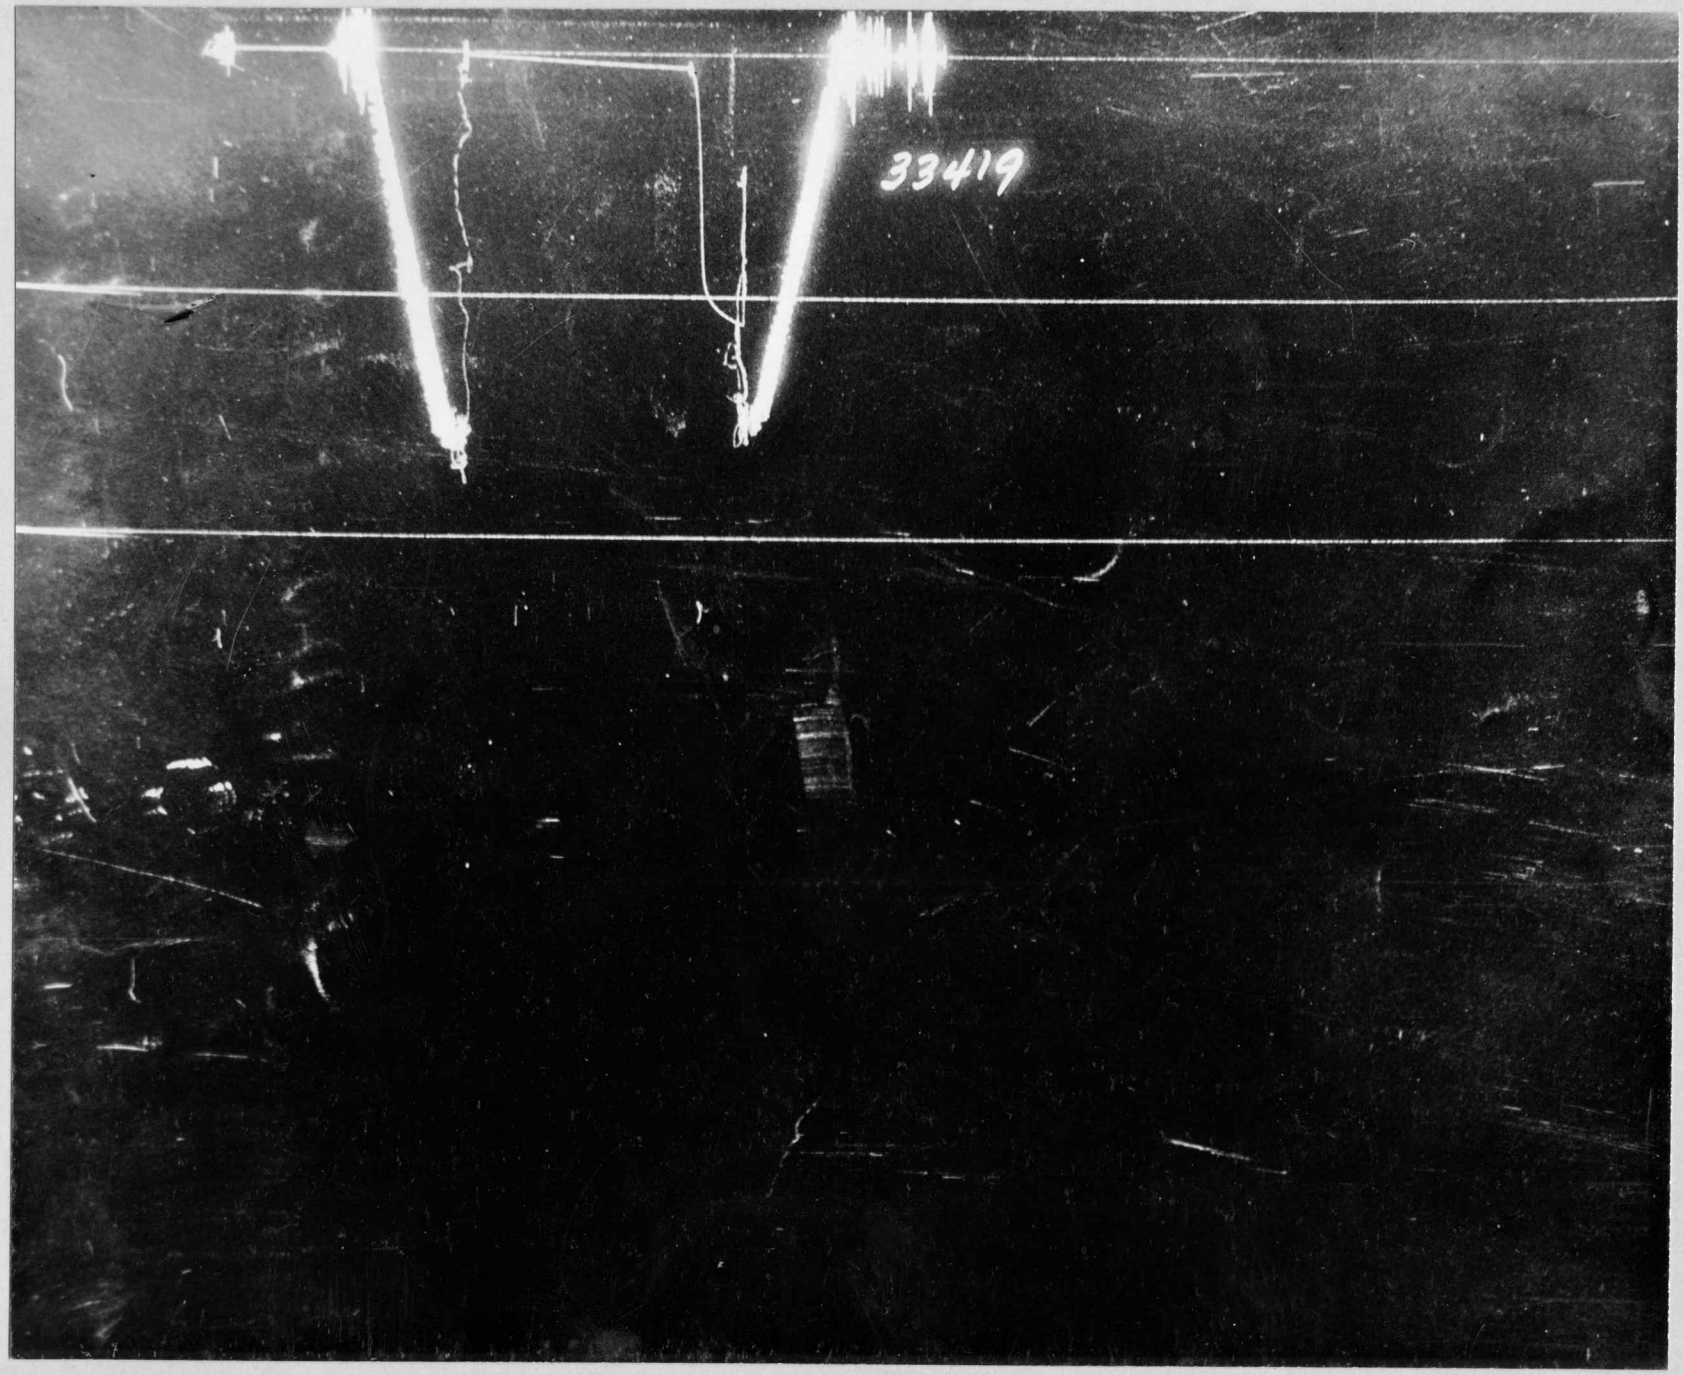

Each Horizontal Line Equal to 1000 p.s.i.