

KANSAS DRILLERS LOG

API No. 093 — 20,212
County Number

Operator
W. B. Osborn, Operator

Address
Box 17968 San Antonio, Texas 78286

Well No. #1-A Lease Name Smalley

Footage Location
1950 feet from (N) ~~35~~ line 2310 feet from (E) ~~35~~ line


Principal Contractor Geologist
Service Drilling Company Walter M. Ralls

Spud Date 7.17.75 Total Depth 2842 Log P.B.T.D. 2850 Drln 2830

Date Completed 7.21.75 Oil Purchaser
None: Dry Gas Well

S. 3 T. 25 R. 38 E. W
Loc. 1950' FNL & 2310' FEL

County Kearny



Locate well correctly
Elev.: Gr. 3128'

DF KB 3135'

CASING RECORD

Report of all strings set—surface, intermediate, production, etc.

Purpose of string	Size hole drilled	Size casing set (in O.D.)	Weight lbs/ft.	Setting depth	Type cement	Sacks	Type and percent additives
Surface	12 1/4"	8 5/8"	24#	510	Howcolite	250	
					Common	150	3% CaCl
Production	7 7/8"	5 1/2"	14# 15.5#	2841	Litewate	500	
					Pozmix	200	Salt Sat.

LINER RECORD

Top, ft. Bottom, ft. Sacks cement

PERFORATION RECORD

Shots per ft. Size & type Depth interval
2 Welex-No skip 2624-2766'

TUBING RECORD

Size 1 1/2" Setting depth 2813' Packer set at

ACID, FRACTURE, SHOT, CEMENT SQUEEZE RECORD

Amount and kind of material used Depth interval treated

2500 Gal. MCA; 100,000# Sand, 100,000 Gallons water 2624-2766

INITIAL PRODUCTION

Date of first production 9.1.75 Producing method (flowing, pumping, gas lift, etc.)
Flowed 3500 MCF to atmosphere. Waiting on Pipeline Connections

RATE OF PRODUCTION PER 24 HOURS Oil Gas Water Gas-oil ratio
bbis. MCF bbls. CFPB

Disposition of gas (vented, used on lease or sold) Producing interval (s)

INSTRUCTIONS: As provided in KCC Rule 82-2-125, within 90 days after completion of a well, one completed copy of this Drillers Log shall be trans-
mitted to the State Geological Survey of Kansas, 4150 Monroe Street, Wichita, Kansas 67209. Copies of this form are available from the Conservation
Division, State Corporation Commission, 3830 So. Meridian (P.O. Box 17027), Wichita, Kansas 66217. Phone AC 316-522-2206. If confidential custody
is desired, please note Rule 82-2-125. Drillers Logs will be on open file in the Oil and Gas Division, State Geological Survey of Kansas, Lawrence, Kansas
66044.

Operator		DESIGNATE TYPE OF COMP.: OIL, GAS, DRY HOLE, SWDW, ETC.:
Well No. 1-A	Lease Name Smalley	Dry Gas Well
S 3 T 25S R 38 E W		


WELL LOG


Show all important zones of porosity and contents thereof; cored intervals, and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures, and recoveries.

SHOW GEOLOGICAL MARKERS, LOGS RUN,
OR OTHER DESCRIPTIVE INFORMATION.

FORMATION DESCRIPTION, CONTENTS, ETC.	TOP	BOTTOM	NAME	DEPTH
Shale	0	160		
Shale	160	1500		
Shale, anhydrite	1500	2261		
Shale, lime	2261	2725		
Shale, lime	2725	2850	- Drlr. T.D.	
		2842	- Log T.D.	

USE ADDITIONAL SHEETS, IF NECESSARY, TO COMPLETE WELL RECORD.

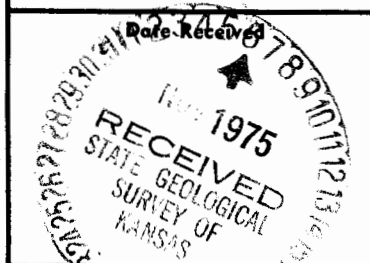


 Signature
 Production Manager
 Title
 September 26, 1975
 Date