


Section 4 Township 26 Range 13 W

Well No. # 2 G. Dodson

Company Skelly Oil

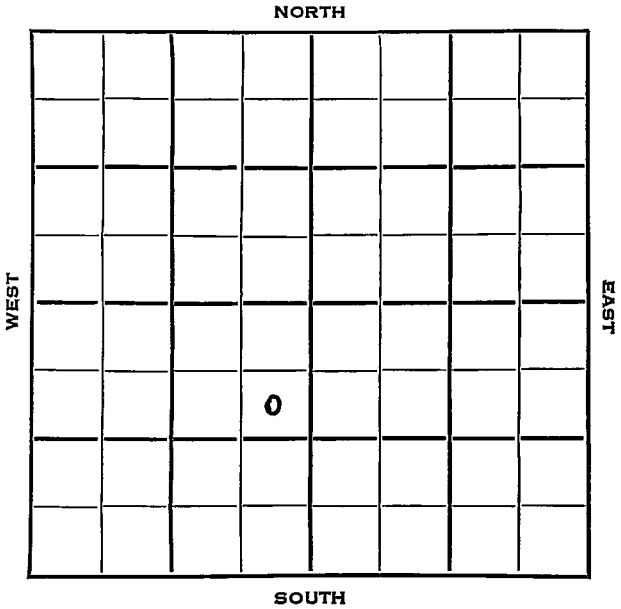

Sec. 4 Twp. 26 R. 13W

Well No. #2 G. Dodson Farm

Skelly Oil Company

Contractor

E. Frisbie Pool


990 Ft. from N. Line

Ft. from S. Line

330 Ft. from E. Line

Ft. from W. Line

SE NE SW



1953

Elev. 1944'

REPORT

- 5/27 Location
- 6/3 8" @ 833
- 6/10 Drlg. 3200'
- 6/24 Heeb 3536, Br li 3698, Lans 3729, Miss 4132, Cong 4111, K H 4161, Misner Zo 4177, P 4188, Simp 4284
DST 4282-4318, 2 hrs., 1505' free oil, 120' HOCM, 1005#
AB ? 4363
RTD 4376
5" @ 4376
- 7/1 NR
- 7/8 CO 4366 102/4299-4316
S/147 BO 12 hrs. Hyd
S/20 BOPH 3 hrs.
- 7/22 P/ 178 BO / 6 BW 20 hrs.

OVER

1953
7/29

Spud 5-28-53

Oil Well

TD 4376

8" @ 833

Heeb 3536, Br Lime 3698, Lans 3729,

Miss 4132, Cong 4111, KH Kh 4161,

Misener 4177, Viola 4188, Simp 4284

DST 4282-4318, opn 2 hrs., rec. 1505'

free oil, 120' hocm, 1005#

Arb 4363

TD 4376

5" @ 4376

CO to 4366, 102/4299-4316, S/147 bo
12 hrs., Hydro.

S/20 boph 3 hrs., P/50 bo 4 hrs.

P/141 bo 4 bw 10 hrs.

P/178 bo 6 bw 20 hrs.

Comp. 292 bopd 6 bw

COMPLETED

O W P B

FORM 513 SUNRAY

County Praire Elev. 1944 DF
 Sec. 4 Twp. 26 Rgs. 13W
 Company Skelly Oil Co.
 FarmName G. Dodson No. 2

TOPS	DEPTH	LOG	DATUM	Loc. in Sec.
Anh.				SE NE SW
TP.				
H.				(OWPB)
Tr.				
Dg.				
Bl.				
L.	3729			Geol.
K.C.	3843 3899			
B.K.C.				Contr.
Ce.				
C.				
M.	4132			Pool
M.				
K.				Frisbie
Mz.	4177			
Mo.				
V.				
S. sh	4284			AUG 7 1937 COMPLETE FIRST REPORT
S.				
A.	4363			
R.				
Pe.				
G.				
TD. OTD	4376			

Date Comm. 5" @ 4376 - New Info. - PB 4218, Perf 84/4182
96, Sand oil frac B/5 bo in 1 hr. PB 4025,
perf 49/3991-99, 750A, Swb 45 bo no wtr in 7
hrs. PB 3974, 55/3954-63, 750A, Swb 50 bo +
9 bw in 6 hrs. PB 3934, 30/3920-30, 54/3905-
14, 1500A, Swb 45 bo + 22 bw in 11 hrs. PB
3886, 43/3874-80, 145/3841-65, 750A, Swb 15
bo no wtr. 3 hrs, DP to 4022, P/223 bo + 35
bw 24 hrs KC 3841 COMPLETE