

MEAD #1
WELL REPORT
TERRY MCLEOD

Sunday	5/3/09	7:00 AM	Depth	2357
Monday	5/4/09	7:00 AM	Depth	2981

TOPS:

Harrington	2381	-208
Vincent Fisher		-20
Krider	2437	-364
Vincent Fisher		-24
Cottonwood	2885	-712
Vincent Fisher		-21
Neda	2936	-763
Vincent Fisher		-22
Red Eagle	3015	-842
Vincent Fisher		-24

Circulated for samples @ 3025 30 minutes-no show-no kick. No gas kicks
in any other zones.
Board 2605.93 feet
Strap 2606.43 feet
Difference .50 feet long

Herrington
2381
(-208) -20

Krider
2437
(-364) (-24)

Cottonwood
2885
(-712) (-21)

Neva
2936
(-763) (-22)

Red Eagle
3015
(-842) (-24)

Lost Circ 2605'
came out of hole

Strapped pipe on
Return

Board 2605.93
STRAP 2606.43,
.50' Long

Depth Sunday 2357' - One Location
Monday 2981'

OFS @ 3025'
RED Eagle N.S.
No Kick

No GAS Kicks from 2557' to 3025'

All Comparisons are too Vincent oil
No 1 fischer in Sec. 23.

#2 Derley

Tap -1318
Hb -1694
LANS -1836
BKC -2184

SE-NW-SE-NW

Lind -2360
V -2430
Simp -2447
ARB -2530
RTD -2630

MEAD #1
WELL REPORT
TERRY MCLEOD

Tuesday 5/5/09 Depth 3576

Wabaunsee
3175 (-1002)
(-25)

Langdon sd
3242 (-1069)
(-23)

N.S. N.K.
CFS @ 3270'

Stotler
3317 (-1144)
(-28)

Howard Lime
3452 (-1278)
(-26)

N.S. N.K.
CFS 3465'

Topeka
3522 (-1349)
(-30)
6 units gas @ 3560'

Expect
Heebner @ 3904'
LKC @ 4050'

Plugged BIT @ 3606'
making trip

Dick,
We have had a complete "seismic bust". Our only hope now is the Mississippi.
Should have Lansing-Kansas City tomorrow and Mississippi Thursday.

Dick,
We have had a complete "Seismic Bust" - our
only hope now is the Mississippi. ~~Which if~~

~~it comes in the~~ - Kansas City
Should have Lansing

TO: Glen Rupe

316 689 3525

tomorrow + Miss
Thursday.

Mead #1

MAY 5th - 09

Depth 3576

Wabaussee

3175

(-1002) -25

Langdon sd

3242

(-1069) (-23)

(N.S. NK

CFS@

3270'

STOTLEN

3317

(-1144) -28

Howard Lime

3452

(-1278) -26

(CFS 3465')

(N.S. N.K.)

Topeka

3522

(-1349) (-30)

6 u k @ 3560'

Expect

Huebner @ 3904'

LKC @ 4050'

(plugged BIT @ 3606'
making TRIP)

MEAD #1
WELL REPORT
TERRY MCLEOD

Thursday 5/7/09

Depth 4406

Brown Line

4027 (-1854)
(-22)

Lansing

4036 (-1863)
(-21)

B/KC

4355 (-2182)
(-22)

"B" zn 4056'

Is. Crm-Htan Foss

Sli odor

CFS 4075' 4 UK

"F"ZN

4128' (-1955)
(-24)
001 + ODC 0
N.S. N.K.
CFS @ 4135'

"H"ZN

4182 (-2009)
(-24)

good ooc 0 N.S.

Sli odor - Sli Flour

CFS @ 4190'

JZN 0

4242 (-2069)
(-24)
foss 0
N.S. N.K. No Odor
CFS @ 4250'

K

4270 (-2097)

Sli 001 + 00C

gd 0. N.S. N.K.

CFS 4280'

(gd 45 u.k. @ 4350'
RX TIGHT & CHERTY

Drilling to Mississippi

4406 MAY 7, 2009 7am

Brown Lime
4027 (-1854)
(-22)

Lansing
4036 (-1863)
(-21)

B/KC
4355 (2182)
(-22)

"B" ZN 4056'
Is. Cim-Htan Fess
SLI odor
CFS 4075' 4 UK

"F" ZN
4128' (1955) -24
ool + ooc ϕ . N.S N.K
CFS @ 4135'


"H" ZN 4182 (-2009)
..-24
gd ooc ϕ . N.S.
SLI odor-SL' Flour
CFS @ 4190'

J ZN ϕ .
4242 (-2069) -24.
foss ϕ N.S N.K.
NO odor
CFS @ 4250'

K 4270 -2097'
SLI ool + ooc
gd ϕ . N.S - N.K
CFS 4280'

(gd 45 U.K. @ 4350')
RX TIGHT + cherty

DRILLING TO
MISS

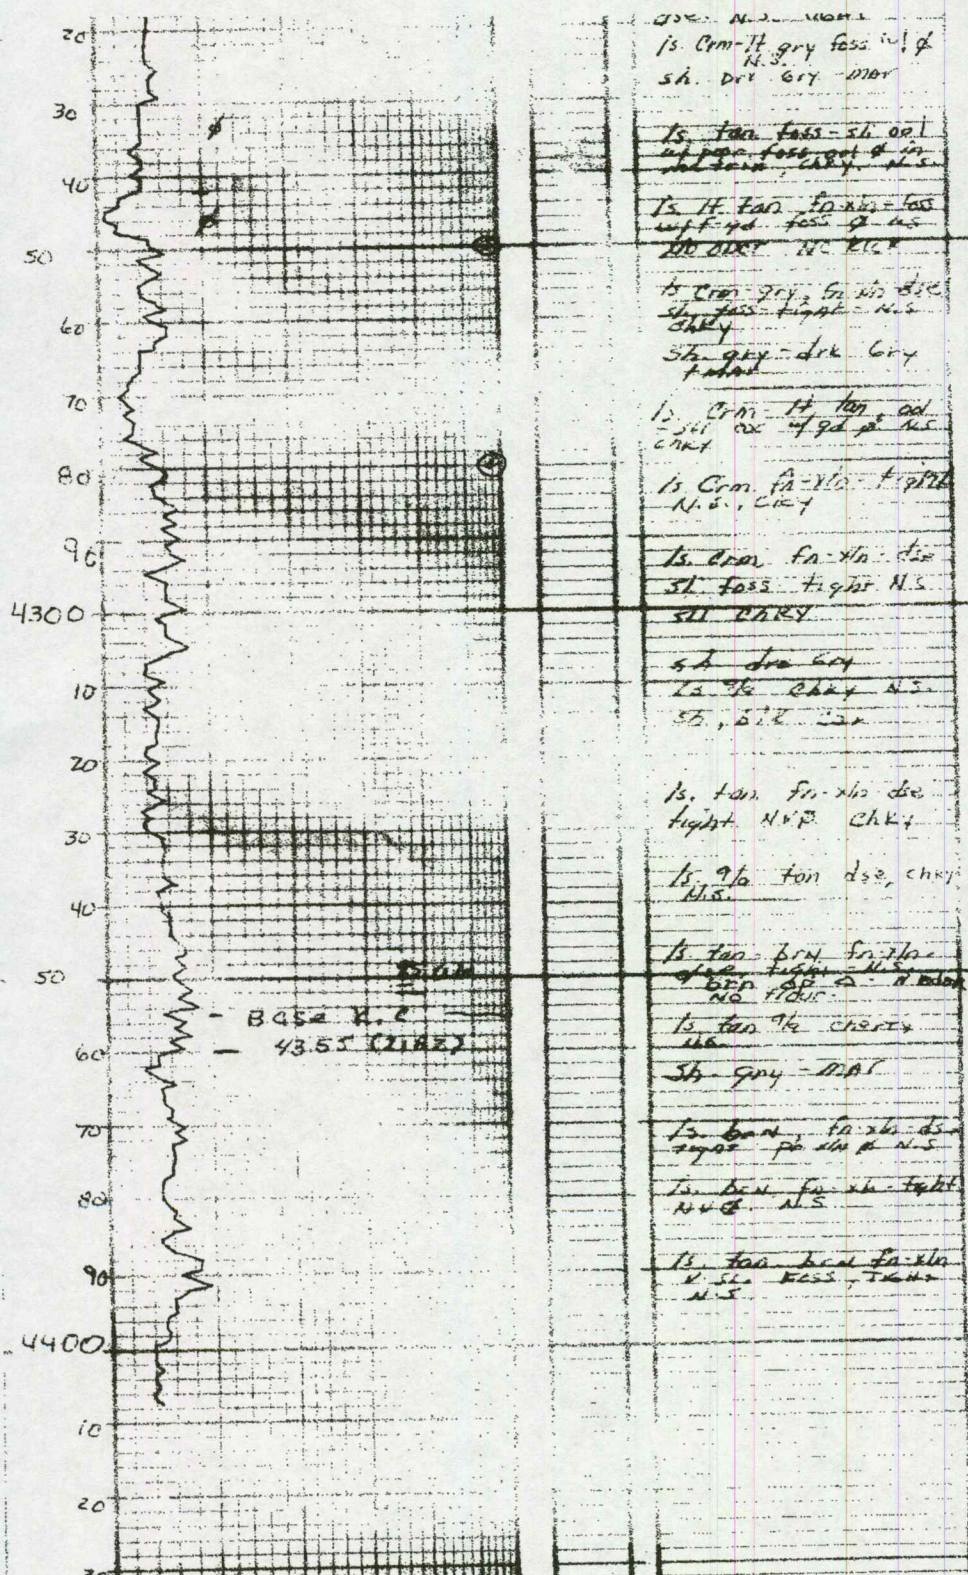

MEAD #1
WELL REPORT
TERRY MCLEOD

Thursday 5/7/2009 2:00 p.m.

Cherokee Shale
4527 (-2354)
(-18)

Mississippi (0) zero

Kinder Hook Sand
4556 (-2380)
(-9)

Total Depth 4572'
Show Kinder Hook Sand-Oil
32 units gas kick

Drill stem test scheduled with Trilobite.
Test 4502 to 72
Should have test results back by midnight.

MEAD #1
WELL REPORT
TERRY MCLEOD

Friday 5/8/2009 Depth 4572 7:00 AM

Marmaton 4410 (-2237)

Mississippi (0) zero

Kinder Hook Sand 4556 (-2387)

Running 15' low to Key Well

Hard Clean Kinder Hook Sand 4575 (-2406)

30' Low

Drill Stem Test 4572 Total Depth

Opposite KHS

Drilled 4540 2-3 minutes per ft.

Recovered 435 ft of gas in pipe

30 ft. drill mud

Stron blow off of bottom of bucket.

open 30 min, shut in 30 min

2nd open 60 to 90 min

No gas to surface. Shut in pressure. 145-162

initial flow 21. Final flow 20. Shut in 18-21 lbs.

4502-4572

Drilling ahead Kinder Hook Sand. Should be at
Viola line by noon.

* Will have Glen call you when he comes in. *