

WELL COMPLETION REPORT AND DRILLER'S LOG

KANSAS State Geological Survey
WICHITA BRANCH

API No. 15 — 069 — 20,115
County Number


S. 29 T. 26 R. 29 ^{XK}W

Loc. NW NW NW

County Gray

640 Acres

N



Locate well correctly

Elev.: Gr. 2749

DF KB 2755

Operator
Gear Petroleum Co., Inc.

Address
300 Sutton Place, Wichita, Kansas 67202

Well No. 1 Lease Name Jury

Footage Location
330 feet from (N) line 330 feet from (W) line

Principal Contractor Slawson Drilling Co. Geologist Benny Singleton

Spud Date 4-29-81 Date Completed 5-6-81 Total Depth 5125 P.B.T.D.

Directional Deviation Oil and/or Gas Purchaser Inland Crude

CASING RECORD

Report of all strings set — surface, intermediate, production, etc.

Purpose of string	Size hole drilled	Size casing set (in O.D.)	Weight lbs/ft.	Setting depth	Type cement	Sacks	Type and percent additives
Surface	12 1/2	8 5/8		410	Common	290	2% Gel, 3% CC
Production	7 7/8	4 1/2		5098	Common	125	None

LINER RECORD

PERFORATION RECORD

Top, ft.	Bottom, ft.	Sacks cement	Shots per ft.	Size & type	Depth interval
			3	Jet	4882-88

Size	Setting depth	Packer set at
2"	4890	

ACID, FRACTURE, SHOT, CEMENT SQUEEZE RECORD

Amount and kind of material used	Depth interval treated
1000 gal MA; 1000 Reg., 6000 MOD 202, 1000 reg	4882-88

INITIAL PRODUCTION

Date of first production 6-3-81 Producing method (flowing, pumping, gas lift, etc.) Pumping

RATE OF PRODUCTION PER 24 HOURS Oil 150 bbls. Gas TSTM MCF Water Tr. bbls. Gas-oil ratio CFPB

Disposition of gas (vented, used on lease or sold) Producing interval (s) 4882-88

INSTRUCTIONS: As provided in KCC Rule 82-2-125, within 90 days after completion of a well, one completed copy of this Drillers Log shall be trans-
mitted to the State Geological Survey of Kansas, 4150 Monroe Street, Wichita, Kansas 67209. Copies of this form are available from the Conservation
Division, State Corporation Commission, 245 No. Water, Wichita, Kansas 67202. Phone AC 316-522-2206. If confidential custody is desired, please note
Rule 82-2-125. Drillers Logs will be on open file in the Oil and Gas Division, State Geological Survey of Kansas, Lawrence, Kansas 66044.

Operator Gear Petroleum Co., Inc.		DESIGNATE TYPE OF COMP.: OIL, GAS, DRY HOLE, SWDW, ETC.:
Well No. 1	Lease Name Jury	Oil
S 29 T 26 R 29 E xx W		

WELL LOG			SHOW GEOLOGICAL MARKERS, LOGS RUN, OR OTHER DESCRIPTIVE INFORMATION.	
Show all important zones of porosity and contents thereof; cored intervals, and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures, and recoveries.				
FORMATION DESCRIPTION, CONTENTS, ETC.	TOP	BOTTOM	NAME	DEPTH
DST #1 45-60-60-90, GTS 50" of 2nd open, gauged 31,600 cfgd, 5" later was TSTM, Rec. 750' gassy oil & 180' GCMO, IFP 121-253, FFP 283-352, SIP 919-908	4958	4990	LOG TOPS	
			Anhydrite	1764 +991
			Heebner	4112 -1357
			Toronto	4129 -1374
			Lansing	4206 -1450
			Cherokee	4477 -1722
			Ste. Gen.	4923 -2168
			St. Louis	4980 -2225
			"C" Zone	5084 -2329
			LTD	5126 -2371
			RTD	5125 -2370

Date Received	USE ADDITIONAL SHEETS, IF NECESSARY, TO COMPLETE WELL RECORD.		
	 _____ Jim Thatcher Engineer Signature _____ Title 6/8/81 Date		

29-26-29W

STATE OF KANSAS

State Geological Survey
WICHITA BRANCH

OPERATOR: Gear Petroleum Company, Inc.
300 Sutton Place
Wichita, Kansas 67202

WELL NAME: #1 Jury
NW NW NW Sec. 29-26S-29W
Gray County, Kansas

CONTRACTOR: Slawson Drilling Company, Inc.
200 Douglas Building
Wichita, Kansas 67202

COMMENCED: 4/28/81

COMPLETED: 5/5/81

RTD: 5125'

SURFACE CASING: 410' PREVIOUSLY SET IN PLACE

PRODUCTION CASING: 4-1/2" set at 5097' with 125 sx

410' to 1742' Sand & Shale
1742' to 2495' Shale & Lime
2495' to 3510' Lime & Shale
3510' to 3718' Limestone & Shale
3718' to 4575' Lime & Shale
4575' to 4707' Lime
4707' to 4990' Lime & Shale
4990' to St. Louis
4990' to 5020' Lime & Shale
5020' to 5118' Dolomite - Lime - Chert
5118' to 5125' Lime & Shale
RTD 5125'

RECEIVED
STATE CORPORATION COMMISSION


JUN 10 1981

STATE OF KANSAS

COUNTY OF SEDGWICK

CONSERVATION DIVISION
Wichita, Kansas

I, James C. Remsberg, of the Slawson Drilling Company, Inc.
hereby state the above is an accurate copy of the #1 Jury log for
Gear Petroleum Company, Inc.

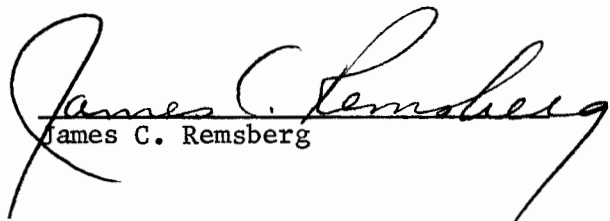
James C. Remsberg