2-27-13W

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas


Company- M. B. ARMER
Farm- Evans No. 1

SEC. 2 T. 27 R. 13W
NE NE NE

Total Depth. 4325 Corr.
Comm. 9-30-52 Comp. 10-20-52
Shot or Treated.
Contractor. M. B. Armer
Issued. 11-22-52

County Pratt

KANSAS



CASING:
8 5/8" 480' cem. w/300 sx
5 1/2" 4329' cem. w/100 sx corr. to 4325'

Elevation. 1916 DF
1918 Gd.
Production. Dry

Figures Indicate Bottom of Formations.

| | |
|---|---|
| shale & sand | 220 |
| red bed & shells | 300 |
| red bed, shale & shells | 409 |
| sand | 450 |
| red bed & shells | 714 |
| sand, shale & shells | 775 |
| red bed, sand & shells | 850 |
| shale & red bed | 872 |
| anhydrite | 905 |
| shale & shells | 1370 |
| shale, lime & shells | 1760 |
| shale & lime | 2700 |
| shale & shells | 2855 |
| shale | 3000 |
| shale & shells | 3070 |
| shale, lime & shells | 3165 |
| shale & lime | 3245 |
| shale & shells | 3335 |
| lime | 3370 |
| lime broken | 3494 |
| lime | 3650 |
| lime & shale | 3749 |
| lime | 4130 |
| shale & lime | 4160 |
| lime & chert | 4218 |
| shale | 4223 |
| lime | 4250 |
| shale | 4283 |
| shale & lime | 4329 RTD |
| corr. to 4325' | |
| Total Depth | |

| | |
|---|---|
| Tops: R.B. Meas. | |
| Heebner | 3565 |
| Brown Lime | 3731 |
| Lansing-Kansas City | 3749 |
| Mississippian | 4171 |
| Kinderhook | 4178 |
| Kinderhook Chert | 4186-4203 |
| Viola | 4223 |
| Simpson | 4263 |

FORM 252-B
10M 10-50 PETROL

Pratt KANSAS O.W.W.O.

Sec. 2 Twp. 27 R. 13W

Well No. #1 Evans Farm

~~M. B. Armer~~ W & W Drlg Co. Company

Armer Contractor

Iuka - Carmi Pool

330 Ft. from N. Line


Ft. from S. Line

330 Ft. from E. Line

Ft. from W. Line

NE NE NE

CRA - DHM

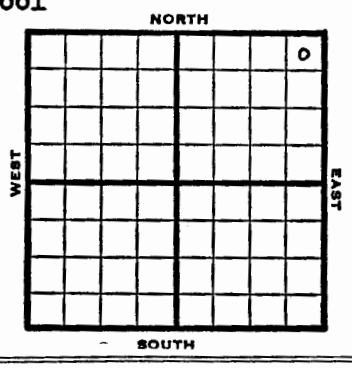


| 1952 | Elev. 1916' REPORT |
|---|---|
| 10/1 | MIR |
| 10/8 | 8" @ 480'<br>Anhy 870<br>Drlg. 3070' |
| 10/15 | KC 3749<br>DST 3912-19, 1 hr., 30' SOCM<br>Drlg. 4048' |
| 10/22 | Simp. 4269'<br>DST 4273-4319', 1/2 hr, 550' oil<br>200' OCM, 1040# RTD 4325'<br>5" @ 4325' |
| 10/29 | CO 4325 gamma-ray 4278-86 500A<br>S/1 BOPH |
| 11/5 | D&A TD 4325' 8" @ 480<br>Anhy 870 KC 3749<br>DST 3912-19 open 1 hr. rec. 30' socm<br>Simp. 4269<br>DST 4273-4319 open ½ hr. rec. 550' oil<br>200' ocm 1040# TD 4325<br>5" @ 4325 CO to 4325 40/ 4278-86<br>500 A S/ 1 boph PB 4268<br>15/ 4256-61 500 A S/ 35' fluid ph<br>D&A |

ABANDONED

OVER

O.W.W.O.

1953

#1 Evans

6/3 Oil Well
TD 4325'
KC 3749, Simp 4269,
OTD 4325'
CO to 4325
Comp. 44 bopd.

FIRST REPORT

COMPLETED